

## *Getting Started*

---

&UHDWLYH 6RXQG %ODVWHU /LYH 9D0XH  
&UHDWLYH \$XGLR 6RIWZDUH

Information in this document is subject to change without notice and does not represent a commitment on the part of Creative Technology Ltd. No part of this manual may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, for any purpose without the written permission of Creative Technology Ltd. The software described in this document is furnished under a license agreement and may be used or copied only in accordance with the terms of the license agreement. It is against the law to copy the software on any other medium except as specifically allowed in the license agreement. The licensee may make one copy of the software for backup purposes.

Copyright © 1998 by Creative Technology Ltd. All rights reserved.

Version 1.01

September 1998

Sound Blaster and Blaster are registered trademarks, and the Sound Blaster Live! logo, the Sound Blaster PCI logo, EMU10K1, E-mu Environmental Modeling, Environmental Audio, Creative Multi Speaker Surround, and DynaRAM are trademarks of Creative Technology Ltd. in the United States and/or other countries. E-Mu and SoundFont are registered trademarks of E-mu Systems, Inc. SoundWorks is a registered trademark, and MicroWorks, PCWorks and FourPointSurround are trademarks of Cambridge SoundWorks, Inc. Microsoft, MS-DOS, and Windows are registered trademarks of Microsoft Corporation. All other products are trademarks or registered trademarks of their respective owners.

**This product is covered by one or more of the following U.S. patents:**

4,506,579; 4,699,038; 4,987,600; 5,013,105; 5,072,645; 5,111,727; 5,144,676; 5,170,369; 5,248,845; 5,298,671; 5,303,309; 5,317,104; 5,342,990; 5,430,244; 5,524,074; 5,698,803; 5,698,807; 5,748,747; 5,763,800; 5,790,837.

# Creative End-User Software License Agreement

Version 2.0, June 1998

**PLEASE READ THIS DOCUMENT CAREFULLY BEFORE USING THE SOFTWARE. BY USING THE SOFTWARE, YOU AGREE TO BE BOUND BY THE TERMS OF THIS AGREEMENT. IF YOU DO NOT AGREE TO THE TERMS OF THE AGREEMENT, DO NOT OPEN THE SEALED DISK PACKAGE, INSTALL OR USE THE SOFTWARE. PROMPTLY RETURN, WITHIN 15 DAYS, THE SOFTWARE, ALL RELATED DOCUMENTATION AND ACCOMPANYING ITEMS TO THE PLACE OF ACQUISITION FOR A FULL REFUND.**

This is a legal agreement between you and **Creative Technology Ltd.** and its subsidiaries ("Creative"). This Agreement states the terms and conditions upon which Creative offers to license the software sealed in the disk package together with all related documentation and accompanying items including, but not limited to, the executable programs, drivers, libraries and data files associated with such programs (collectively, the "Software").

## LICENSE

### 1. Grant of License

The Software is licensed, not sold, to you for use only under the terms of this Agreement. You own the disk or other media on which the Software is originally or subsequently recorded or fixed; but, as between you and Creative (and, to the extent applicable, its licensors), Creative retains all title to and ownership of the Software and reserves all rights not expressly granted to you.

### 2. For Use on a Single Computer

The Software may be used only on a single computer by a single user at any time. You may transfer the machine-readable portion of the Software from one computer to another computer, provided that (a) the Software (including any portion or copy thereof) is erased from the first computer and (b) there is no possibility that the Software will be used on more than one computer at a time.

### 3. Stand-Alone Basis

You may use the Software only on a stand-alone basis, such that the Software and the functions it provides are accessible only to persons who are physically present at the location of the computer on which the Software is loaded. You may not allow the Software or its functions to be accessed remotely, or transmit all or any portion of the Software through any network or communication line.

### 4. Copyright

The Software is owned by Creative and/or its licensees and is protected by United States copyright laws and international treaty provisions. You may not remove the copyright notice from any copy of the Software or any copy of the written materials, if any, accompanying the Software.

### 5. One Archival Copy

You may make one (1) archival copy of the machine-readable portion of the Software for backup purposes only in support of your use of the Software on a single computer, provided that you reproduce on the copy all copyright and other proprietary rights notices included on the originals of the Software.

### 6. No Merger or Integration

You may not merge any portion of the Software into, or integrate any portion of the Software with, any other program, except to the extent expressly permitted by the laws of the jurisdiction where you are located. Any portion of the Software merged into or integrated with another program, if any, will continue to be subject to the terms and conditions of this Agreement, and you must reproduce on the merged or integrated portion all copyright and other proprietary rights notices included in the originals of the Software.

### 7. Network Version

If you have purchased a "network" version of the Software, this Agreement applies to the installation of the Software on a single "file server". It may not be copied onto multiple systems. Each "node" connected to the "file server" must also have its own license of a "node copy" of the Software, which becomes a license only for that specific "node".

### 8. Transfer of License

You may transfer your license of the Software, provided that (a) you transfer all portions of the Software or copies thereof, (b) you do not retain any portion of the Software or any copy thereof, and (c) the transferee reads and agrees to be bound by the terms and conditions of this Agreement.

### 9. Limitations on Using, Copying, and Modifying the Software

Except to the extent expressly permitted by this Agreement or by the laws of the jurisdiction where you acquired the Software, you may not use, copy or modify the Software. Nor may you sub-license any of your rights under this Agreement.

### 10. Decompiling, Disassembling, or Reverse Engineering

You acknowledge that the Software contains trade secrets and other proprietary information of Creative and its licensors. Except to the extent expressly permitted by this Agreement or by the laws of the jurisdiction where you are located, you may not decompile, disassemble or otherwise reverse engineer the Software, or engage in any other activities to obtain underlying information that is not visible to the user in connection with normal use of the Software.

In particular, you agree not for any purpose to transmit the Software or display the Software's object code on any computer screen or to make any hardcopy memory dumps of the Software's object code. If you believe you require information related to the interoperability of the Software with other programs, you shall not decompile or disassemble the Software to obtain such information, and you agree to request such information from Creative at the

address listed below. Upon receiving such a request, Creative shall determine whether you require such information for a legitimate purpose and, if so, Creative will provide such information to you within a reasonable time and on reasonable conditions.

In any event, you will notify Creative of any information derived from reverse engineering or such other activities, and the results thereof will constitute the confidential information of Creative that may be used only in connection with the Software.

## TERMINATION

The license granted to you is effective until terminated. You may terminate it at any time by returning the Software (including any portions or copies thereof) to Creative. The license will also terminate automatically without any notice from Creative if you fail to comply with any term or condition of this Agreement. You agree upon such termination to return the Software (including any portions or copies thereof) to Creative. Upon termination, Creative may also enforce any rights provided by law. The provisions of this Agreement that protect the proprietary rights of Creative will continue in force after termination.

## LIMITED WARRANTY

Creative warrants, as the sole warranty, that the disks on which the Software is furnished will be free of defects, as set forth in the Warranty Card or printed manual included with the Software. No distributor, dealer or any other entity or person is authorized to expand or alter this warranty or any other provisions of this Agreement. Any representation, other than the warranties set forth in this Agreement, will not bind Creative.

Creative does not warrant that the functions contained in the Software will meet your requirements or that the operation of the Software will be uninterrupted, error-free or free from malicious code. For purposes of this paragraph, "malicious code" means any program code designed to contaminate other computer programs or computer data, consume computer resources, modify, destroy, record, or transmit data, or in some other fashion usurp the normal operation of the computer, computer system, or computer network, including viruses, Trojan horses, droppers, worms, logic bombs, and the like. **EXCEPT AS STATED ABOVE IN THIS AGREEMENT, THE SOFTWARE IS PROVIDED AS-IS WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. CREATIVE IS NOT OBLIGATED TO PROVIDE ANY UPDATES, UPGRADES OR TECHNICAL SUPPORT FOR THE SOFTWARE.**

Further, Creative shall not be liable for the accuracy of any information provided by Creative or third party technical support personnel, or any damages caused, either directly or indirectly, by acts taken or omissions made by you as a result of such technical support.

You assume full responsibility for the selection of the Software to achieve your intended results, and for the installation, use and results obtained from the Software. You also assume the entire risk as to the quality and performance of the Software. Should the Software prove defective, you (and not Creative, or its distributors or dealers) assume the entire cost of all necessary servicing, repair or correction.

This warranty gives you specific legal rights, and you may also have other rights which vary from country/state to country/state. Some countries/states do not allow the exclusion of implied warranties, so the above exclusion may not apply to you. Creative disclaims all warranties of any kind if the Software was customized, repackaged or altered in any way by any third party other than Creative.

**LIMITATION OF REMEDIES AND DAMAGES**  
**THE ONLY REMEDY FOR BREACH OF WARRANTY WILL BE THAT SET FORTH IN THE WARRANTY CARD OR PRINTED MANUAL INCLUDED WITH THE SOFTWARE. IN NO EVENT WILL CREATIVE OR ITS LICENSORS BE LIABLE FOR ANY INDIRECT, INCIDENTAL, SPECIAL OR CONSEQUENTIAL DAMAGES OR FOR ANY LOST PROFITS, LOST SAVINGS, LOST REVENUES OR LOST DATA ARISING FROM OR RELATING TO THE SOFTWARE OR THIS AGREEMENT, EVEN IF CREATIVE OR ITS LICENSORS HAVE BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES. IN NO EVENT WILL CREATIVE'S LIABILITY OR DAMAGES TO YOU OR ANY OTHER PERSON EVER EXCEED THE AMOUNT PAID BY YOU TO USE THE SOFTWARE, REGARDLESS OF THE FORM OF THE CLAIM.**

Some countries/states do not allow the limitation or exclusion of liability for incidental or consequential damages, so the above limitation or exclusion may not apply to you.

#### PRODUCT RETURNS

If you must ship the software to Creative or an authorized Creative distributor or dealer, you must prepay shipping and either insure the software or assume all risk of loss or damage in transit.

#### U.S. GOVERNMENT RESTRICTED RIGHTS

All Software and related documentation are provided with restricted rights. Use, duplication or disclosure by the U.S. Government is subject to restrictions as set forth in subdivision (b)(3)(i) of the Rights in Technical Data and Computer Software Clause at 252.227-7013. If you are sub-licensing or using the Software outside of the United States, you will comply with the applicable local laws of your country, U.S. export control law, and the English version of this Agreement.

#### CONTRACTOR/MANUFACTURER

The Contractor/Manufacturer for the Software is:

**Creative Technology Ltd**  
31, International Business Park  
Singapore 609921

#### GENERAL

This Agreement is binding on you as well as your employees, employers, contractors and agents, and on any successors and assignees. Neither the Software nor any information derived therefrom may be exported except in accordance with the laws of the U.S. or other applicable provisions. This Agreement is governed by the laws of the State of California (except to the extent federal law governs copyrights and federally registered trademarks). This Agreement is the entire agreement between us and supersedes any other understandings or agreements, including, but not limited to, advertising, with respect to the Software. If any provision of this Agreement is deemed invalid or unenforceable by any country or government agency having jurisdiction, that particular provision will be deemed modified to the extent necessary to make the provision valid and enforceable, and the remaining provisions will remain in full force and effect.

For questions concerning this Agreement, please contact Creative at the address stated above. For questions on product or technical matters, contact the Creative technical support center nearest you.

#### ADDENDUM TO THE MICROSOFT SOFTWARE LICENSE AGREEMENT (WINDOWS 95)

**IMPORTANT:** By using the Microsoft software files (the "Microsoft Software") provided with this Addendum, you are agreeing to be bound by the following terms. If you do not agree to be bound by these terms, you may not use the Microsoft Software.

The Microsoft Software is provided for the sole purpose of replacing the corresponding files provided with a previously licensed copy of the Microsoft software product identified above ("ORIGINAL PRODUCT"). Upon installation, the Microsoft Software files become part of the ORIGINAL PRODUCT and are subject to the same warranty and license terms and conditions as the ORIGINAL PRODUCT. If you do not have a valid license to use the ORIGINAL PRODUCT, you may not use the Microsoft Software. Any other use of the Microsoft Software is prohibited.

#### SPECIAL PROVISIONS APPLICABLE TO THE EUROPEAN UNION

IF YOU ACQUIRED THE SOFTWARE IN THE EUROPEAN UNION (EU), THE FOLLOWING PROVISIONS ALSO APPLY TO YOU. IF THERE IS ANY INCONSISTENCY BETWEEN THE TERMS OF THE SOFTWARE LICENSE AGREEMENT SET OUT EARLIER AND IN THE FOLLOWING PROVISIONS, THE FOLLOWING PROVISIONS SHALL TAKE PRECEDENCE.

#### DECOMPILATION

You agree not for any purpose to transmit the Software or display the Software's object code on any computer screen or to make any hard copy memory dumps of the Software's object code. If you believe you require information related to the interoperability of the Software with other programs, you shall not decompile or disassemble the Software to obtain such information, and you agree to request such information from Creative at the address listed earlier. Upon receiving such a request, Creative shall determine whether you require such information for a legitimate purpose and, if so, Creative will provide such information to you within a reasonable time and on reasonable conditions.

**LIMITED WARRANTY**  
**EXCEPT AS STATED EARLIER IN THIS AGREEMENT, AND AS PROVIDED UNDER THE HEADING "STATUTORY RIGHTS", THE SOFTWARE IS PROVIDED AS-IS WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTIES OR CONDITIONS OF MERCHANTABILITY, QUALITY AND FITNESS FOR A PARTICULAR PURPOSE.**

**LIMITATION OF REMEDY AND DAMAGES**  
**THE LIMITATIONS OF REMEDIES AND DAMAGES IN THE SOFTWARE LICENSE AGREEMENT SHALL NOT APPLY TO PERSONAL INJURY (INCLUDING DEATH) TO ANY PERSON CAUSED BY CREATIVE'S NEGLIGENCE AND ARE SUBJECT TO THE PROVISION SET OUT UNDER THE HEADING "STATUTORY RIGHTS".**

#### STATUTORY RIGHTS

Irish law provides that certain conditions and warranties may be implied in contracts for the sale of goods and in contracts for the supply of services. Such conditions and warranties are hereby excluded, to the extent such exclusion, in the context of this transaction, is lawful under Irish law. Conversely, such conditions and warranties, insofar as they may not be lawfully excluded, shall apply. Accordingly nothing in this Agreement shall prejudice any rights that you may enjoy by virtue of Sections 12, 13, 14 or 15 of the Irish Sale of Goods Act 1893 (as amended).

#### GENERAL

This Agreement is governed by the laws of the Republic of Ireland. The local language version of this agreement shall apply to Software acquired in the EU. This Agreement is the entire agreement between us, and you agree that Creative will not have any liability for any untrue statement or representation made by it, its agents or any one else (whether innocently or negligently) upon which you relied upon entering this Agreement, unless such untrue statement or representation was made fraudulently.

**CAUTION:** This device is intended to be installed by the user in a CSA/TUV/UL certified/listed IBM AT or compatible personal computers in the manufacturer's defined operator access area. Check the equipment operating/installation manual and/or with the equipment manufacturer to verify/confirm if your equipment is suitable for user-installed application cards.

**ATTENTION:** Ce carte est destiné à être installé par l'utilisateur, dans un ordinateur compatible certifié CSA/TUV/UL ou listé IBM AT, à l'intérieur de la zone définie par le fabricant. Consulter le mode d'emploi ou le fabricant de l'appareil pour vérifier ou confirmer si l'utilisateur peut y installer lui-même des cartes périphériques.

## 1R1LFH IRU WKH 86\$

**FCC Part 15:** This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, this notice is not a guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try one or more of the following measures:

- ☐ Reorient or relocate the receiving antenna.
- ☐ Increase the distance between the equipment and receiver.
- ☐ Connect the equipment to an outlet on a circuit different from that to which the receiver is connected.
- ☐ Consult the dealer or an experienced radio/TV technician.

**CAUTION:** To comply with the limits for the Class B digital device, pursuant to Part 15 of the FCC Rules, this device must be installed in computer equipment certified to comply with the Class B limits.

All cables used to connect the computer and peripherals must be shielded and grounded. Operation with non-certified computers or non-shielded cables may result in interference to radio or television reception.

## ORGU1FD111RQV

Any changes or modifications not expressly approved by the grantee of this device could void the user's authority to operate the device.

## 6DIHW ,QIRUPD111RQ

## 1R1LFH IRU &DQDGD

This apparatus complies with the Class "B" limits for radio interference as specified in the Canadian Department of Communications Radio Interference Regulations.

Cet appareil est conforme aux normes de CLASSE "B" d'interférence radio tel que spécifié par le Ministère Canadien des Communications dans les règlements d'interférence radio.

## &RPS11DQFH

This product conforms to the following Council Directive:

- ☐ Directive 89/336/EEC, 92/31/EEC (EMC)

## ' HFOD11D111RQ RI &RQIRUP111W

According to the FCC96 208 and ET95-19

Name: **Creative Labs Inc.**

Address: **1901 McCarthy Boulevard  
Milpitas, CA. 95035  
United States  
Tel: (408) 428-6600**

declares under its sole responsibility that the product

Trade Name: **Creative Labs**

Model Number: **CT4670 / CT4690**

**has been tested according to the FCC / CISPR22/85 requirement for Class B devices and found compliant with the following standards:**

EMI/EMC: ANSI C63.4 1992, FCC Part 15 Subpart B

This device complies with part 15 of the FCC Rules.

Operation is subject to the following two conditions:

1. This device may not cause harmful interference, and
2. This device must accept any interference received, including interference that may cause undesirable operation.

Ce matériel est conforme à la section 15 des règles FCC.


Son Fonctionnement est soumis aux deux conditions suivantes:

1. Le matériel ne peut être source D'interférences et
2. Doit accepter toutes les interférences reçues, Y compris celles pouvant provoquer un fonctionnement indésirable.

Supplementary:

CT4690 is an optional add-on board for CT4670. It's providing In/Out to any external device.

**Compliance Manager  
Creative Labs, Inc.  
August 14, 1998**

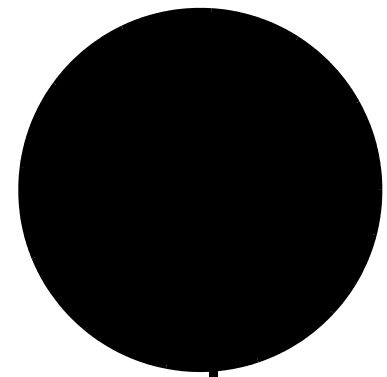

## ,QWJRGXFILRQ

Sound Blaster Live! Value Benefits .....	ix
System Requirements .....	xi
Before You Begin .....	xi
Getting More Information .....	xi
Document Conventions .....	xii

## . QRZIQJ DQG ,QVMDQIQJ <RXU &DUG

On the Audio Card .....	1-2
Installing the Card and Related Peripherals .....	1-3
Positioning Your Speakers .....	1-5
Connecting Creative PC-DVD .....	1-6

## ,QVMDQIQJ 6RIWZDUH IQ : IQGRZV

Setting Up the Audio Drivers .....	2-1
Installing the Applications .....	2-4
Using Sound Blaster Live! Value .....	2-5
Configuring Your Speakers .....	2-6
Experiencing Sound Blaster Live! Value .....	2-6
Uninstalling the Applications .....	2-7
Reinstalling the Audio Drivers From the Installation Disc .....	2-8
Playing Legacy Games .....	2-8

## QWMDQJ 6RWZDUH IQ : IQGRZV 17

Installing the Software .....	3-1
Setting Up Joystick Drivers in Windows NT 4.0.....	3-2
Experiencing Sound Blaster Live! Value .....	3-2
Reinstalling the Audio Drivers From the Installation Disc.....	3-3
Removing Unused Sound Blaster Drivers .....	3-3

## 8VQJ 6RXQG %DVWU /LYH 9DOXH

SB Live! Tour .....	4-2
Sound Blaster Live! Experience.....	4-2
Creative Launcher .....	4-2
AudioHQ .....	4-3
SoundFont Control.....	4-4
Device Controls.....	4-7
Creative Keyboard .....	4-8
Sound Graph .....	4-10
Creative Mixer.....	4-11
Speaker Control .....	4-12
Environmental Audio Control.....	4-14
Soundo'LE.....	4-14
Wave Studio.....	4-14
Creative Keytar.....	4-15
Creative Rhythmania.....	4-16
Creative PlayCenter.....	4-17

## \$GGWLRQD 6RXQG %DVWU /LYH 9DOXH \$SSQFDMRQV

Prody Parrot.....	5-1
Unreal.....	5-4

## \$ \* HQHUD 6SHFUDMRQV

Features.....	A-1
---------------	-----


	Connectivity .....	A-2
%	6% (PX0D11RQ 1Q O6 ' 26 : 1QGRZV	
	Background .....	B-1
	Understanding the Installation Program in Windows 95/98.....	B-2
	The AUTOEXEC.BAT File Settings.....	B-2
	The CONFIG.SYS File Settings.....	B-3
	Understanding the System Resource Settings .....	B-4
	Input/Output (I/O) Addresses.....	B-5
	Interrupt Request (IRQ) Line .....	B-5
	Direct Memory Access (DMA) Channel .....	B-6
	Understanding the Environment Variables .....	B-6
	CTSYN Environment Variable .....	B-6
	BLASTER Environment Variable .....	B-6
	Determining Resources.....	B-7
	Selecting the Best Audio Options in a Game .....	B-8
	Music Options.....	B-9
	Digital Audio Options .....	B-9
	MS-DOS Mode Utilities.....	B-9
	SBECFG.EXE .....	B-9
	SBEMIXER.EXE.....	B-9
	SBESET.EXE .....	B-11
	SBEGO.EXE .....	B-11
&	&KDQJ1QJ \$XG1R &DIG 6H111QJ	
	Enabling/Disabling Gameport Joystick Interface.....	C-1
	Enabling/Disabling Other Features.....	C-2
'	71RXE0HVKRR11QJ	
	Problems Installing Software .....	D-1
	Problems With Sound .....	D-2

Insufficient SoundFont Cache .....	D-4
Problems With Joystick .....	D-5
Resolving I/O Conflicts .....	D-5
Problems in Windows NT 4.0 .....	D-6
Problems with Encore DVD Player .....	D-7



# Introduction

---

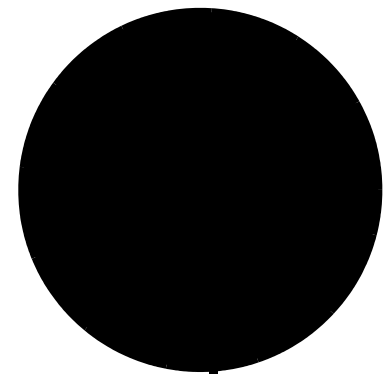

With the Sound Blaster Live!— the most powerful sound card ever—taking the industry by storm, Creative now introduces Sound Blaster Live! Value for the mainstream market. The casual PC entertainment enthusiasts and even the non-gaming music lovers can now enjoy the wonders of Sound Blaster Live!'s Environmental Audio. Sound Blaster Live! Value offers the same quality and performance of the highly successful Sound Blaster Live!—without the extended Digital I/O card—with features and performances surpassing professional audio equipment. Sound Blaster Live! Value incorporates the superior surround-sound rendering of Environmental Audio™ to create sound so real it has to be Live! You'll enjoy music productions so dynamic like you're right in the middle of an orchestra. The Sound Blaster Live! Value hardware-accelerated Environmental Audio Extensions™ (EAX™), supporting new titles, offers an experience that goes beyond 3D Audio. Add the ability to enhance all your existing games and legacy audio with true digital processing and it will blow your home theater away!

## Sound Blaster Live! Value Benefits

Hollywood-Quality Audio Re-creation

With professional-quality synthesizers and digital I/O, Sound Blaster Live! Value provides audio fidelity that rivals movie theaters with digital sound. Excellent overall audio fidelity is achieved with an average Noise Floor of -120 dB, a level unheard of in the PC industry.

Powerful Audio Processing Engine	The EMU10K1™ audio processor is the most powerful integrated music, audio and effects engine available. Every signal is processed at 32-bit, 192 dB, 48 kHz using 8-point interpolation to smoothen the sound, instantly improving any audio source. Apply real-time effects including Reverb, Chorus, Flanger, Echo, and Pitch Shifter, that rival stand-alone expensive professional effects processors.
Environmental Audio™ Enhances Existing Contents	Experience depth and realism beyond existing 3D audio. Apply preset environments such as <i>hall</i> , <i>cave</i> or <i>underwater</i> that can be applied to your existing games and applications for incredibly true sound. Game environmental settings also make your existing games come “alive” instantaneously.
Multiple Speaker Output	Produce surround-sound audio on your PC with built-in support for two or four analog speakers.
256-Voice Music Synthesis	256-voice capability goes beyond the quality and performance available in most professional music equipment. Using host memory, you can choose from E-mu's 2 MB, 4 MB, or 8 MB SoundFont® professional-quality sample banks for music reproduction. Or use up to 32 MB of memory for amazing SoundFont music fidelity. All these without sacrificing on CPU utilization.
Sound Blaster PCI Standard	You can be assured of near-perfect Sound Blaster compatibility on the PCI bus while enjoying all its benefits. It works with the existing MS-DOS®-based and Windows®-based titles, completely replacing your existing ISA sound card.
Environmental Audio Extensions™ (EAX™)/Broad Driver Support	Environment Audio Extensions is an open standard that allows the broadest support from software developers. Supports Microsoft DirectSound®, DirectSound3D, and derivative technologies. Advanced architecture is ready for the coming generations of WDM, DLS, and IEEE 1394/Firewire devices.
Sound Blaster Live! Website <a href="http://www.sblive.com">www.sblive.com</a>	Exciting new applications and developer support will be available on the Sound Blaster Live! website. For instant access to the latest applications, enhancements, drivers, and more, visit <a href="http://www.sblive.com">www.sblive.com</a> .

## System Requirements

For Creative software, your card requires at least:

- ☐ Pentium® class 133 MHz or equivalent processor
- ☐ Windows 95, 98 or Windows NT 4.0
- ☐ 16 MB RAM for Windows 95/98 (32 MB RAM recommended),  
32 MB RAM for Windows NT 4.0
- ☐ 72 MB of free hard disk space for Windows 95/98;  
55 MB for Windows NT 4.0
- ☐ One free PCI bus slot
- ☐ Powered speakers or external amplifier (recommended: Cambridge SoundWorks speakers)

Sound Blaster Live! Value gives you an estimate of the hard disk space required when you select it on the installation screen. Some applications may require a system configuration greater than that listed above. Refer to online documentation (README or HLP files) or specifications on the outer box for details.

## Before You Begin

The README file on the installation CD-ROM contains information and changes not available at the time of printing. Read the file before you continue.

## Getting More Information

See the online *User's Guide* for MIDI specifications and connector pin assignments, as well as instructions on using the various applications in your audio package.

## Document Conventions

The following typographical conventions are used throughout this document:

**bold**

Text that must be entered exactly as it appears.

*italic*

Title of a book or a placeholder, which represents the information you must provide.

UPPERCASE Directory name, file name, or acronym.



The notepad icon indicates information that is of particular importance and should be considered before continuing.



The alarm clock designates a caution or warning that can help you avoid situations involving risk.

# Knowing and Installing Your Card

---

This chapter is organized as follows:

- ❑ On the Audio Card
- ❑ Installing the Card and Related Peripherals
- ❑ Positioning Your Speakers
- ❑ Connecting Creative PC-DVD

## On the Audio Card



Jacks are one-hole connecting interfaces whereas connectors consist of many pairs of pins. Some connectors here may not be available on your card. Refer to the online *User's Guide*, "Hardware Information", for details on connector pin assignments.



Line Out and Rear Out jacks can be used simultaneously to power 4.1 channel speaker systems, for example, PCWorks™ FourPointSurround™ from Cambridge SoundWorks.

Your audio card has these jacks and connectors which allow you to attach other devices:

### CD Audio connector

Connects to the Analog Audio output on a CD-ROM or DVD-ROM drive using a CD audio cable.

### Telephone Answering Device connector

Provides a mono connection from a standard voice modem, and transmits microphone signals to the modem.

### Line In jack (blue)

Connects to external devices (such as cassette, DAT, or MiniDisc player) for playback or recording.

### Microphone In jack (red)

Connects to an external microphone for voice input.

### Line Out jack (green)

Connects to powered speakers or an external amplifier for audio output. Also supports headphones.

### Rear Out jack (black)

Connects to powered speakers or an external amplifier for audio output.

### Joystick/MIDI connector

Connects to a joystick or a MIDI device. You can buy an optional MIDI kit that allows you to plug in the joystick and MIDI device simultaneously.

### Modem connector

Connects to any modem card that is specifically designed for this interface.

### AUX connector

Connects to internal audio sources such as TV Tuner, MPEG, or other similar cards.

### PC Speaker connector

Connects to your motherboard's speaker connector (refer to "Redirecting PC Sounds to External Speakers" in the online *User's Guide* for details).

### CD SPDIF connector

Connects to the SPDIF (Digital Audio) output (where available) on a CD-ROM or DVD-ROM drive.

### SPDIF Extension (SPDIF Digital I/O) connector

Connects to a digital I/O device. See pin assignment below.

### 12-pin SPDIF EXT connector pin assignments

Pin	Name	Description
1	SPDIFO#0	SPDIF Out signal
2	GND	Ground
3	KEY	
4	VCC	Power
5	GND	Ground
6	SPDIF_IN	SPDIF In signal
7	NC	Not connected
8	NC	Not connected
9	SPDIFO#1	SPDIF Out signal
10	GND	Ground
11	SPDIFO#2	SPDIF Out signal
12	SPDIFO#3	SPDIF Out signal

Figure 1-1: Jacks and connectors on the Sound Blaster Live! Value card.

## Installing the Card and Related Peripherals



Do not force the audio card into the slot. If it does not fit properly, gently remove it and try again.



The joystick connector on your audio card is identical to that on a standard PC game control adapter or the game I/O connector. You can connect any analog joystick with a 15-pin D-shell connector or any device compatible with the standard PC joystick. To use two joysticks, you need a Y-cable splitter.

1. Switch off your system and all peripheral devices.
2. Touch a metal plate on your system to ground yourself and to discharge any static electricity, and then unplug the power cord from the wall outlet.
3. Remove the cover from your system.
4. Remove the metal plate from an unused PCI expansion slot in your system and put the screw aside, to be used later.
5. Align the audio card with the vacant PCI expansion slot. Press the card gently and evenly into the slot as shown. Ensure that the card sits firmly inside the PCI expansion slot.
6. Secure the card to the expansion slot with a screw.
7. There are several ways to configure your speaker system for the best Environmental Audio experience; see the *Speaker Configuration Guide* leaflet. To learn how to connect the rest of the devices, see Figure 1-3.
8. Replace the cover onto your system.
9. Plug the power cord back into the wall outlet, and switch on the system.

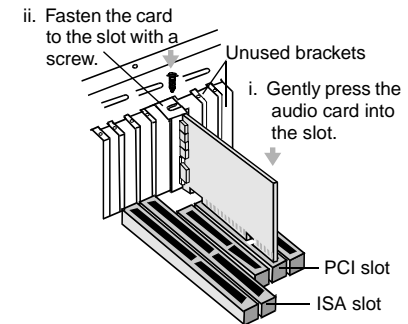


Figure 1-2: Securing the audio card to the PCI expansion slot.



❑ If you:

- Are playing games in Windows 95/98 MS-DOS mode (that is, pure DOS mode), *OR*
- Get distorted or no audio at all (Reason: Your CD-ROM or DVD-ROM drive does not fully comply to SPDIF specifications),

you must

1. Connect the CD In connector to the Analog Audio jack of the CD-ROM or DVD-ROM drive.
2. In the Play Control view of SB Live! Mixer, mute the CD Audio device and unmute the CD Digital device.

- ❑ If you connect to the Digital Audio and Analog Audio jacks of the *same* CD-ROM or DVD-ROM drive, make sure that in the Play Control view of SB Live! Mixer unmute only one or the other of CD Audio or CD Digital but not both.


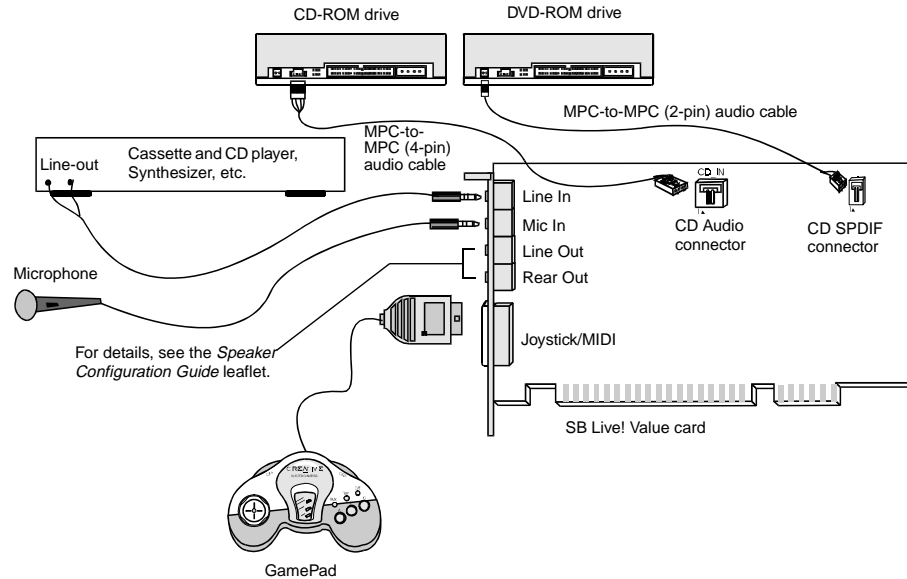


Figure 1-3: Connecting other devices.



## Positioning Your Speakers

If you are using four speakers, place them such that they form the corners of a square with you exactly in the center (as in Figure 1-4) and that they are angled toward you. Make sure the computer monitor is not blocking the path of your front speakers. You may want to adjust the relative positions of the speakers until you get the audio experience you like best. If you have a subwoofer, place the unit in a corner of the room for the best bass experience.

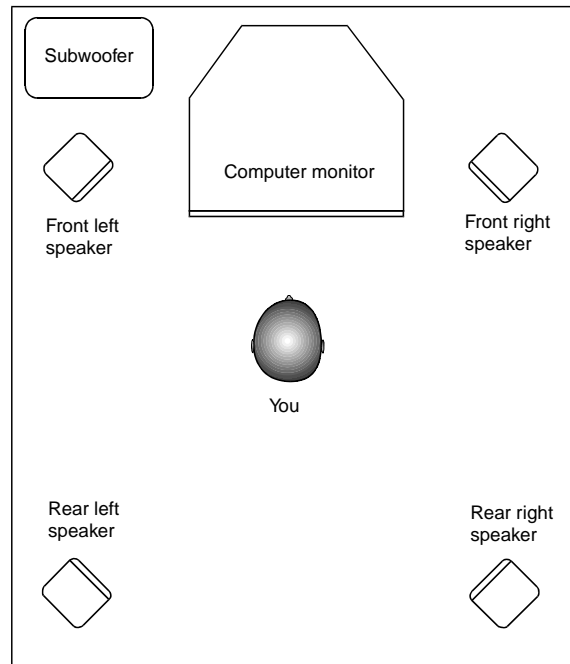

*Figure 1-4: Recommended speaker positions for the 4-speaker configuration.*

## Connecting Creative PC-DVD

When you are playing your DVD movies or games:

- ❑ If your Encore Dxr2 or MPEG2 decoder card is connected to an external Dolby Digital (AC-3) decoder such as Desktop Theater 5.1, either:
  - Disconnect the Sound Blaster Live! card's Aux In connector from the decoder card's Audio Out connector (Highly recommended),  
*OR*
  - Mute the Aux Input in the SB Live! Mixer's Play Control view.
- ❑ If your decoder card is *not* connected to an external Dolby Digital (AC-3) decoder, it is recommended that you:
  1. Connect the Sound Blaster Live! card's Aux In connector to the decoder card's Audio Out connector.
  2. Select (that is, unmute) the Aux Input in the SB Live! Mixer's Play Control view.
- ❑ If you:
  - Get distorted or no audio at all (Reason: Your CD-ROM or DVD-ROM drive does not fully comply to SPDIF specifications),  
*OR*
  - Are playing games in Windows 95/98 MS-DOS mode (that is, pure DOS mode), do the following:
    1. Connect the CD In connector to the Analog Audio jack of the CD-ROM or DVD-ROM drive.
    2. In the Play Control view of SB Live! Mixer, unmute the CD Audio device and mute the CD Digital device.
- ❑ If you connect to the Digital Audio and Analog Audio jacks of the *same* CD-ROM or DVD-ROM drive, make sure that in the Play Control view of SB Live! Mixer, unmute only one or the other of CD Audio or CD Digital but not both.

To open the mixer, bring your pointer to the top of the screen to display Creative Launcher, click the AudioHQ tab, and then click the Mixer icon.

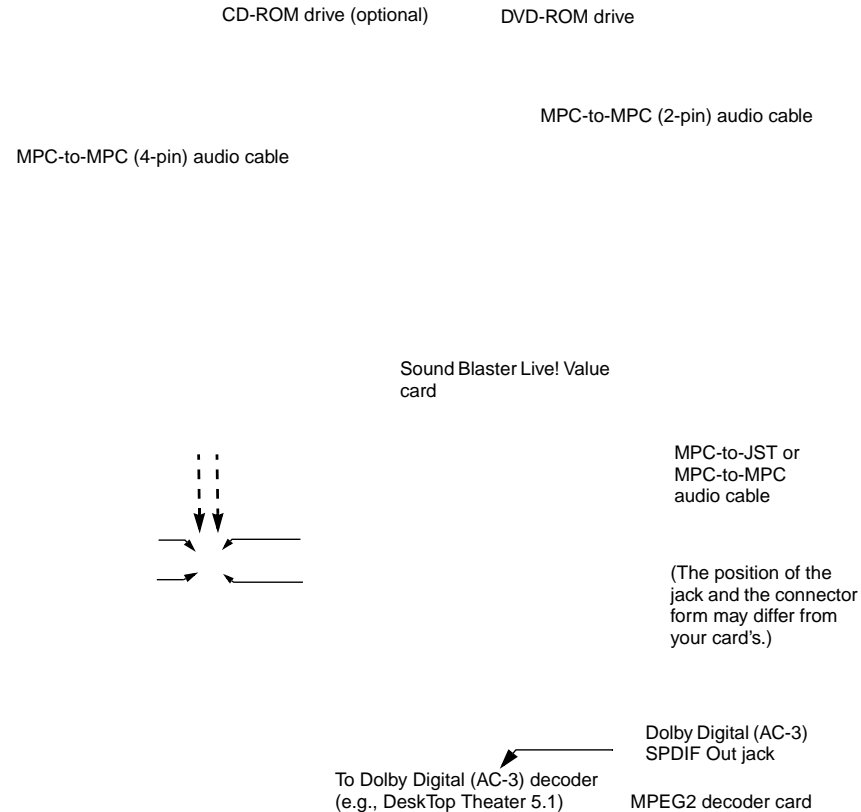


Figure 1-5: Connecting Creative PC-DVD.

## Installing Software in Windows 95/98

---

This chapter shows you how to install the audio software in Windows 95/98 after installing your card. It consists of the following sections:

- ☐ Setting Up the Audio Drivers
- ☐ Installing the Applications
- ☐ Using Sound Blaster Live! Value
- ☐ Configuring Your Speakers
- ☐ Experiencing Sound Blaster Live! Value
- ☐ Uninstalling the Applications
- ☐ Reinstalling the Audio Drivers From the Installation Disc
- ☐ Playing Legacy Games

### Setting Up the Audio Drivers

You need device drivers to control the components on your audio card. After you have installed the card and switched on your system, Windows 95/98 automatically detects the components, and then either installs the drivers automatically or prompts you for the drivers. You may encounter the following messages, which may not be in the sequence shown.

- ❑ If a message similar to Figure 2-1 appears, just take note of it and wait for the next message.

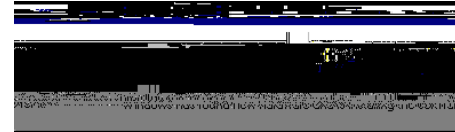


Figure 2-1: Message box indicating the detection of a device.

- ❑ If a dialog box similar to Figure 2-2 appears, click the Driver From Disk Provided By Hardware Manufacturer option, and then click the OK button.
- ❑ If the **Install From Disk** dialog box or a dialog box similar to Figure 2-3 appears:
  1. Insert the installation disc into your CD-ROM drive and select the drive.
  2. If there is a Specify A Location check box, make sure it is selected and clear the other check boxes.
  3. Click the Browse button and select the folder **AUDIO\Language\WIN95DRV** where *Language* is the language of the software that you want to install.


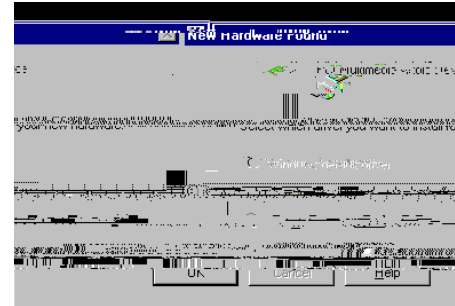


Figure 2-2: Driver installation dialog box where the Windows default driver option is not available.

4. Click the OK button.

The required files are copied to your hard disk.

- ❑ If a dialog box similar to Figure 2-4 appears:

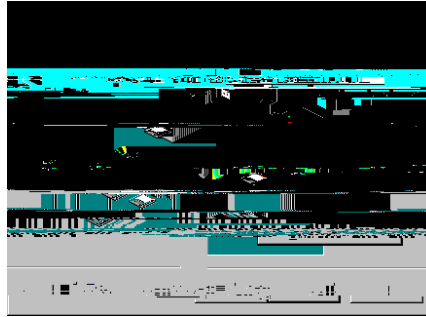


*Figure 2-4: Update Device Driver Wizard dialog box when driver cannot be found.*



*Figure 2-3: Windows 98 Add New Hardware Wizard dialog box.*

1. Click the Other Locations button.
2. At the Select Other Locations dialog box, click the Browse button and select the folder **AUDIO\Language\WIN95DRV** where *Language* is the language of the software that you want to install.
3. Click the OK button, and then click the Finish button.  
Some of the required files are copied to your hard disk. However, an error message stating that a file (2GMGSMT.SF2 or otherwise) cannot be found also appears.
4. Click the OK button.
5. At the Copying Files dialog box, click the Browse button and select the folder **AUDIO\Language\WIN95DRV** where *Language* is the language of the software that you want to install.
6. Click the Open button, and then click the OK button twice.  
The file is copied to your hard disk.

- ❑ If a dialog box similar to Figure 2-5 appears, click the Next button, and follow the instructions on the screen to complete the installation of the driver.
- ❑ If a Version Conflict message box appears about VJOYD.VXD and MSJSTICK.DRV, click the Yes button to keep the files.



*Figure 2-5: Update Device Driver Wizard dialog box at start of installation.*

## Installing the Applications



It is highly recommended that you install SB Live! Experience. It appears as a check box on the AutoPlay screen.


1. If your installation disc is already in your CD-ROM drive, eject the disc and insert it again.  
The disc supports Windows AutoPlay mode and starts running automatically. If not, see “Problems Installing Software” on page D-1.
2. Follow the instructions on the screen to complete the installation

## Using Sound Blaster Live! Value

Every bundled application provides online help to guide you along when you use it.

For the latest updates and drivers, further information, value-added tips, tricks and plug-ins, check the SB Live! owners' website frequently at **<http://www.sblive.com>**


A fast way of getting to the website is to click the right-most button (the Environmental Audio icon) on Creative Launcher.



*Figure 2-6: Creative Launcher.*

***Creative Launcher*** is a one-stop shortcut to quickly start your applications and get to the Creative and the SB Live! owners' websites. To display Launcher, bring your pointer to the top of the screen.

***Creative PlayCenter*** allows you to play most types of media—multimedia files (MIDI, Wave, etc.), audio CDs, and Video CDs—using a single player! There is no need to use different players to play different media types. Just insert or select your media and PlayCenter will do the rest.

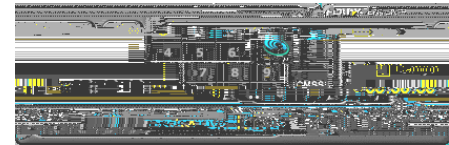

*Figure 2-7: Creative PlayCenter.*

To run PlayCenter, bring your pointer to the top of the screen to display Creative Launcher, click the Programs tab, and then click the PlayCenter icon.



## Configuring Your Speakers



If you have a 4-speaker configuration (2 in the front, 2 in the rear), and there is no sound coming from the rear speakers, open the Sound Blaster Live! Speaker applet to change to the correct speaker output setting.

1. Bring your pointer to the top of the screen to display Creative Launcher, click the AudioHQ tab, and then click the Speaker icon.  
The Speaker dialog box appears.
2. On the Configuration tabbed page, make sure that the value in the Output box corresponds to the number of speakers you are using. For example, if you are using two pairs of speakers, select the “4 Speakers” option; if you leave the Output value as “2 Speakers”, there will be no sound from your rear speakers.
3. Using Creative PlayCenter or Windows Media Player, open a Wave file in your computer and play it. In the Speaker dialog box, drag the Wave source icon from the Panning Source box to each speaker in the Preview box in turn.  
You should hear the selected sound being played. If you do not, see “Problems With Sound” on page D-2.

## Experiencing Sound Blaster Live! Value

Congratulations! You have successfully installed Sound Blaster Live! Value. To enhance your experience, it is highly recommended that you run these programs:

### ***SB Live! Experience***

Demonstrates the many wonderful experiences Sound Blaster Live! can give you.

- To run SB Live! Experience, bring your pointer to the top of the screen to display Creative Launcher, click the Sound Blaster Live! Value tab, and then click the SB Live! Experience icon.

### ***SB Live! Tour***

Easy-to-follow ScreenCam™ movies to show you how to use Sound Blaster Live! and get the most out of it.

- To run SB Live! Tour, insert the SB Live! Value Installation and Tour CD into your CD-ROM drive. At the AutoPlay screen, click the SB Live! Tour button.

## Uninstalling the Applications



Quit the audio card's applications before uninstalling. Applications that are still running during uninstallation will not be uninstalled.

The Windows Uninstall feature allows you to cleanly remove applications and to reinstall them in order to correct problems, change configurations, or make version upgrades.

*To uninstall the applications:*

1. Click the Start button, point to Settings, and then click Control Panel.
2. Double-click the Add/Remove Programs icon.
3. In the Add/Remove Programs Properties dialog box, select the target programs including Sound Blaster Live! Value, and then click the Add/Remove button.
4. Follow the instructions on the screen to uninstall.



Some applications may share files with other Windows applications. If so, the uninstallation program will prompt you when it tries to delete these files. Do not delete the files unless you are sure that you do not need to use them.

## Reinstalling the Audio Drivers From the Installation Disc

You may want to reinstall the audio drivers if you think they have been corrupted.

To do so:

1. Insert the installation disc into your CD-ROM drive.
2. Run the UPDDRV95.EXE program from the **AUDIO\Language\WIN95DRV** folder of your CD-ROM drive, where *Language* is the language of the software that you want to install. The updating process may take a while. When the progress indicator box disappears, the update is complete.

## Playing Legacy Games

For more information, see Appendix B, “SB Emulation in MS-DOS/ Windows 95/98”.

## Installing Software in Windows NT 4.0

---



You cannot install more than one Sound Blaster audio card of the same type on your computer.

### Installing the Software

This chapter shows you how to install the audio software in Windows NT 4.0 after installing your card. It consists of the following sections:

- ☐ Installing the Software
- ☐ Setting Up Joystick Drivers in Windows NT 4.0
- ☐ See “Using Sound Blaster Live! Value” on page 2-5 and “Configuring Your Speakers” on page 2-6. They also apply in Windows NT 4.0.
- ☐ Experiencing Sound Blaster Live! Value
- ☐ Reinstalling the Audio Drivers From the Installation Disc
- ☐ Removing Unused Sound Blaster Drivers

The software installation in NT 4.0 includes the installation of audio drivers.

1. Insert the installation disc into your CD-ROM drive.  
The AutoPlay screen appears.
2. Follow the instructions on the screen to complete the installation.

## Setting Up Joystick Drivers in Windows NT 4.0

1. Log on to your computer as Administrator.
2. Click the Start button, point to Settings, and then click Control Panel.
3. Double-click the Multimedia icon, click the Devices tab, and then click the Add button.
4. In the List of Drivers box of the Add dialog box, select Unlisted Or Updated Driver, and then click the OK button.
5. Insert the Windows NT 4.0 CD-ROM which contains the JOYSTICK.SYS file into the CD-ROM drive.
6. In the Install Driver dialog box, type  
**E:\DRVLIB\MULTIMED\JOYSTICK\X86**  
if E:\ is the CD-ROM drive letter, and then click the OK button.
7. In the Add Unlisted Or Updated Driver dialog box, click Analog Joystick Driver, and then click the OK button.
8. In the Microsoft Joystick Configuration dialog box, click the OK button.
9. Restart your computer when prompted.

See “Using Sound Blaster Live! Value” on page 2-5 and “Configuring Your Speakers” on page 2-6. They also apply in Windows NT 4.0.

## Experiencing Sound Blaster Live! Value

Congratulations! You have successfully installed Sound Blaster Live! Value. It is recommended that you run SB Live! Tour to learn how to use and get the most out of Sound Blaster Live! Value.

To run SB Live! Tour

1. Insert the SB Live! Value Installation and Tour CD into your CD-ROM drive.
2. At the AutoPlay screen, click the SB Live! Tour button.

## Reinstalling the Audio Drivers From the Installation Disc

You may want to reinstall the audio drivers if you think they are corrupted.

To do so:

1. Insert the installation disc into your CD-ROM drive.
2. Run the UPDPCINT.EXE program from the **AUDIO\Language\NT4DRV** folder of your CD-ROM drive, where *Language* is the language of the software that you want to install.
3. Restart your computer when prompted. You may be prompted to restart more than once.
4. If a Windows NT 4.0 Service Control Manager error message appears, see “Resolving I/O Conflicts” on page D-5.

## Removing Unused Sound Blaster Drivers

You may want to remove unused Sound Blaster ISA and PCI audio drivers after you have removed the cards from your computer. To remove the drivers, use the procedure in the previous section, “Reinstalling the Audio Drivers From the Installation Disc”.

## Using Sound Blaster Live! Value

---

Sound Blaster Live! Value is supported by a full range of applications to help you get the absolute most from the audio card. The software most important to the operation of your audio card is the Sound Blaster Live! Value group.

- ☐ SB Live! Tour
- ☐ Sound Blaster Live! Experience
- ☐ Creative Launcher
- ☐ AudioHQ
  - SoundFont Control
  - Device Controls
  - Creative Keyboard
  - Sound Graph
  - Creative Mixer
  - Speaker Control
  - Environmental Audio Control
- ☐ SB Live! Experience
- ☐ SB Live! Tour
- ☐ Soundo'LE
- ☐ Wave Studio

- ☐ Creative Keytar
- ☐ Creative Rhythmania
- ☐ Creative PlayCenter

Additional software included with Sound Blaster Live! Value is described in Chapter 5, “Additional Sound Blaster Live! Value Applications”.

## SB Live! Tour

SB Live! Tour is a multimedia presentation that guides you through the features and utilities included with your audio card. Topics included are Sound Blaster Live!, Music Applications, Games Applications, and Business/Audio Tools.


## Sound Blaster Live! Experience

Sound Blaster Live! Experience presents an interactive introduction to Sound Blaster Live!.

To run SB Live! Experience, display Creative Launcher, click the SB Live! Value tab, and then click the SB Live! Experience icon. On the opening screen, click to select the topic that interests you.

## Creative Launcher

Creative Launcher allows you to organize your desktop and open Creative applications quickly.



Creative Launcher is installed at the top of your screen. If it does not appear, move your mouse pointer to the top of the screen and Launcher should appear. Creative Launcher consists of the system menu icon (the Creative logo at the top left corner), the website icon, group tabs, and the group items. The Environmental Audio icon is on the right.

## Options

*To set the options for the Launcher:*

1. Click the System Menu icon on Launcher, and then click Properties.



The Properties dialog box appears.

2. Select or clear the desired options.
3. Click the OK button to apply the changes to the Launcher.

## Groups

You can place three types of items in Launcher:

- ☐ Subgroups
- ☐ Shortcuts
- ☐ Plug-ins

A *subgroup* is an item within a group that may contain more items.

A *plug-in* is a Creative software module that is integrated into Launcher. Examples are the Volume Control Plugin and the Command Line Plugin.

The installation creates a number of group tabs in Launcher that may contain shortcuts to Creative applications such as PlayCenter and Control Panel. It may also contain shortcuts to other applications for your hardware settings, volume control, help files, or demonstration programs by Creative.

For details on managing groups and items in Launcher, see its online help.

## AudioHQ

AudioHQ can be accessed from Creative Launcher or by opening the Programs menu from the Windows taskbar—click the Start button, point to Programs, point to Creative, point to Sound Blaster Live! Value, and then click AudioHQ. AudioHQ uses the familiar Windows group to display the icon for each utility.



The AudioHQ interface has the standard look and feel of the Windows Control Panel. It contains several control utilities that allow you to view, audition, or set up the audio properties of one or more audio devices on your computer.

## SoundFont Control

Creative SoundFont Control allows you to configure MIDI banks with SoundFont files and instruments, as well as set the caching algorithm and space.

## Configure a MIDI Bank

*To configure a MIDI bank:*

1. In SoundFont Control, click the Configure Bank tab.
2. In the Select Bank list, select the MIDI bank to configure.
3. Click the Load button and load the SoundFont file you want to the MIDI bank. The latest file loaded always appears at the top of the Bank Stack box. The top of the stack is indicated by an arrow.
4. To replace a SoundFont file, click the file and then click the Replace button.  
OR  
Double-click the file, and select the replacement.
5. To clear a bank from the stack, select the bank and then click the Clear button. A variation bank can only be cleared by clearing its main bank.
6. Repeat Steps 3, 4 or 5 as required.



By stacking a SoundFont file instead of replacing one with the other, you may return to the original sounds or use the new selection.

You can “spot” hide particular instruments by loading one or more SoundFont files on top of the original.

When you clear a SoundFont file, you remove the latest configuration of the main bank and any variation banks, including the latest configuration of instruments on the Configure Instrument tabbed page.


## Configure an Instrument



Setting the maximum amount of cache memory for SoundFont files does not mean setting aside or reserving the space. The space can still be used by your computer or other files, if needed.

### *To configure an instrument:*

1. In the SoundFont dialog box, click the Configure Instrument tab.
2. In the Select Bank list, select the bank whose instruments you want to configure. You can select any bank.
3. In the Select Instrument list, select the instrument to configure.  
In the Instrument Stack, you may see an instrument entry although you did not load an instrument on this page. The instrument can be found in a bank loaded on the Configure Bank tabbed page.
4. Click the Load button and load a SoundFont or single-instrument (for example, .WAV) file.  
The last file loaded always appears at the top of the Instrument Stack with an arrow pointing to it.
5. To clear an instrument from the stack, select the instrument and then click the Clear button.
6. For faster processing of SoundFont files, the files are loaded into memory. You need to set the maximum amount of cache memory your SoundFont files can occupy, so that your system performance does not suffer from insufficient memory. You can also set the caching algorithm for a balanced system performance.

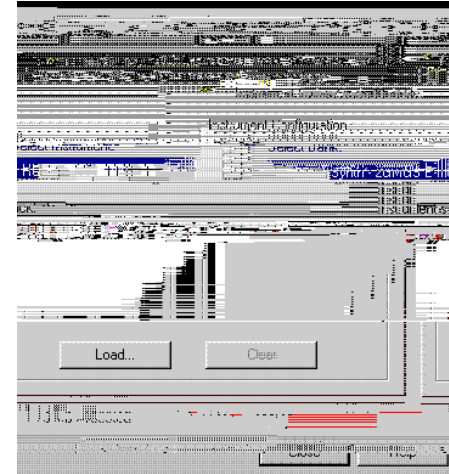


## SoundFont Caching

*To specify the caching algorithm:*

- On the Options tabbed page of the SoundFont Control dialog box, select an algorithm from the SoundFont Cache list.

*To set the amount of cache for SoundFont files:*

- On the Options tabbed page of the SoundFont Control dialog box, move the SoundFont Cache slider to set the amount of cache.



## SoundFont Device

*To change the SoundFont device*

- On the Options tabbed page of the SoundFont dialog box, select the new device from the SoundFont Device list.


## Device Controls

Device Controls allows you to configure for audio playback the audio devices that allow multiple simultaneous Wave playback sessions. For example, you can play five Wave tracks at the same time and enjoy the sounds from them all.

## Playback Sessions

*To set maximum simultaneous Wave playback sessions:*

- On the Wave tabbed page, drag the Maximum Simultaneous Wave Playback slider to the right to set a higher number of Wave playback sessions, or to the left to set a lower number of simultaneous playback sessions.

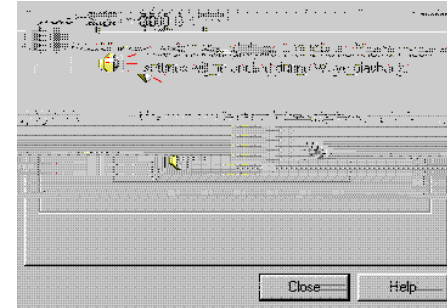


## Wave Blaster Emulation

Currently not supported.

## Sound Device

*To select the sound device to configure:*

- On the Options tabbed page, click the device you want to configure from the Sound Device list.  
The device is immediately selected.

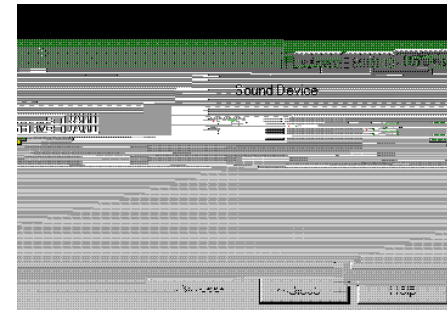

## Creative Keyboard

Creative Keyboard allows you to play musical notes on various instruments much like a composer would play notes on a piano (or other instrument) while creating or arranging music. To edit the sound, use Vienna SoundFont Studio or another sound editor.

## MIDI Input

*To select a MIDI input device:*

1. In the Select MIDI In box in the Options dialog box, click the correct MIDI port.
2. Click the OK button.

You can now use the external MIDI input device to test your sound creation.

You can use external MIDI input devices to audition your MIDI banks and instruments. First, connect a MIDI input device to your audio card and then select that device in Creative Keyboard.



## Test an Instrument

*To test an instrument:*

1. In Creative Keyboard, click the bank and the instrument you want.
2. Click the keys on the keyboard to test the sound. If you have an external MIDI input device, you will probably find it easier to use it instead.

### Tips

- ☐ To select multiple notes to play simultaneously, use your right mouse button to click the keys—which will be marked by black dots.
- ☐ To release the keys, right-click them one by one, *or* click the All Notes Off button for simultaneous release.
- ☐ To slide across the keyboard, drag the mouse.
- ☐ If the playback's sustain is too long, click the All Notes Off button.

*To test instruments with MIDI controllers:*

1. In Creative Keyboard, click the MIDI controller you want to use.
2. Specify a value in the Controller Value box or drag the slider to the value.

3. Click the keys on the keyboard to test the sound. If you have an external MIDI input device, it may be easier to use.

If you do not like the effects on your instrument, click the Reset Controllers button to set the MIDI controllers to their default values.

If the playback is sustained too long, click the All Notes Off button.

*To silence all MIDI sustain sounds:*

- In Creative Keyboard, click the All Notes Off button. All the black points on the keyboard are removed.

## Sound Graph

Creative Sound Graph complements the Record Control view of Creative Mixer by giving a graphical view of the sounds mixed for recording.

There are three display modes:

- ☐ VU Display Mode  
displays the playback signal levels of the left and right channels.
- ☐ Scope Display Mode  
displays the amplitude-to-time relationship between the playback signals.
- ☐ Spectrum Display Mode
  - Logarithmic spectrum displays the normal frequency spectrum of the recording signal in logarithmic form, that is, non-linear. The frequency bands are 250 Hz, 375 Hz, 750 Hz, 1 kHz, 2 kHz, 3 kHz, 4 kHz, 6 kHz, 8 kHz, 10 kHz, 12 kHz, 14 kHz, 16 kHz, and 18 kHz.
  - Fine grain spectrum displays the normal frequency spectrum of the recording signal linearly. Its range is 160 Hz to 12 kHz, with a frequency interval of about 86 Hz, and is very detailed. (This mode is the fine grain version of the spikes spectrum mode.)
  - Spikes spectrum displays the normal frequency spectrum linearly. Its range is 160 Hz to 12 kHz, with a frequency interval of about 86 Hz, and is very detailed. (This mode is the spikes version of the fine grain spectrum mode.)



Double-click the center of Creative Sound Graph to switch to the next display mode.

Click the buttons labeled 1, 2 or 3 on Creative Sound Graph to switch to the Logarithmic Spectrum Mode, Spikes Spectrum Mode, or Fine Grain Spectrum Mode, respectively.

## Creative Mixer

Creative Mixer allows you to control, combine, and manipulate sound from various audio sources. You can control the volume of an audio source while running other Windows applications, and you can select and mix different audio sources during playback and recording.



See the online help file for instructions in

- ☐ Basic tasks
- ☐ Customizing the view
- ☐ Mixing, Recording and Playback, especially on recording from a single source, from multiple sources, "dry" and "wet" recordings. Learn what the "What U Hear" device is all about!

## Speaker Control

Speaker Control allows you to specify your speaker output configuration and the setup of audio source positions for the output. It provides you an intuitive graphical interface to arrange the audio sources about you to get the panning effects you want.



To configure your speakers or headphones



An icon with a down-arrow on the lower-right corner denotes an analog audio source, such as CD Audio, Line In, TAD, Auxiliary, and Microphone. Right-click the icon to select the analog audio device to activate.



If you want to change environmental effects of the sound, use the Environmental Audio Control applet to do so.



To adjust the volume of individual audio sources, go to the Creative Mixer applet.


1. In the Speaker Configuration Output box on the Configuration tabbed page, select the output device you will be using. For best results, select the entry that corresponds to your actual output device.
  - ☐ If you select Headphones, a Headphones icon (representing you) appears at the bottom of the Preview box.
  - ☐ If you select 2 Speakers, a sofa icon (representing you) appears at the bottom of the Preview box, with the two speakers at the (front) upper corners of the box.
  - ☐ If you select 4 Speakers, a sofa icon (representing you) appears in the center of the Preview box, with the four speakers at the corners of the box.
2. For the selected output configuration, the last used setup appears in the Setup box. A setup preset stores the relative positions of audio sources under the selected speaker output configuration. You can have same-named setups across different speaker output configurations the setups can have different settings from one another. Select the setup you want.
3. If you cannot get the setup that you want from the list, create your own setup—use the current setup as the basis for change—or import a setup from a file. To import, click the Import Setup button and then select the .SPS file you want.
  - ☐ For headphones or 2-speaker configuration, you can place audio sources anywhere along the top border of the Preview box. Try dragging the audio source icon and hear the resulting panning effect.
  - ☐ For a 4-speaker configuration, you can place the sources around you as desired. As you place them further away from you, they sound softer.
4. If you used a factory setup as a basis for your own revisions, save the revised settings as a user-defined setup by typing a new name or the name of an existing user-defined setup in the Setup box, and click the Save button. If you want to share with your friends the setup you have created, export the setup (you must first save it) into a file. To do so, click the Export Setup button. You can save using the recommended name or rename as you like.

## Environmental Audio Control

Environmental Audio Control allows you to configure the EMU10K1 effects engine. It allows you to specify to a low level the components that make up the audio elements that in turn make up an environment. An environment is the modeling of a real-world experience. We have provided some entertainment, gaming and concert hall environments to get you started with.

Learn from the online help how to:

- ☐ Configure master effects
  - Add to or remove effects from an environment
  - Specify the effect type
  - Specify the degree or amount of the effect
  - Edit an effect all the way down to its parameters or building blocks
- ☐ Configure source effects, that is, set the amount of the effects to apply on an audio source.
- ☐ Configure MIDI playback effects



## Soundo'LE

Creative Soundo'LE plays and records Wave (.WAV) data, and supports Object Linking and Embedding (OLE) 2.0. In the online help file, learn to:

- ☐ Work with Wave files
- ☐ Embed a Wave file
- ☐ Export an environment to a file
- ☐ Import an environment

## Wave Studio


WaveStudio is a Windows-based application that allows you to perform the following sound editing functions easily:

- ☐ Play, edit, and record 8-bit (tape quality) and 16-bit (CD quality) Wave data. Enhance your Wave data or create unique sounds with various special effects and editing operations such as rap, reverse, echo, mute, pan, cut, copy, and paste.
- ☐ Open and edit several Wave files at the same time.
- ☐ Import and export raw (.RAW) data files.

See the online help file for details.

## Creative Keytar

With Creative Keytar, an easy-to-use and highly interactive edutainment software for beginners, you can turn your multimedia computer into a virtual rhythm guitar system immediately. Click a picture at the top of the screen to choose your favorite guitar. Press a function key (F1, ..., F12) to activate a chord, and you can start strumming or plucking your favorite tune, all in a matter of seconds or minutes.

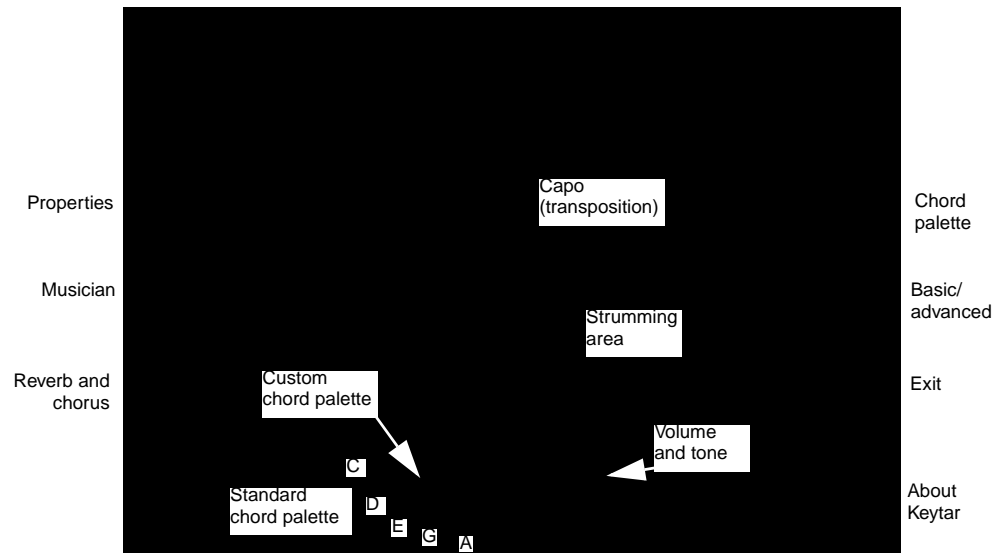


## Creative Rhythmania

You only need to hold the chord with one hand until it is time to change the chord and use the other hand to strum or pluck the strings according to a tune's rhythmic variation. Just rhythm, no need to worry about notes. You only need to know and memorize chord fingerings.

Learn how to use Keytar from its online help.

Creative Rhythmania lets you create a MIDI file, choosing from a professional set of backup rhythms and instruments.



Creative Rhythmania easily allows you to:

- ☐ Perform with auto-accompaniment in Rhythm mode:
  - Four-part Rhythm section
  - Preset backing styles
  - Interactive backing arrangement

- Chord Palette system
  - SoundFont support
- ☐ Choose between two Keyboard types: PC (QWERTY) keyboard or MIDI keyboard connected to your PC.


Rhythmania is essentially pattern-based software:

- ☐ You play a Pattern to provide auto-accompaniment for your melody playing.
- ☐ You create or modify a Pattern by building or changing it Section by Section in Rhythm mode.
- ☐ Then, you combine a Pattern and a melody to create a Sequence in Sequencer mode.

For details on how to use Rhythmania, see its online help.

## Creative PlayCenter

PlayCenter allows you to play most types of media—multimedia files (MIDI, Wave, etc.), audio CDs, and Video CDs—using a single player. Just insert or select your media and PlayCenter does the rest.



To run PlayCenter, bring your pointer to the top of the screen to display Creative Launcher, click the Programs tab, and then click the PlayCenter icon.

For details on how to use PlayCenter, see its online help.


## Additional Sound Blaster Live! Value Applications

---



The applications included with Sound Blaster Live! Value are upgraded from time to time: your set of applications may be slightly different from the ones described here.

### Prody Parrot



Sound Blaster Live! Value can best be appreciated through some of the advanced software that makes maximum use of the audio card's features. To assist you in exploring these features, Creative has assembled an assortment of applications that demonstrate and allow you to explore the limitless potential of Sound Blaster Live! Value.

ACI's Prody Parrot is an intelligent assistant who both serves and entertains you. Prody Parrot inhabits your desktop, swooping from here to there, resting on dialogs and windows. He performs commands and launches applications for you, and also displays his personality by cracking jokes and singing songs.

You can give Prody Parrot commands in five different ways:

- ☐ Voice commands: For example, after you train Prody Parrot, just say "e-mail" to launch your e-mail software.
- ☐ Keyboard commands: For example, after you train Prody Parrot, you can press the L key to insert a letterhead into a Microsoft Word document.
- ☐ Mouse movements: For example, after you train Prody Parrot, write an "I" with your mouse pointer to start your Internet browser.



- ☐ Icon drag-and-drop: For example, after you train Prody Parrot, drag an icon of a guitar onto Prody Parrot to open the CD Player program.
- ☐ Commands List: For example, double-click “hello” in the Commands window to greet Prody Parrot.

Prody Parrot can perform four kinds of actions for you:

- ☐ Run applications for you in Windows.
- ☐ Execute macros for you, consisting of any combination of keyboard and mouse actions.
- ☐ Speak to you with informative messages or entertaining remarks.
- ☐ Exhibit visible behavior in animated action sequences.

Prody Parrot communicates to you in three different ways:

- ☐ By speaking to you, using state-of-the-art speech synthesis.
- ☐ By displaying a text balloon.
- ☐ Through body language, such as closing his eyes to show that he is sleepy, or scratching his head to indicate he did not understand your command.

You can extend Prody Parrot’s skills by training him to understand your commands and to perform a corresponding action when a command is recognized. For your convenience, all the primary commands for many Windows applications are pre-trained for voice and keyboard input.

The Prody Parrot software has the following key features:


Feature	Allows You To
Intelligent Assistant Functionality	Make Prody Parrot your assistant: Tell you the time, navigate the Web for you, start a letter, and open your most-used programs.
Entertaining Animated Character	Have Prody Parrot tell jokes, make comments, ask to be fed, and fly around your desktop.

Feature	Allows You To
Multiple Input and Output Options	Issue commands in five ways—through speech input, keystroke combinations, mouse gestures, double-clicking commands, and dragging icons. Prody Parrot also gives you feedback in three ways: through text, speech, and animation.
Customizable Program Options	Choose when your assistant works and when he plays. Teach Prody Parrot what to say and adjust the quality of his voice.
User-specific Settings	Store the commands and actions that you configured or trained. Users sharing the same computer can have their own individual way of using Prody Parrot.
Pretrained Commands and Actions	Use Prody Parrot for a new application instantly. Prody Parrot extracts and loads menu items from any Windows program and immediately knows how to perform the associated actions.
Trainable Behavior	Teach Prody Parrot to respond to your commands in custom ways, such as running applications, executing macros, speaking or displaying messages, and performing animated action sequences.
Speech Recognition and Speech Synthesis	Use natural, continuous speech to issue commands, without any training. Then, hear Prody Parrot respond in high-quality synthetic speech, with a voice that you can customize to your liking.
Mouse Gesture Recognition	Communicate with Prody Parrot using mouse movements. For example, draw a check-mark to start your Internet browser.

To open Prody Parrot Help or User's Guide:

1. Click the Start button on the Windows taskbar, point to Programs, and then point to Prody Parrot Package.
2. Click either of the following:
  - ☐ Prody Parrot Help
  - ☐ Prody Parrot User's Guide, a PDF file that is opened automatically if you have Acrobat Reader installed.

# Unreal




Unreal™ (Special Edition), the most anticipated game of 1998, is here. With full support for Environmental Audio Extensions, it features a new 3D action game engine based on environments—fully realized worlds more elaborate than any dungeons or cities you have experienced before. Unreal is a *next*-generation game that takes 3D gaming to a new level of realism. Game performance is directly dependent on the amount of memory available in your computer—if you have 32 MB or less, close all other programs before running Unreal; the game is unplayable with less than 16 MB of RAM.

Also, the slower your computer's speed, the slower the game's rendering. For example, a non-MMX 166 MHz PC's game speed is improved by setting the video to 320x240 resolution, if available, and the sound playback to 11050 Hz. Game speed on a PC running at 200 MHz is improved by setting video resolution to 320x240 or 400x300. A Pentium II or AMD K6-2 with 3DNow! furnishes very nice rendering speed and consistent frame rate in 32-bit color and video resolution of 512x384; try the audio at 44 kHz.

Hard disk space is another primary requirement for successful game-play with Unreal. The game runs best with 150 MB of free space; for the editor, you may need to have 300 MB available.

Although you can rely solely on your keyboard to move around in and interact in Unreal's 3D universe, using both the keyboard and mouse simultaneously gives you much more fluid and responsive control. Use the mouse to control your rotational movement and aiming to achieve a degree of precision and speed that keyboard-only controls cannot match. The keyboard is best for easy lateral and forward/backward movement, and for jumping.

For more information, troubleshooting, and performance-enhancement tips, see the online README.TXT file or the printed manual for Unreal.

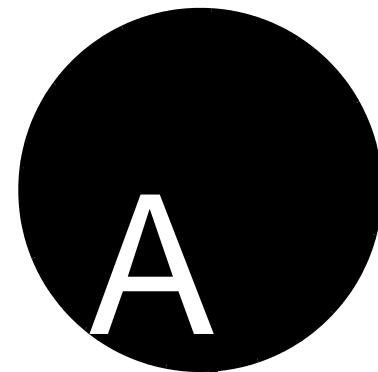

## General Specifications

---

This section lists the specifications of your card.

### Features

#### PCI Bus Mastering

- ☐ PCI Specification Version 2.1 compliant
- ☐ Bus mastering reduces latency and speeds up system performance

#### EMU10K1

- ☐ Advanced hardware accelerated digital effects processing
- ☐ 32-bit digital processing while maintaining a 192 dB dynamic range
- ☐ Patented 8-point interpolation that achieves the highest quality of audio reproduction
- ☐ 64-voice hardware wavetable synthesizer
- ☐ Professional-quality digital mixing and equalization
- ☐ Up to 32 MB of sound RAM mapped to host memory

#### Stereo Digitized Voice Channel

- ☐ True 16-bit Full Duplex operation
- ☐ 16-bit and 8-bit digitizing in stereo and mono modes
- ☐ Playback of 64 audio channels, each at an arbitrary sample rate
- ☐ ADC recording sampling rates: 8, 11.025, 16, 22.05, 24, 32, 44.1 and 48 kHz
- ☐ Dithering for 8-bit and 16-bit recording

#### AC '97 Codec Mixer

- ☐ Mixes EMU10K1 audio sources and analog sources such as CD Audio, Line In, Microphone, Auxiliary, TAD and PC Speaker
- ☐ Selectable input source or mixing of various audio sources for recording
- ☐ 16-bit Analog-to-Digital conversion of analog inputs at 48 kHz sample rate

#### Volume Control

- ☐ Software record and playback control of Master, Digitized Voice, and inputs from MIDI device, CD Audio, Line, Microphone, Auxiliary, TAD, PC Speaker, SPDIF, Wave/DirectSound device, and CD Digital (CD SPDIF)
- ☐ Separate bass and treble control
- ☐ Front and Rear Balance control
- ☐ Muting and balance control for individual playback sources

#### E-mu Environmental Modeling™

- ☐ Realistic 3D experience that increases depth and breadth in perceived audio
- ☐ Highly accurate positioning of audio objects in 3D space
- ☐ Exceptional reproduction of various ambient and environmental effects

#### DynaRAM™

- ☐ Dynamically allocating host memory for storing and processing sound samples
- ☐ Need not rely on onboard audio card memory

#### Creative Multi Speaker Surround™ (CMSS™)

- ☐ Multi-speaker technology
- ☐ Professional-quality panning and mixing algorithm
- ☐ Independent multiple sounds can be moved and placed around a listener

## Connectivity

#### Audio Inputs

- ☐ One line-level analog Line input via stereo jack on rear bracket
- ☐ One mono Microphone analog input via stereo jack on rear bracket
- ☐ CD\_IN line-level analog input via 4-pin Molex connector on card

- ❑ AUX\_IN line-level analog input via 4-pin Molex connector on card
- ❑ TAD line-level analog input via 4-pin Molex connector on card
- ❑ CD\_SPDIF digital input via 2-pin Molex connector on card, accepting sampling rates of 32, 44.1 and 48 kHz

#### Audio Outputs

- ❑ Two line-level analog outputs via stereo jacks on rear bracket, Front and Rear Line-Outs
- ❑ Stereo headphone (32-ohm load) support on Front Line-Out

#### Interfaces

- ❑ MB\_PRO 2x5 pin header
- ❑ PC\_SPK 1x2 pin header
- ❑ SPDIF\_EXT (SPDIF Digital I/O) 2x6 pin header

## SB Emulation in MS-DOS/ Windows 95/98

---

This appendix is organized as follows:

- ❑ Background
- ❑ Understanding the Installation Program in Windows 95/98
- ❑ Understanding the System Resource Settings
- ❑ Understanding the Environment Variables
- ❑ Determining Resources
- ❑ Selecting the Best Audio Options in a Game
- ❑ MS-DOS Mode Utilities

### Background

Legacy games in the market have been designed for only MS-DOS. SB Live! Value supports MS-DOS games. There are two ways to play MS-DOS games:

#### ❑ **From the MS-DOS box in Windows 95/98**

This is the recommended method.

*To open the box:*

- Click the Start button on the taskbar of Windows 95/98, point to Programs, and then click MS-DOS Prompt.

### ❑ In the Windows 95/98 MS-DOS mode

There could be times when you do not want to or cannot run a game from the MS-DOS box. The game may be incompatible with Windows 95/98, or there is insufficient system resources to play the game with Windows 95/98 loaded. In such cases, use the MS-DOS mode, in which only the real-mode portions of Windows 95/98 are loaded.

*To restart the system in MS-DOS mode when you are already in Windows 95/98:*

1. Click the Start button on the taskbar, and then click Shutdown.
2. Click the Restart The Computer In MS-DOS Mode option button, and then click the OK button.

*To start the system in MS-DOS mode at system startup:*

1. At startup as Windows 95/98 is loading, hold the F8 key.
2. At the startup menu, choose the Command Prompt Only option, and then press <Enter>.

## Understanding the Installation Program in Windows 95/98

The installation program modifies your AUTOEXEC.BAT and CONFIG.SYS files.

### The AUTOEXEC.BAT File Settings

The installation program adds the following statements to the AUTOEXEC.BAT file:

```
SET CTSYN=C:\WINDOWS
SET BLASTER=A220 I5 D1 H5 P330 T6
C:\PROGRA~1\CREATIVE\SBLIVE\DOSDRV\SBEINIT.COM
```

The first two statements set up the environment variables for your audio card. For an explanation of the variables, see “Understanding the Environment Variables” on page B-6.

The third statement runs the SBEINIT.COM driver. SBEINIT.COM is the SB Live! MS-DOS driver. It is required for the SB Live! Value card to function properly under MS-DOS mode. The syntax



for the statement is as follows:

```
<SB Live! path>\SBEINIT.COM
```

SBEINIT.COM requires that the HIMEM.SYS and EMM386.EXE files are loaded. If needed, the installation program adds the necessary HIMEM.SYS and EMM386.EXE lines to your CONFIG.SYS file, creating the file if it is not present.

On the rare occasion a program does not work with expanded memory, simply add the NOEMS parameter to your memory manager. For example:

```
DEVICE=C:\WINDOWS\EMM386.EXE NOEMS
```

if C:\WINDOWS is your Windows directory.

You may load this driver into high memory in the AUTOEXEC.BAT file, even though the default is not. For example:

```
LOADHIGH=C:\PROGRA~1\CREATIVE\SBLIVE\DOSDRV\SBEINIT.COM
```

Do not remove the memory manager altogether. Do not attempt to load SBEINIT.COM into high memory when using the NOEMS option if SBEINIT.COM fails to run SBELOAD.EXE or SBECFG.EXE.

In the rare case that an MS-DOS game will not work with a memory manager, you will not be able to use the SB Live! Value card with the game.

## The CONFIG.SYS File Settings

The installation program adds the following statements to the CONFIG.SYS file:

```
DEVICE=C:\WINDOWS\HIMEM.SYS  
DEVICE=C:\WINDOWS\EMM386.EXE
```

## Understanding the System Resource Settings



If your card encounters a conflict with a peripheral device, you may need to change its resource settings. For details, see “Resolving I/O Conflicts” on page D-5.

When any resource setting is changed, make sure that the environment variables (see “Understanding the Environment Variables” on page B-6) reflect the changes as well. You can view your system environment by typing **SET** at the DOS prompt.



In the following tables, the preferred values are in bold.

This section explains the following software SB emulation resources—not hardware resources—of your card:

- ☐ Input/Output (I/O) Addresses
- ☐ Interrupt Request (IRQ) Line
- ☐ Direct Memory Access (DMA) Channel

## Input/Output (I/O) Addresses

I/O addresses are communication areas used by your computer's central processor to distinguish among various peripheral devices connected to your system when sending or receiving data.

*Table B-1: Possible default input/output (I/O) addresses.*

Device	Default I/O Address Range
SB interface	<b>220H to 22FH</b> 240H to 24FH 260H to 26FH 280H to 28FH
MPU-401 UART MIDI interface	300H to 301H 310H to 311H 320H to 321H <b>330H to 331H</b>
Stereo music synthesizer	<b>388H to 38BH</b>

## Interrupt Request (IRQ) Line

An IRQ line is a signal line that a device uses to notify your computer's central processor that it wants to send or receive data for processing.

*Table B-2: Possible default interrupt request (IRQ) line assignment.*

Device	Default IRQ Line
SB interface	<b>5, 7, 9, 10</b>

## Direct Memory Access (DMA) Channel

A DMA channel is a data channel that a device uses to transfer data directly to and from the system memory.

*Table B-3: Possible default direct memory access (DMA) channel assignment.*

Usage	Default DMA Channel
First DMA channel	0, 1, 3
Second DMA channel	5, 6, 7

## Understanding the Environment Variables

Environment variables are used to pass hardware configuration information to the software in your system. For MS-DOS, your audio card includes the following:

- ☐ CTSYN Environment Variable
- ☐ BLASTER Environment Variable

### CTSYN Environment Variable

The CTSYN environment variable points to the location of the CTSYN.INI file, which usually resides in the Windows directory. The syntax for this variable is as follows:

CTSYN=path

where path is the location of the CTSYN.INI file.

### BLASTER Environment Variable

The BLASTER environment variable specifies the base I/O address, IRQ line, and DMA channels of the SB interface. Its syntax is:

BLASTER=A220 I5 D1 H5 P330 T6

The parameters in the command are as follows.

#### **This**

#### **Parameter Specifies**

Axxx SB interface's base I/O address.

Ix	IRQ line used by the audio interface.
Dx	First DMA channel used by the audio interface.
Hx	Second DMA channel used by the audio interface.
Pxxx	MPU-401 UART interface's base I/O address.
Tx	Card type. <i>x</i> must be 6.

## Determining Resources

*To find the current SB Live! SB16 Emulation resources in Windows 95/98:*

1. Click the Start button, point to Settings, and then click Control Panel.
2. In the Control Panel window, double-click the System icon.
3. In the System Properties dialog box, click the Device Manager tab.
4. Double-click Creative Miscellaneous Devices, and then double-click Creative SB Live! SB16 Emulation.
5. Click the Resources tab.

You can use the information in the resource list to help you configure MS-DOS games for use with the SB Live! Value card.

The resource list may show three entries of “Input/Output Range” and two entries of “Direct Memory Access”. They correspond to the sequence of entries in Table B-1 and Table B-3. If the number of entries do not match, a good estimate of the identity of the device is its I/O address or DMA channel.

*To find the current SB Live! SB16 Emulation resources in MS-DOS mode:*

1. Switch to your SB Live! DOS driver directory, that is:  
C:\PROGRA~1\CREATIVE\SBLIVE\DOSDRV
2. Type **SBECFG** and then press <Enter>.

Some older games may have difficulty detecting the SB Live! card at certain resource settings. Typically, these games would expect the card to be at a fixed set of resources and would fail to



The MS-DOS driver SBEINIT.COM must be running for SBECFG.EXE to work properly.

## Selecting the Best Audio Options in a Game

load if those resources are not detected. If you have older MS-DOS games that do not work properly, try changing the SB Live! SB16 Emulation configuration. Use the following as a guide:

**Problem:** Sound Blaster emulation is not recognized.

**Resource:** Try switching the SB Emulation IRQ between 5 and 7, use DMA channel 1, use SB interface port 220.

**Problem:** The MPU-401emulation is not recognized.

**Resource:** Try using Port address 330.

Most MS-DOS-based games that provide sound have some procedure for audio setup. These procedures generally present you with a list of popular audio cards or audio devices from which to choose.

The methods used by games to present audio options can vary greatly. Some may present a single choice that corresponds to a particular audio device, that is, Sound Blaster, Sound Blaster 16, Roland Sound Canvas, and so on. Others will provide an option for music and digital audio separately; for example, General MIDI music with Sound Blaster digital audio. In such a case, there are often two separate menus to configure.

Some games allow you to set the MIDI port address and IRQ for music and sound. Make sure that these settings correspond to the values displayed by SBECFG.EXE or the Resources tabbed page of the Creative SB Live! SB16 Emulation Properties dialog box.

There are games that offer MPU-401/Roland (General MIDI or MT-32/LAPC-1) as an option. Often these games allow you to set the MIDI port address. Make sure that they match the MIDI address in the Resources list on Resources tabbed page of the Creative SB Live! SB16 Emulation Properties dialog box. The same values can be found under “MPU-401 (General MIDI, Roland MT-32/LAPC-1) Emulation”, displayed by SBECFG.EXE in MS-DOS mode. Remember to enable the MT-32 MIDI patch with the SBEMIXER program if you select Roland MT-32 or LAPC-1 for music.

## Music Options

Most MS-DOS games offer a menu choice for sound when they start up. If you have a choice between General MIDI and MT-32, always choose General MIDI, since it will provide you with the best sound quality. If you need to use MT-32, you must first switch from the General MIDI instrument set (the default) to the MT-32 instrument set using SBEMIXER. Be sure to switch back to the General MIDI set when you are finished using the MT-32 instrument set.

## Digital Audio Options

SB Live! supports Sound Blaster, Sound Blaster Pro, Sound Blaster 16, and Adlib digital audio emulation. If an application provides all these as options, specify the choices in this order:

1. Sound Blaster 16
2. Sound Blaster Pro
3. Sound Blaster
4. Adlib

## MS-DOS Mode Utilities

The SB Live! Value card includes a few MS-DOS utilities. These utilities require the SB Live! DOS driver SBEINIT.COM to be loaded.

### SBECFG.EXE

Use the SBECFG.EXE utility to obtain the hardware settings and the status of the SB Live! Value card. Typing **SBECFG.EXE** at the command prompt displays the following hardware settings:

- ☐ PCI Hardware Settings: Port, IRQ
- ☐ Sound Blaster Emulation: Port, IRQ, DMA
- ☐ MPU-401 Emulation (GM, Roland MT-32/LAPC-1) Emulation: Port
- ☐ Adlib Emulation: Port

The emulation settings appear only if they are enabled.

### SBEMIXER.EXE

Use SBEMIXER.EXE to change the volume levels of the MPU-401 instrument set used on the SB Live! card. You can use SBEMIXER.EXE from the command line—useful for advanced users

who want to set up batch files with particular volume levels—or within the SBEMIXER screen. The settings for SBEMIXER.EXE are independent of the Creative Mixer settings in Windows 95/98.

*To set SBEMIXER values in the command line:*

At the DOS prompt, type the SBEMIXER command in a single line. Its syntax is:

```
SBEMIXER [ /S:x ] [ /W:x ] [ /C:x ] [ /M:x ] [ /? ]
```

where square brackets [ ] denote optional parameters, and:

**This**

**Parameter      Specifies**

/S:x	Synth volume. <i>x</i> can be a value from the range 0 to 127.
/W:x	Wave volume. <i>x</i> can be a value from the range 0 to 127.
/C:x	CD audio volume. <i>x</i> can be a value from the range 0 to 127.
/M:x	Synth MT-32/LAPC-1 mode. For <i>x</i> , 0 is Off, 1 is On.
/?	View a short description of the parameters.

An example of an SBEMIXER command is

**SBEMIXER /S:64 /W:120 /C:50 /M:0**

which corresponds to “set the synth volume to 64, the Wave volume to 120, the CD audio volume to 50, and turn off the Synth MT-32/LAPC-1 mode”.

*To set SBEMIXER values within the Mixer screen:*

- At the DOS prompt, type

**SBEMIXER**

The interactive editor mode allows you to change the mixer settings with the mouse, <Tab>, <PgUp>, <PgDn>, or arrow keys.

Use the Save button to save the settings for the next session.



## SBESSET.EXE

Use SBESSET.EXE to manually configure SB resources or disable SB Emulation. By default, SB Emulation in DOS follows the Windows settings. For example, if you disable SB Emulation in Windows, in the next boot to DOS SB Emulation in DOS is disabled. Under rare circumstances you may need to manually reconfigure DOS SB Emulation, for example, if there is conflict in DOS before it can boot to Windows. SBESSET.EXE is run from the command line.

*To set SBESSET values in the command line:*

At the DOS prompt, type the SBESSET command in a single line. Its syntax is:

```
SBESSET [-Axxx] [-Ix] [-Dx] [-Hx] [-Pxxx] [-dx] [-wx]
```

where square brackets [ ] denote optional parameters, and:

### This

#### Parameter Specifies

-Axxx	SB interface's base I/O address.
-Ix	IRQ line used by the audio interface.
-Dx	First DMA channel used by the audio interface.
-Hx	Second DMA channel used by the audio interface.
-Pxxx	MPU-401 UART interface's base I/O address.
-dx	SB Emulation mode. For <i>x</i> , 1 is Off, 0 is On.
-wx	Set <i>x</i> to 1 to use the Windows-assigned resource configuration. Set <i>x</i> to 0 to use (your) user-assigned resource configuration.

An example of an SBESSET command is

**SBESSET -A240 -I5 -D3 -w0**


which corresponds to “set the SB interface's base I/O address to 240, the IRQ line used by the audio interface to 5, the First DMA channel used by the audio interface to 3, and use the Windows-assigned resource configuration”.

## SBEGO.EXE

Use this to confirm whether SB16 Emulation is properly installed and working.



See “Understanding the System Resource Settings” on page 4 for a list of the possible values.

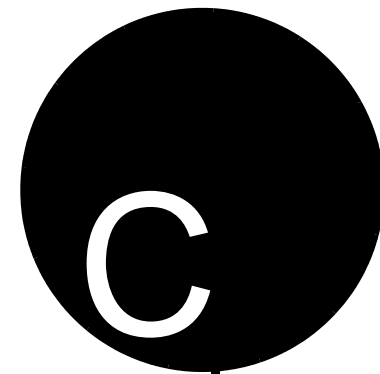

## Changing Audio Card Settings

---

You might want to disable interfaces that you are not using to free up resources, for example, when you do not have enough IRQ lines.

This appendix is organized as follows:

- ❑ Enabling/Disabling Gameport Joystick Interface
- ❑ Enabling/Disabling Other Features

### Enabling/Disabling Gameport Joystick Interface

The Gameport Joystick interface on your audio card can be enabled or disabled in Windows 95/98.

*To enable or disable the interface in Windows 95/98:*

1. Click the Start button, point to Settings, and then click Control Panel.
2. In the Control Panel window, double-click the System icon.
3. In the System Properties dialog box, click the Device Manager tab.
4. Double-click Sound, Video And Game Controllers, and then select Creative Gameport Joystick.
5. Click the Properties button.

6. In the Properties dialog box:

If you have an Original Configuration (Current) check box:

- To enable the interface, make sure that the check box is selected.  
To disable it, clear the check box.

If you have a Disable In This Hardware Profile check box:

- To enable the interface, clear the check box.  
To disable it, make sure that the check box is selected.

7. Click OK to restart Windows and for the change to take effect.

When the Gameport Joystick interface is disabled, the entry in Device Manager has a red cross.

## Enabling/Disabling Other Features

In Windows 95/98 and Windows NT 4.0


To open an AudioHQ applet from the Sound Blaster menu

To open an AudioHQ applet from Creative Launcher

Use the applets under Creative AudioHQ to enable or disable features such as Stereo Enhancement Effect.

Click the Start button on the taskbar, point to Programs, point to Creative, point to Sound Blaster Live! Value, and then click AudioHQ.  
Check out the applets within the AudioHQ window.

Click Creative Launcher at the top or bottom of your computer screen, and then click the AudioHQ tab.  
Check out the applets indicated by the icons in the second row of Launcher.

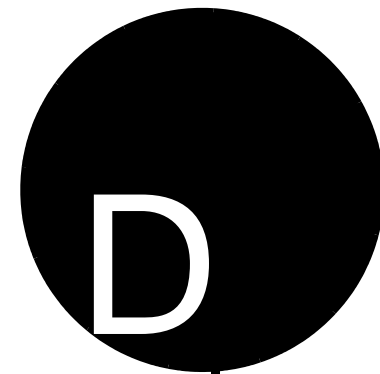

# Troubleshooting

---

This appendix provides tips for solving problems you may encounter during installation or normal use.

## Problems Installing Software

**In Windows 95/98, the installation does not start automatically after the CD-ROM is inserted.**

The AutoPlay feature in your Windows 95/98 system may not be enabled.

*To start the installation program through the My Computer shortcut menu:*

1. Double-click the My Computer icon on your Windows desktop.
2. In the My Computer window, right-click the CD-ROM drive icon.
3. On the shortcut menu, click AutoPlay and follow the instructions on the screen.

*To enable AutoPlay through Auto Insert Notification:*

1. Click the Start button, select Settings, and then click Control Panel.
2. In the Control Panel window, double-click the System icon.
3. In the System Properties dialog box, click the Device Manager tab and select your CD-ROM drive.
4. Click the Properties button.
5. In the Properties dialog box, click the Settings tab and select Auto Insert Notification.
6. Click the OK button to exit from the dialog box.

## Problems With Sound



If, instead, you decide to select the “What U Hear” device icon in the Record Control view, then of these five sources in the Play Control view, you can unmute only one at a time. Therefore, you can get sound from the rear speakers only from the unmuted source.

### **There is unexpected excessive environmental sound or effects when an audio file is being played.**

The last selected preset is an inappropriate environment for the current audio file.

*To switch to an appropriate environment:*

1. Open Environmental Audio Control applet.

**OR**

Display Creative Launcher at the top or bottom of your screen (bring your mouse pointer to the top edge of the screen to display Launcher). Then, click the Environments tab.

2. In the Environment list, select “No effects” or an appropriate environment.

### **No sound from the headphones.**

*Check the following:*

- ☐ The headphones are connected to the Line Out jack.
- ☐ In the Speaker applet (click the AudioHQ icon on the taskbar, and then click the Speaker icon), make sure the Output field is set to Headphones.

### **In a 4-speaker configuration, there is no sound from the rear speakers.**

*Check the following:*

- ☐ The rear speakers are connected to the audio card’s Rear Out jack.
- ☐ If you are playing sound from one of these sources.
  - CD Audio
  - Line In
  - TAD
  - Auxiliary (AUX)
  - Microphone

*To solve the problem:*

1. In Creative Mixer's Play Control view, make sure the check box of the source being played is unmuted, that is, enabled.
2. In the Record Control view, make sure the corresponding check box is also selected.

For example, if you are playing DVD games or movies, make sure in Creative Mixer you unmute the Auxiliary device in the Play Control view and select the Auxiliary device in the Record Control view. For more details, see "Connecting Creative PC-DVD" on page 1-6.

- ☐ If you have changed environments, go to the Record Control view of Creative Mixer and make sure that the check boxes of your active sources are selected.

### **No audio output when playing digital files such as WAV, MIDI files or AVI clips.**

*Possible causes:*

- ☐ The speaker volume knob (if any) is not set properly.
- ☐ The external amplifier or speakers are connected to the wrong jack.
- ☐ There is a hardware conflict.
- ☐ The output selection in the Configuration tabbed page of the Speaker applet is incorrectly selected.
- ☐ The Original Sound sliders in either the Master and Source tabbed pages of the Environmental Audio applet are set at or near 0%.

*Check the following:*

- ☐ The speakers' volume control knob, if any, is set at mid-range. Use Creative Mixer to adjust the volume, if necessary.
- ☐ The powered speakers or external amplifier are connected to the card's Line Out or Rear Out jack.
- ☐ No hardware conflict between the card and a peripheral device. See "Resolving I/O Conflicts" on page D-5.

- ☐ The output selection in the Speaker applet corresponds to your speaker or headphone configuration.
- ☐ The Original Sound sliders in either or both the Master and Source tabbed pages of the Speaker applet are set to 100%.

**No audio output when playing CD-Audio.**

**OR**

**No audio output when playing DOS games that require a CD-ROM.**

*To solve this problem:*

- Make sure the CD audio cable between the CD-ROM drive and the audio card is connected.

## Insufficient SoundFont Cache



The trade-off of a smaller SoundFont bank is its lower sound quality.

**There is insufficient memory to load SoundFonts.**

This may occur when a SoundFont-compatible MIDI file is loaded or played.

*Cause: There is insufficient memory allocated to SoundFonts.*

*To allocate more SoundFont cache:*

- On the Options tabbed page of the SoundFont Control applet, move the SoundFont Cache slider to the right.

The amount of SoundFont cache you can allocate depends on the system RAM available.

*If there is still insufficient system RAM available:*

- On the Configure Banks tabbed page of the SoundFont Control applet, select a smaller SoundFont bank from the Select Bank box.  
The smallest SoundFont bank available is 2 MB (2MGGSMT.SF2).

## Problems With Joystick



Do not attempt to make changes to the BIOS unless you have experience with system software.

## Resolving I/O Conflicts

### **The joystick port is not working.**

The audio card's joystick port conflicts with the system's joystick port.

*To solve this problem:*

- Disable the audio card's joystick port and use the system port instead. For details, see "Enabling/Disabling Gameport Joystick Interface" on page C-1.

### **The joystick is not working properly in some programs.**

The program may use the system processor timing to calculate the joystick position. When the processor is fast, the program may determine the position of the joystick incorrectly, assuming that the position is out of range.

*To solve this problem:*

- Increase your system's 8 bit I/O recovery time of the BIOS setting, usually under the Chipset Feature Settings section. Or, if available, you may adjust the AT Bus speed to a slower clock. If the problem persists, try a different joystick.

Conflicts between your audio card and another peripheral device may occur if your card and the other device are set to use the same I/O address.

To resolve I/O conflicts, change the resource settings of your audio card or the conflicting peripheral device in your system using Device Manager in Windows 95/98.

If you still do not know which card is causing the conflict, remove all cards except the audio card and other essential cards (for example, disk controller and graphics cards). Add each card back until Device Manager indicates that a conflict has occurred.

*To resolve hardware conflicts in Windows 95/98:*

1. Click the Start button, point to Settings, and then click Control Panel.
2. In the Control Panel window, double-click the System icon.





You can also refer to the Troubleshooting section in the Help file of Windows 95/98.

## Problems in Windows NT 4.0

3. In the System Properties dialog box, click the Device Manager tab.
4. Under the Sound, Video And Game Controllers entry, select the conflicting audio card driver—indicated by an exclamation mark (!)—and click the Properties button.
5. In the Properties dialog box, click the Resources tab.
6. Make sure that the Use Automatic Settings check box is selected, and click the OK button.
7. Restart your system to allow Windows 95/98 to reassign resources to your audio card and/or the conflicting device.

### **A Service Control Manager error message appears with one or more other error messages at system restart.**

This occurs after you remove an audio card from your computer after you have successfully installed the Sound Blaster Live! card. Windows is trying to match the drivers to the removed audio card.

*To solve this problem:*

1. Log on to your computer as Administrator.
2. Click the Start button, point to Settings, and then click Control Panel.
3. Double-click the Multimedia icon, and then click the Devices tab.
4. In the list, remove from under these entries
  - Audio Devices
  - MIDI Devices And Instrumentsthe items other than
  - Audio for Creative SB Live!
  - MIDI for Creative SB Live!
  - MIDI for Creative S/W Synth

5. Click the OK button to close the dialog box.  
The drivers are removed.

## Problems with Encore DVD Player

**The Encore DVD Player is not launched when a DVD disc is inserted into the drive.**

*To solve this problem:*

1. In the Windows system tray, right-click the Disc Detector icon, and then click Properties.
2. On the General tabbed page of the Creative Disc Detector dialog box, make sure that Enable Disc Detector check box is selected.
3. Click the Players tab.
4. Select the DVD Disc entry and then click the Select Player button.
5. In the Players Properties dialog box, click the Browse button.
6. Browse to C:\Program Files\Creative\PC- DVD Encore and double-click the entry **ctdvdply**  
The Name box now displays the entry *ctdvdply*.
7. Click the OK button twice to close.

Now when you double-click the Disc Detector icon, the Encore DVD Player is launched.