



Quick Install Guide
for Windows 98, ME, 2000

DFE-530TX+
Fast Ethernet Adapter

Contents of Package:

DFE-530TX+ Fast Ethernet Adapter
Quick Install Guide
CD-ROM, which includes driver software

If any of the above items are missing, please contact your reseller.

DO NOT insert the DFE-530TX+ into the computer's PCI slot before installing the drivers.

Pre-installation Procedures:

If you have already installed the DFE-530TX+ into a PCI slot, advanced users may utilize the "Add New Hardware Wizard" to manually specify the location of the driver on the CD-ROM.

Otherwise, we strongly recommend canceling the "Add New Hardware Wizard" and instead using the "Install Drivers" program in the CD-ROM.

Here is **quick summary** of the proper installation procedure:

- **Run** the driver installation from the DFE-530TX+ CD-ROM.
- **Turn Off** the computer and **install the DFE-530TX+** into the PCI slot.
- **Restart** the computer to complete the installation.




Installing the DFE-530TX+ Drivers

- Turn **ON** the computer.
- Insert the **driver CD**, which is included with the DFE-530TX+, into the CD-ROM drive. The following window will appear.




Click on “Install Drivers.”

For Windows 2000 and Windows ME users, the following screen will appear.



Click OK

For **Windows 98/98SE** users, this screen will be displayed.

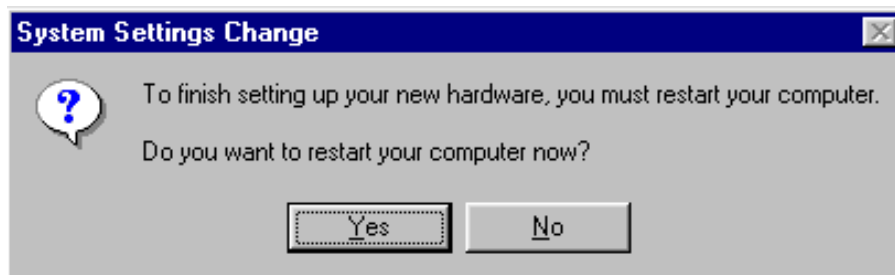


Click No

Next, TURN OFF the computer and unplug the power cord.

2

Installing the DFE-530TX+ into the computer's PCI slot

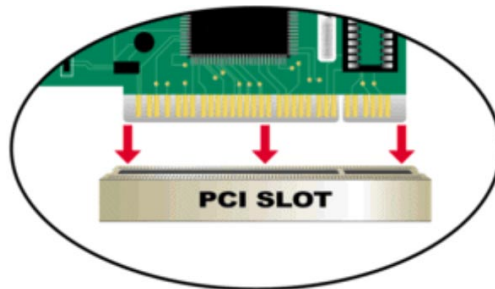

Note: To avoid static electric charges, please touch an unpainted screw on the outside of the power supply before installing or working with the DFE-530TX+.


- **Turn off** your computer and **unplug** the power cord.
- **Remove** the back cover of your computer. (Refer to your computer's manual if needed.)
- **Locate** an available PCI slot. PCI slots are usually white or cream colored.
- **Remove** the backplate (the small piece of metal that covers the opening for the PCI card on the back cover that you just removed.)
- **Insert** the DFE-530TX+ carefully and firmly into the PCI slot.
- **Secure** the DFE-530TX+ with the screw from the backplate.
- **Replace** your computer's cover.

3

Finishing the Installation


- **TURN ON** the computer.

For **Windows 98/98SE** and **Windows ME** users, the following screen will appear.

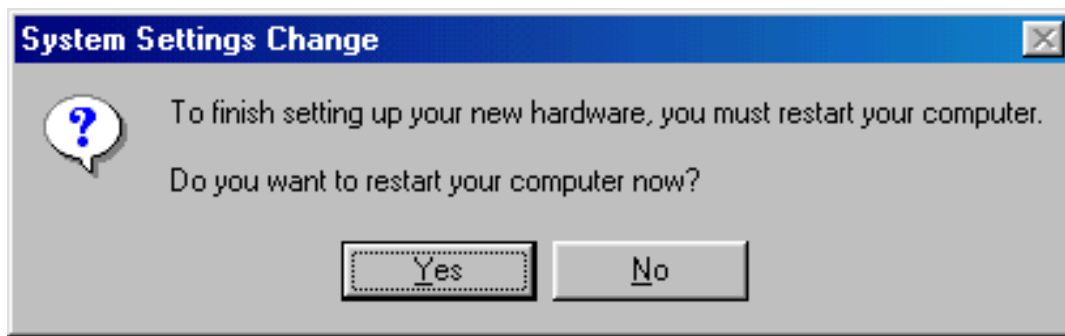

Click Yes, to restart the computer.

For **Windows 2000** users, this screen will be displayed.



Click Yes, to complete the installation.

(Note: Windows 2000 will not require a restart.)

4

Checking the Installation

- Go to START>RUN.
- Type "winipcfg." (In Win2000, type "ipconfig/all.") In some cases it may be necessary to "Release and Renew" the IP address. Make sure to select the DFE-530TX+ as the specified adapter in the pull down menu.
- If the IP address belongs to the same IP range and subnet mask as the local network, then open the web browser and test the Internet connection.

CONTACTING TECHNICAL SUPPORT

You can find the most recent software and user documentation on the D-Link website.

D-Link provides free technical support for customers within the United States for the duration of the warranty period on this product.

U.S. customers can contact **D-Link** technical support through our web site, e-mail, or by phone.

United States technical support is available Monday through Friday from 6:00 a.m. to 6:00 p.m. (PST.)

Web:

<http://www.dlink.com>

Email:

support@dlink.com

Phone:

949-788-0805 (option #4)

*If you are a customer residing outside of the United States, please refer to the list of **D-Link** locations that is included in the User's manual.*

D-Link[®]
Building Networks for People
Printed in Taiwan