

5 System Schematic Diagrams and PCB Silkscreen

5-1 System Main Board Schematic Diagrams

Table of Contents

1. COVER --(SHEET1)
2. BLOCK DIAGRAM --(SHEET2)
3. BOARD INFORMATION --(SHEET3)
4. CLOCK GENERATOR --(SHEET4)
5. BANIAS LV CPU --(SHEET5/6)
6. 855GM <MONTARA-GM> --(SHEET7/8/9/10)
7. DDR On-board Memory --(SHEET11)
8. DDR SODIMM --(SHEET12)
9. DDR S/P TERMINATION --(SHEET13/14)
10. ICH4-M --(SHEET15/16/17)
11. FWH --(SHEET18)
12. LCD INTERFACE --(SHEET19)
13. CARDBUS & 1394 --(SHEET20/21)
14. LOM (82562EZ) --(SHEET22/23)
15. AUDIO(CS4202) --(SHEET24)
16. MICOM(HD64F2169) --(SHEET25)
17. MICOM POWER,POWER SWITCH --(SHEET26)
18. THERMAL SENSOR --(SHEET27)
19. USB HDD CONNECTOR --(SHEET28)
20. SUPER I/O,KEYB'D,TOUCHPAD --(SHEET29)
21. MINI-PCI --(SHEET30)
22. DC/DC,3.3V_LAN,5V_AUX --(SHEET31)
23. DDR 2.5V_AUX/1.25V --(SHEET32)
24. BATT CHARGER --(SHEET33)
25. VCC_CORE/IMVP4 --(SHEET34)
26. VCCP/VCC_MCH --(SHEET35)
27. 1.5V_AUX/1.8V --(SHEET36)
28. DOCKING CONNECTOR --(SHEET37)
29. MOUNT HOLE --(SHEET38)
30. TOUCHPAD IF BOARD --(SHEET39)
31. TEST POINT & DUMMY CAP --(SHEET40)


CETUS

CPU : BANIAS LV
 Chip Set : 855GME
 Remarks : 8 Layer


Model Name : CETUS-R Main
 PCB Code : BA41-00421A
 Dev. Step : MP
 Revision : 1.0
 T.R. Date : 2003. 12. 28

DRAW	CHECK	APPROVAL
WS JUNG	HJ KIM	Kevin


5-1-1(a) System Main Board Schematic Sheet 2 of 40(BLOCK DIAGRAM)

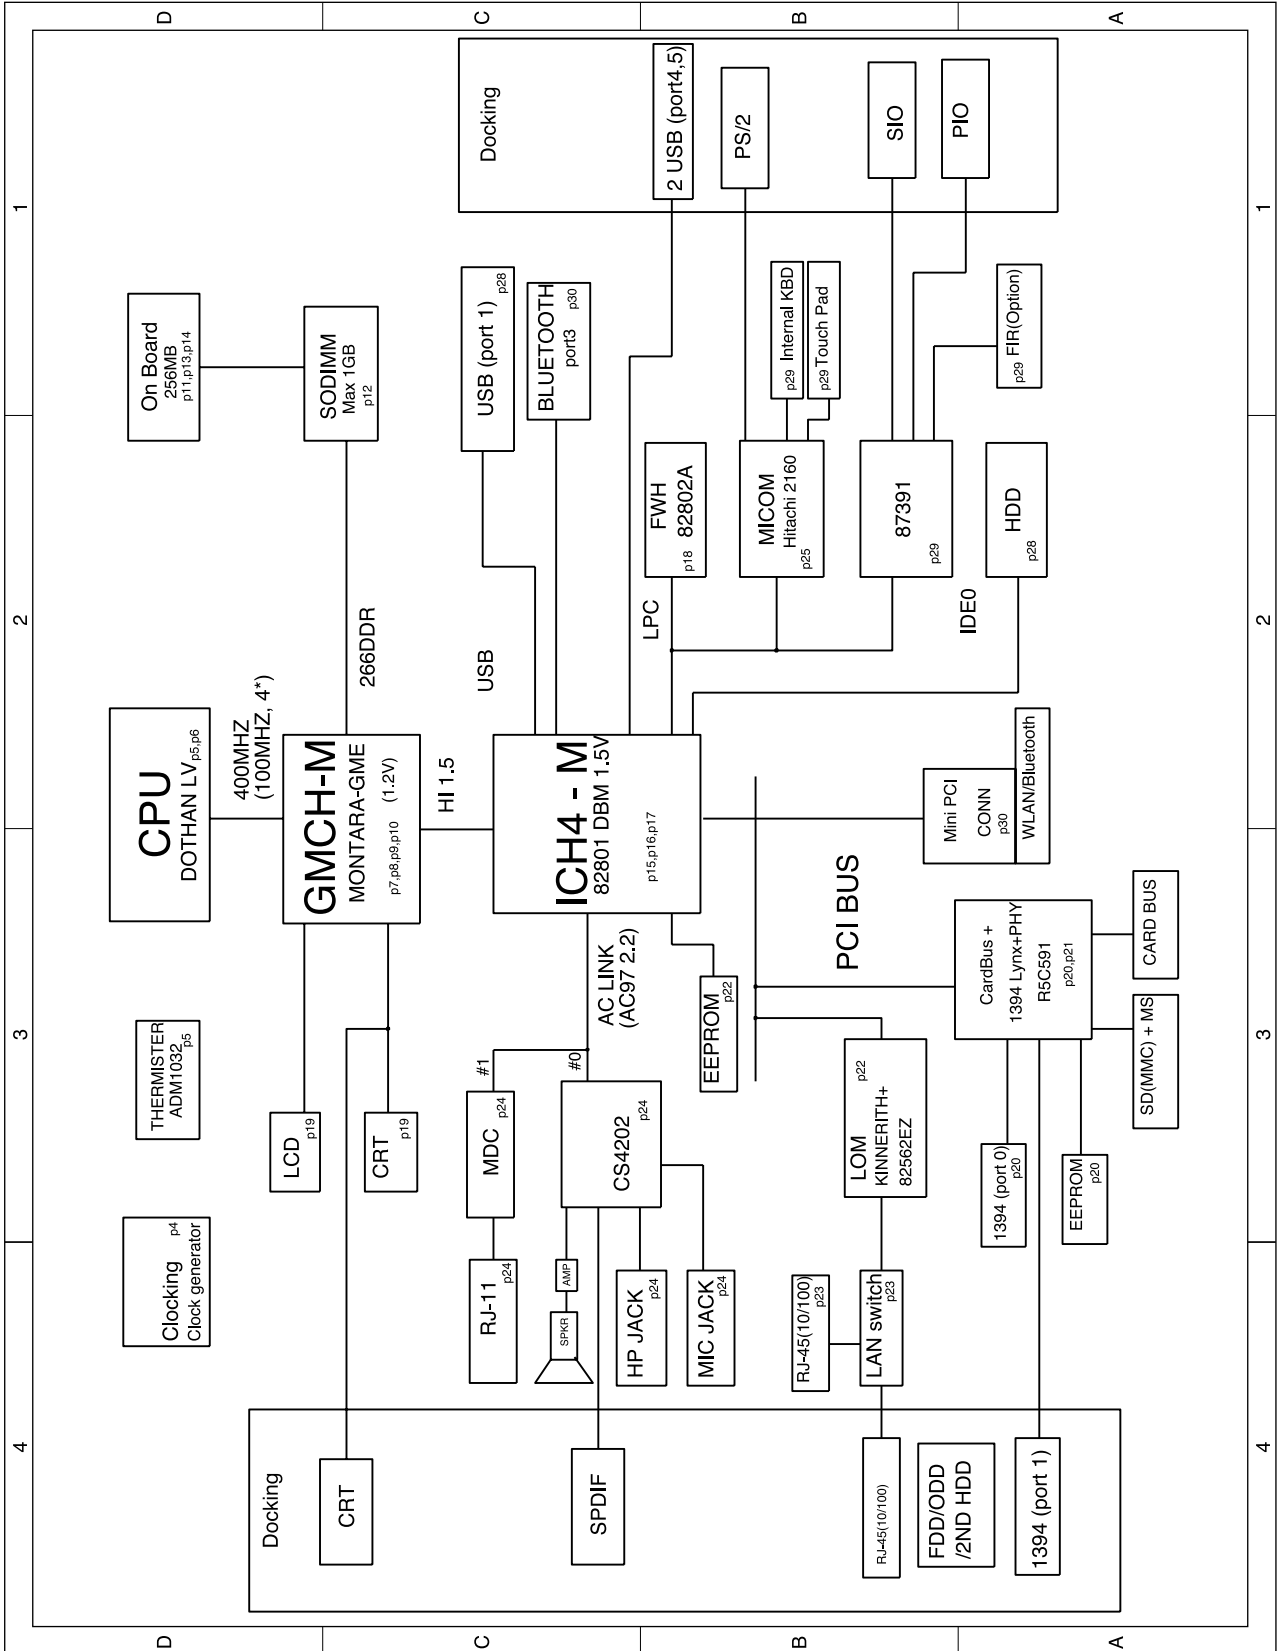


5-1-1(c) System Main Board Schematic Sheet 4 of 40(CLOCK GENERATOR)

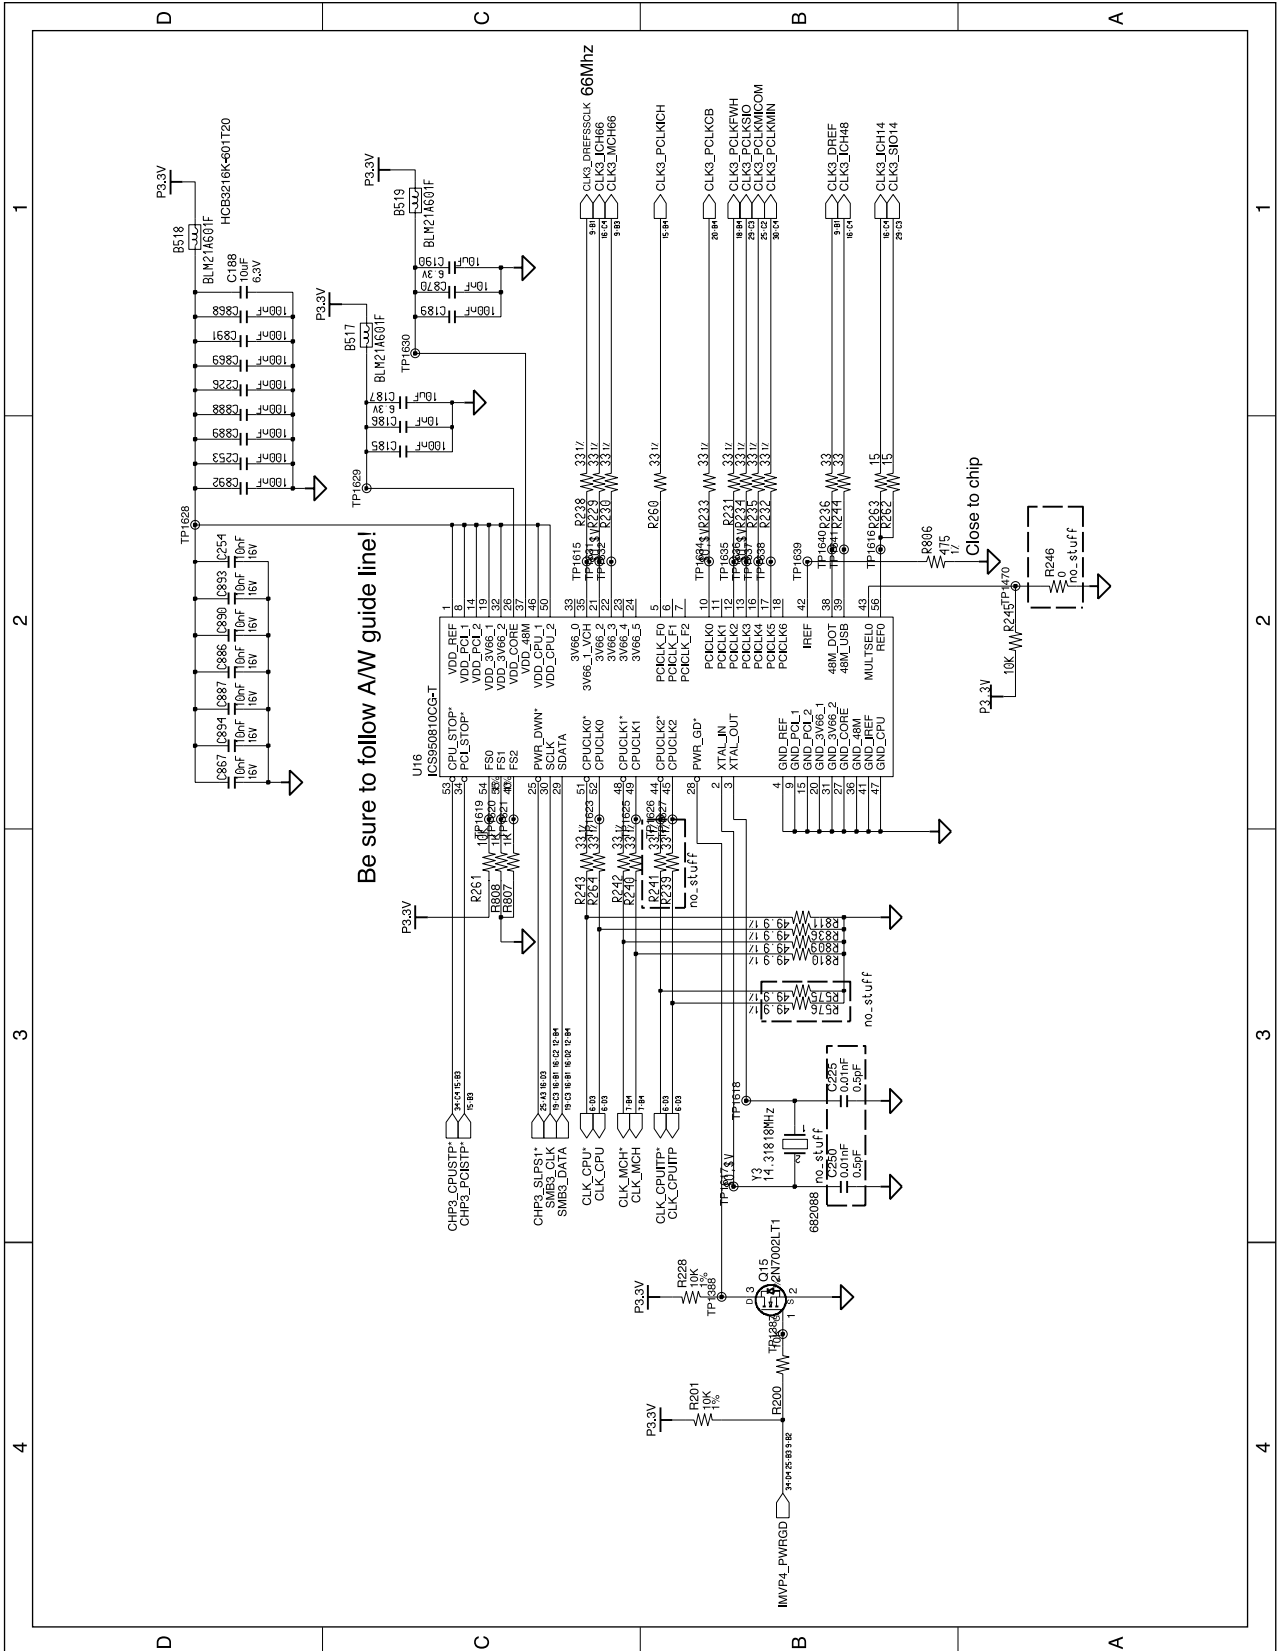


5-1-1(e) System Main Board Schematic Sheet 6 of 40(BANIAS CPU)

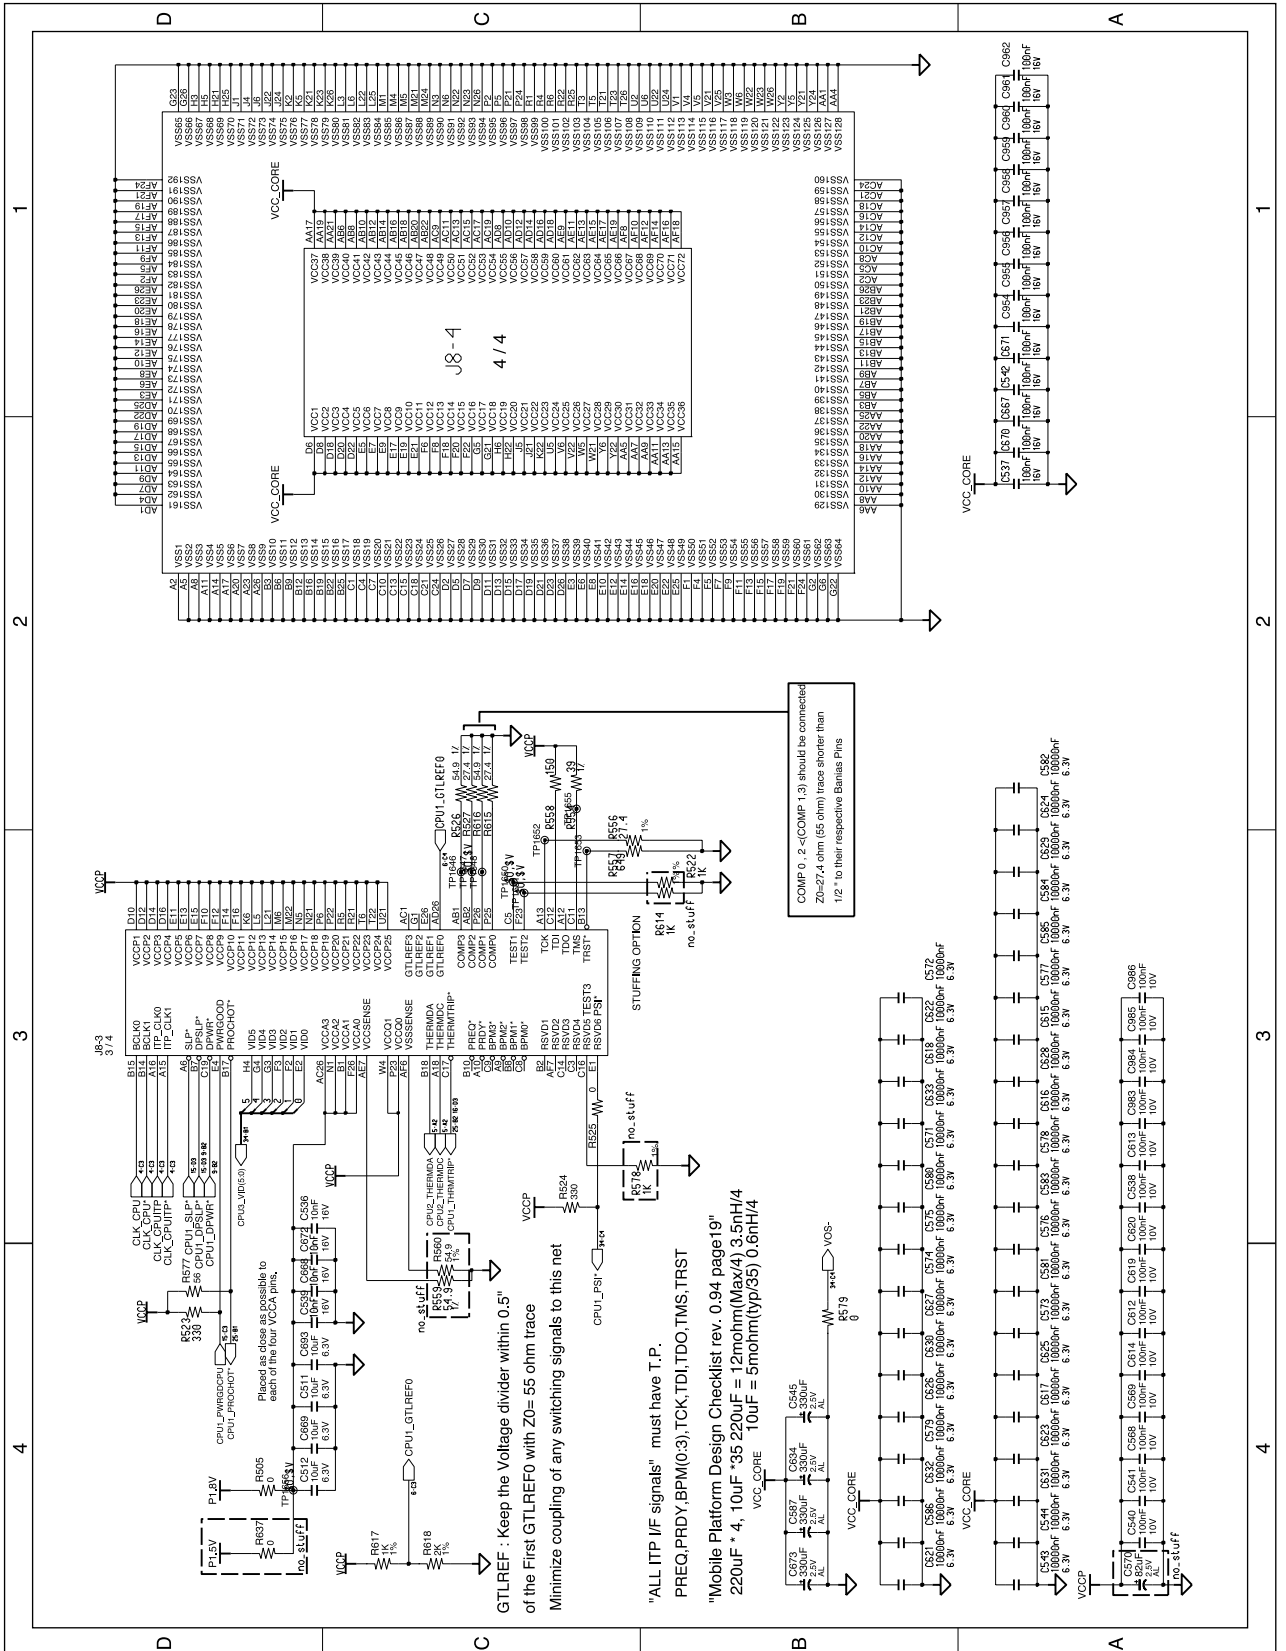

5-1-1(f) System Main Board Schematic Sheet 7 of 40(GMCH-M)

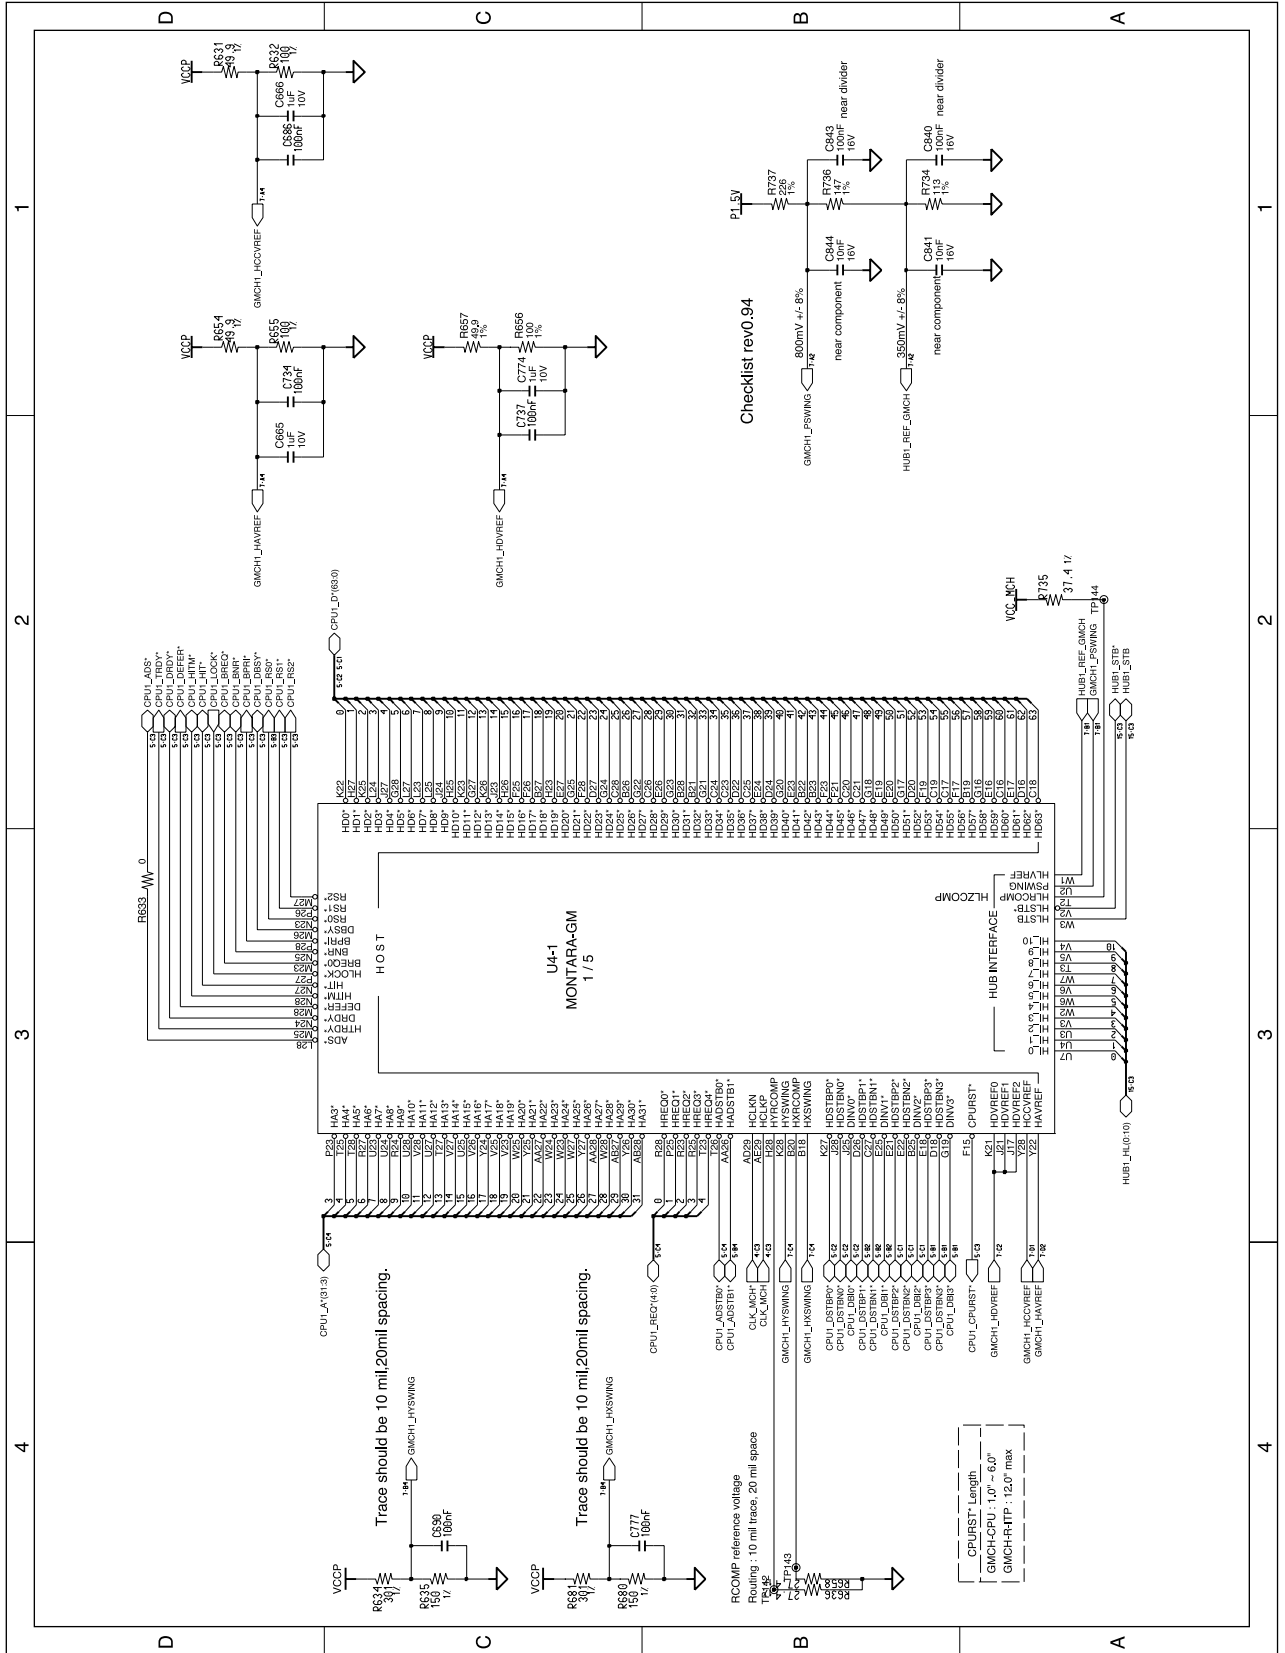


5-1-1(g) System Main Board Schematic Sheet 8 of 40(GMCH-M)

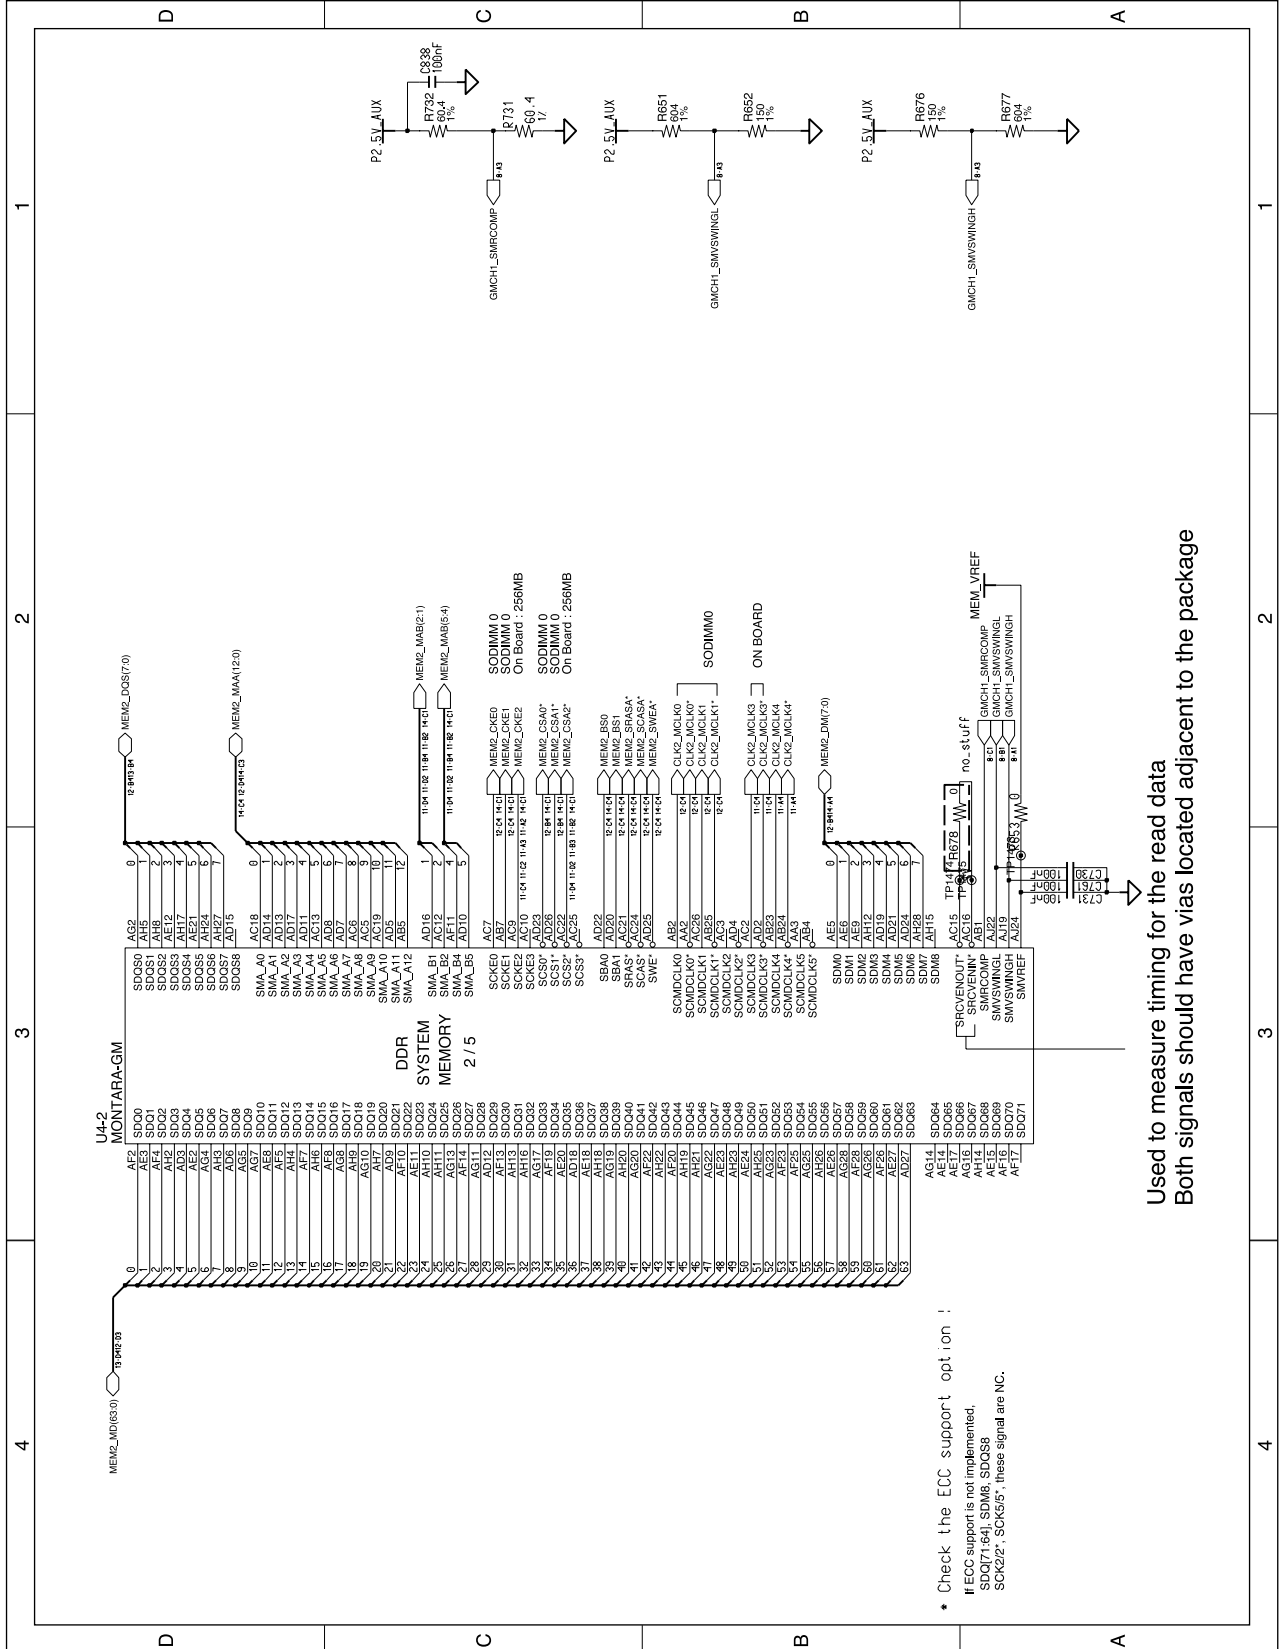


Used to measure timing for the read data
Both signals should have vias located adjacent to the package


5-1-1(h) System Main Board Schematic Sheet 9 of 40(GMCH-M)

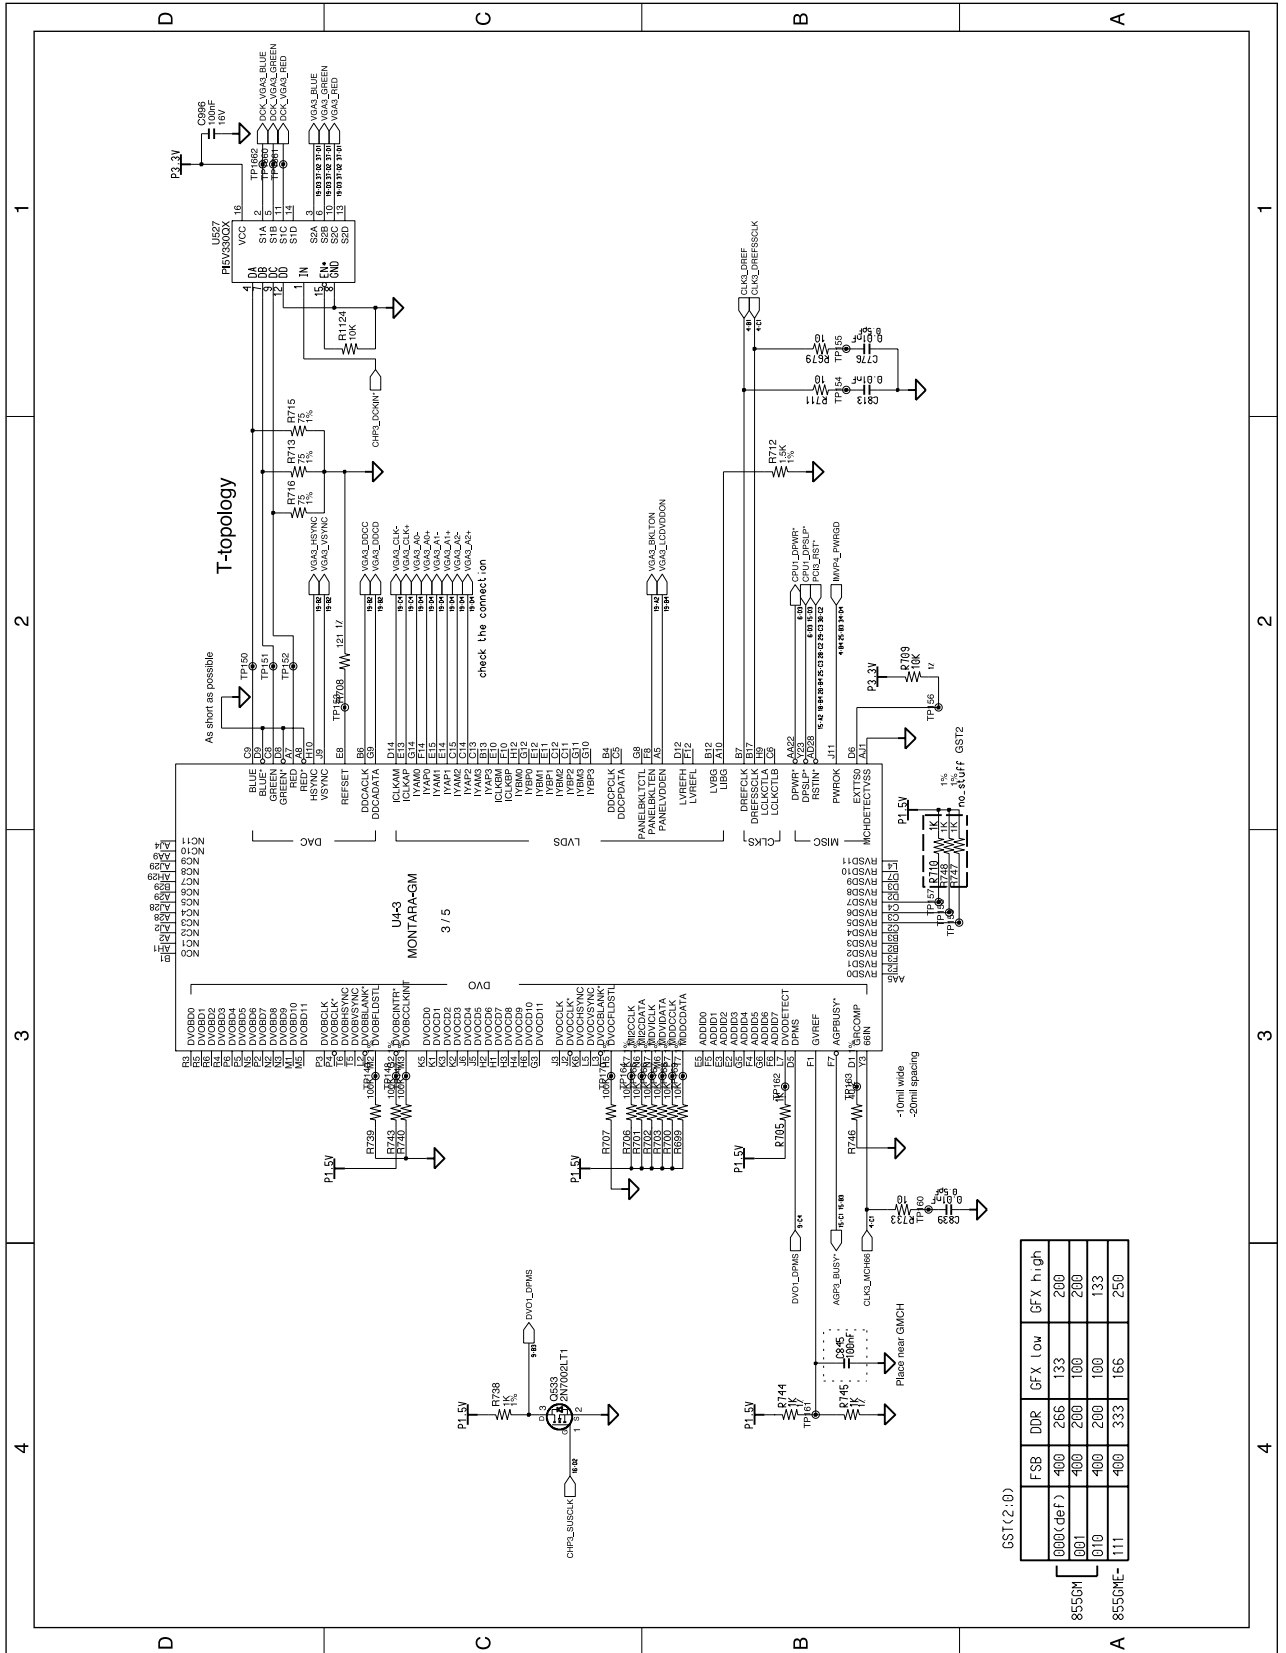

5-1-1(i) System Main Board Schematic Sheet 10 of 40(GMCH-M)

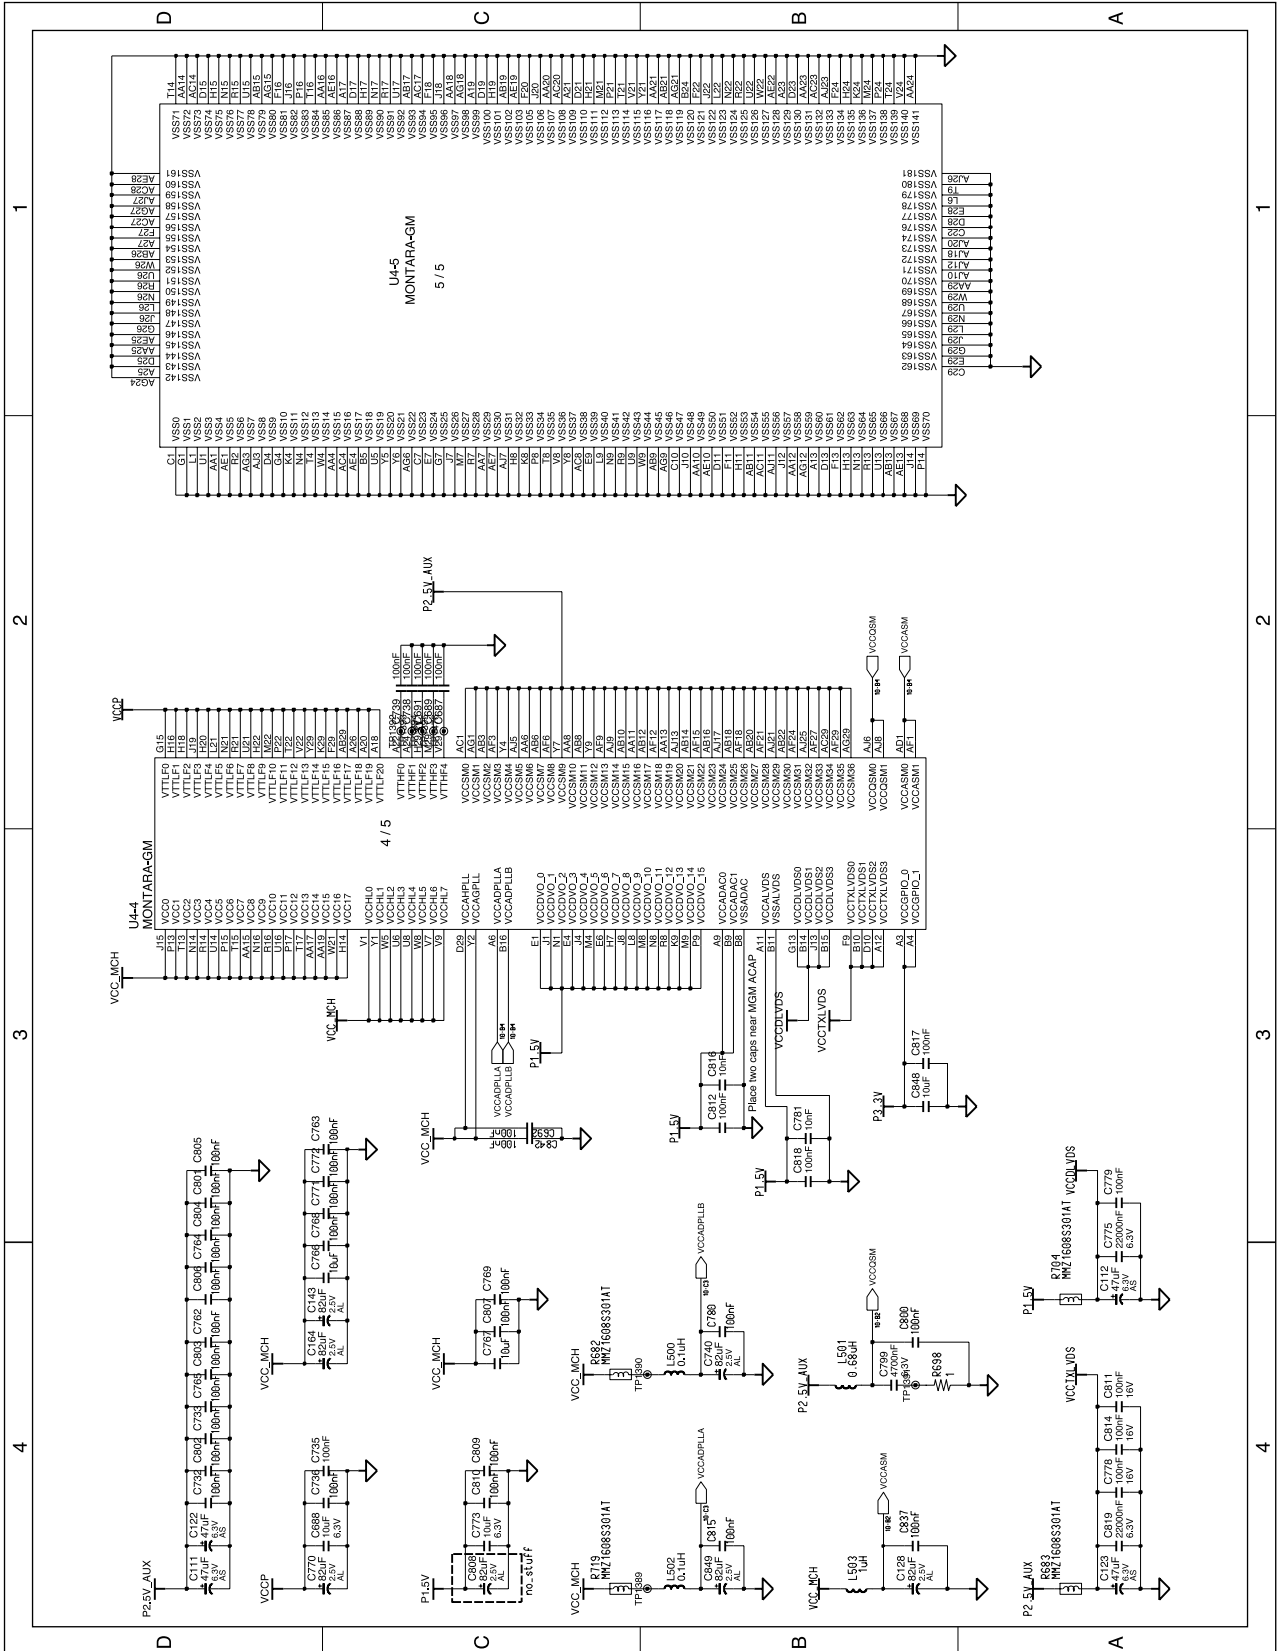


5-1-1(k) System Main Board Schematic Sheet 12 of 40(DDR-SODIMM)

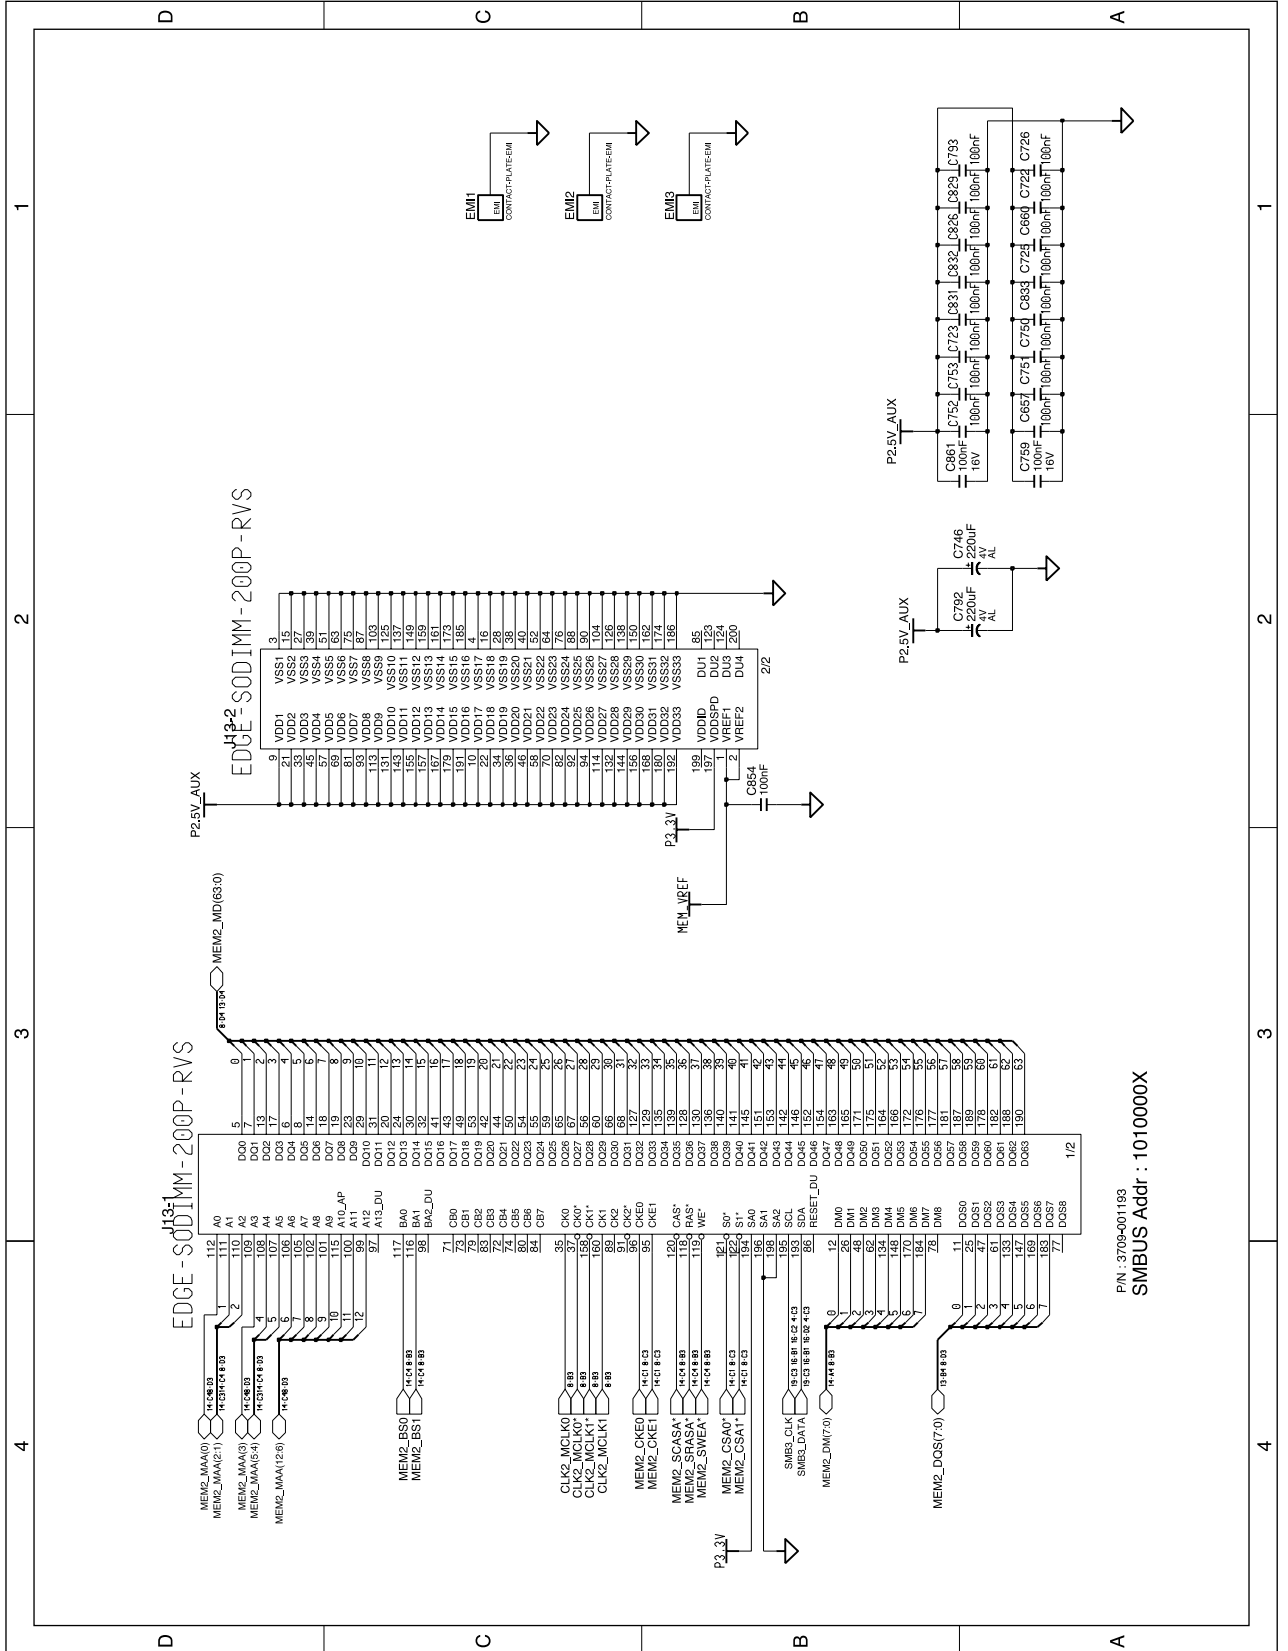


PIN : 3709-001193
SMBUS Addr : 1010000X


5-1-1(I) System Main Board Schematic Sheet 13 of 40(SERIES & TERMINATION)

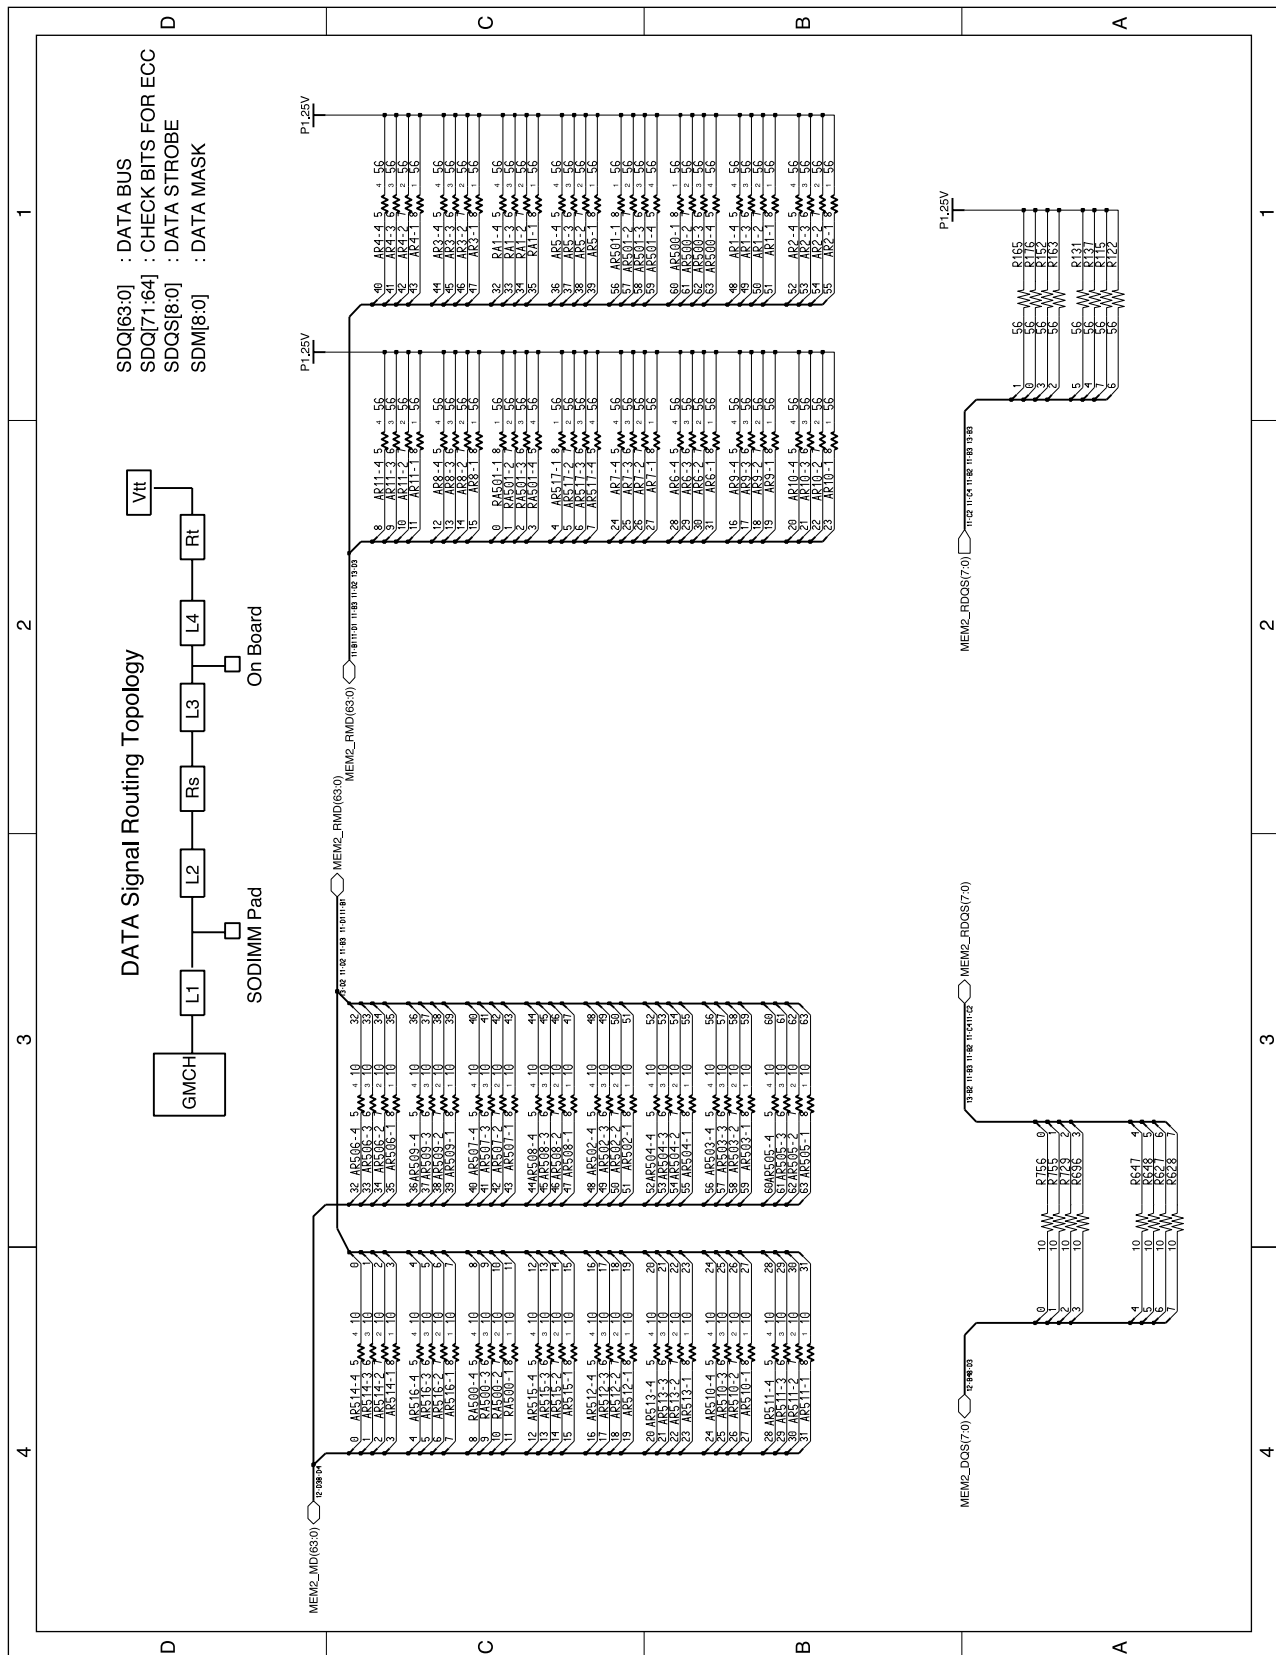


5-1-1(m) System Main Board Schematic Sheet 14 of 40(SERISE & TERMINATION)

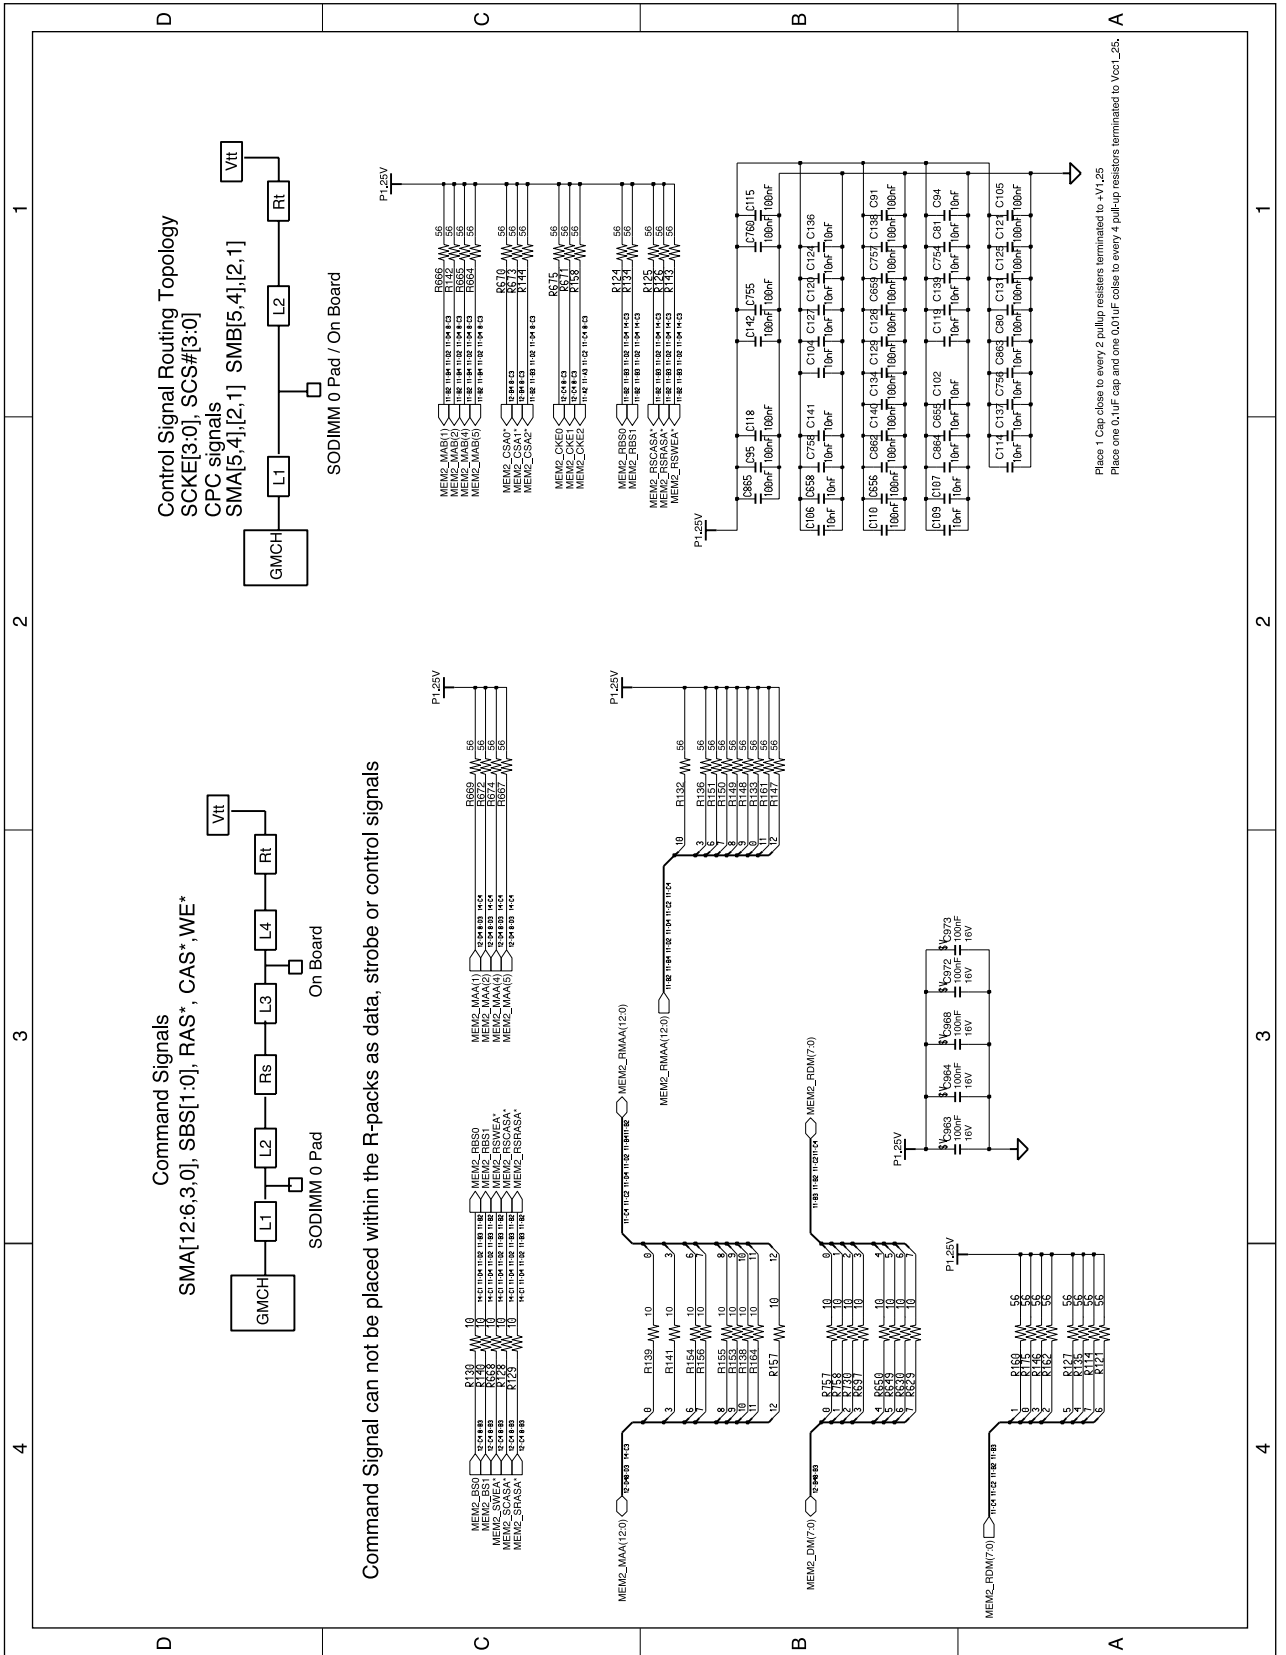

5-1-1(o) System Main Board Schematic Sheet 16 of 40(ICH4-M)

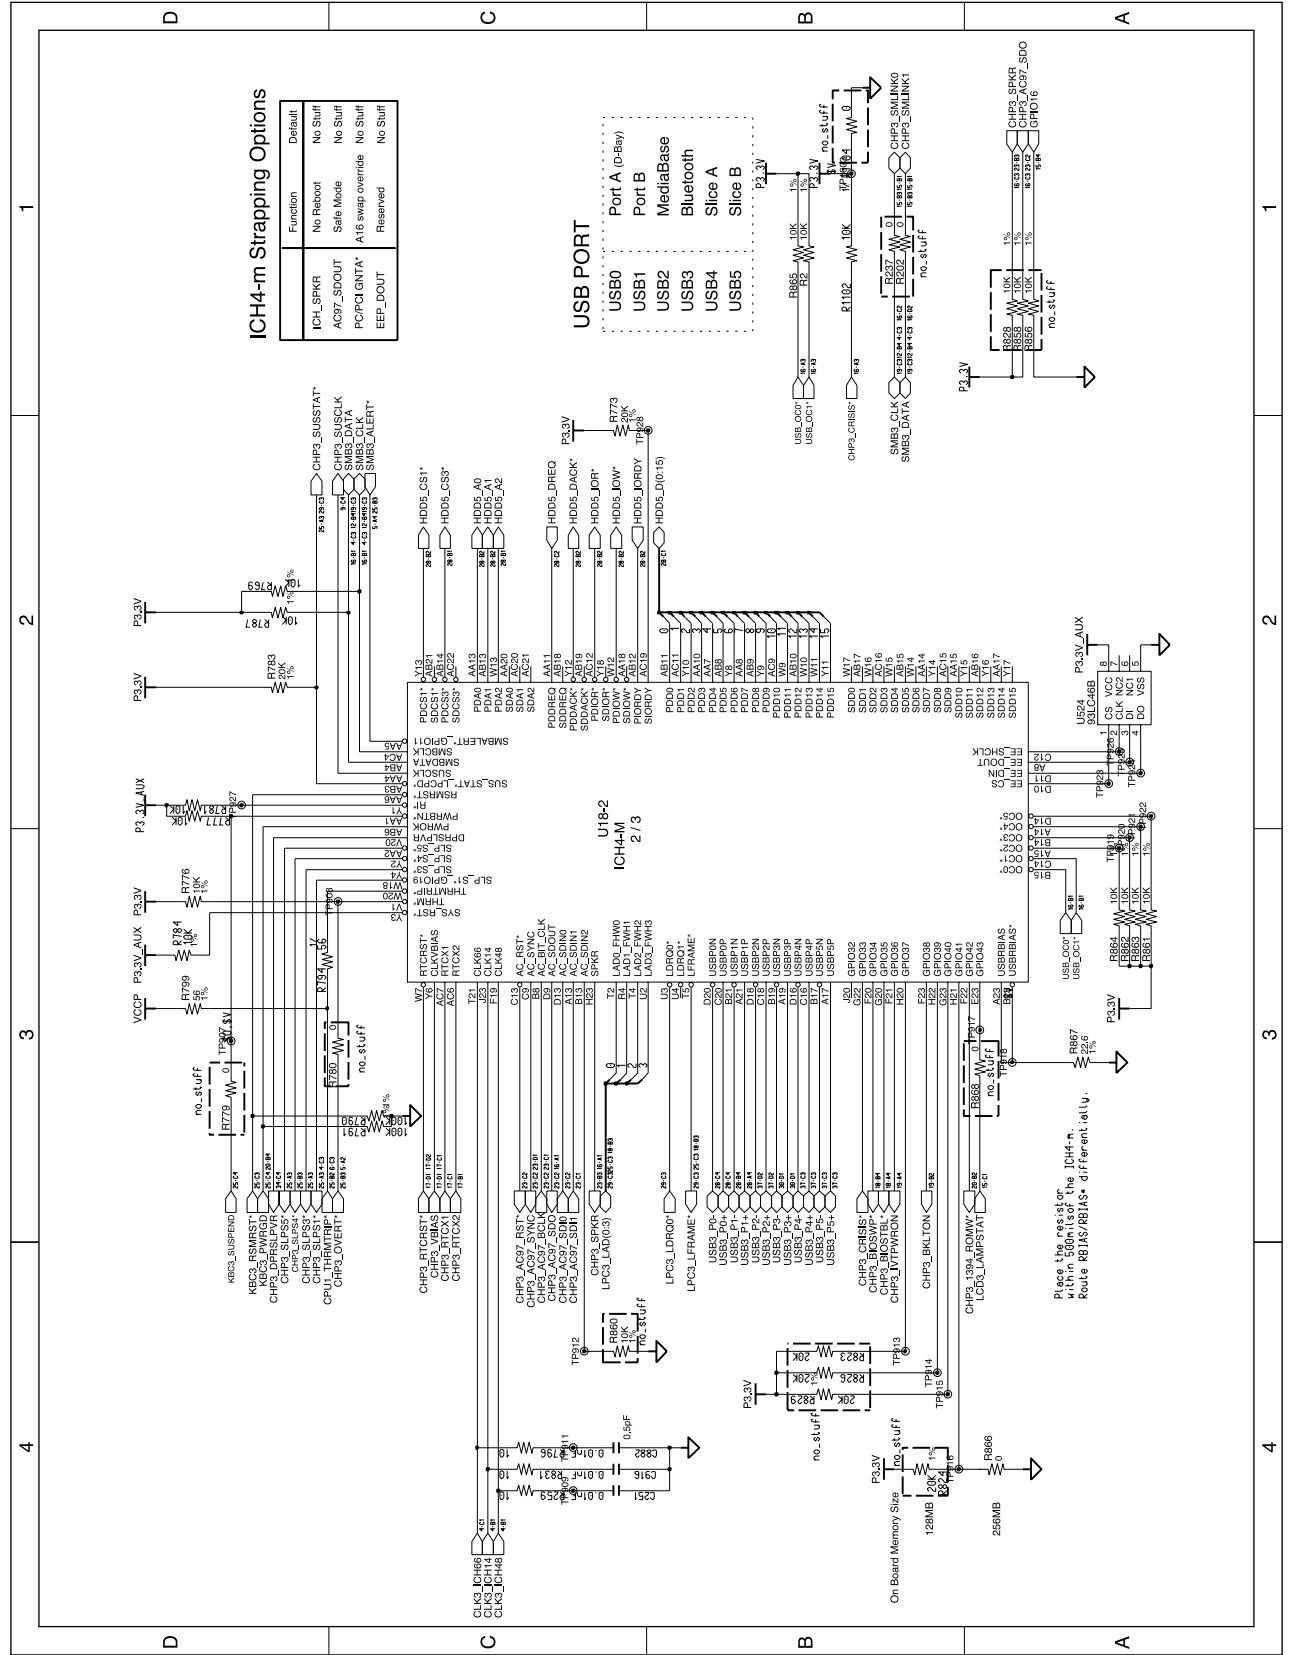


5-1-1(p) System Main Board Schematic Sheet 17 of 40(ICH4-M)

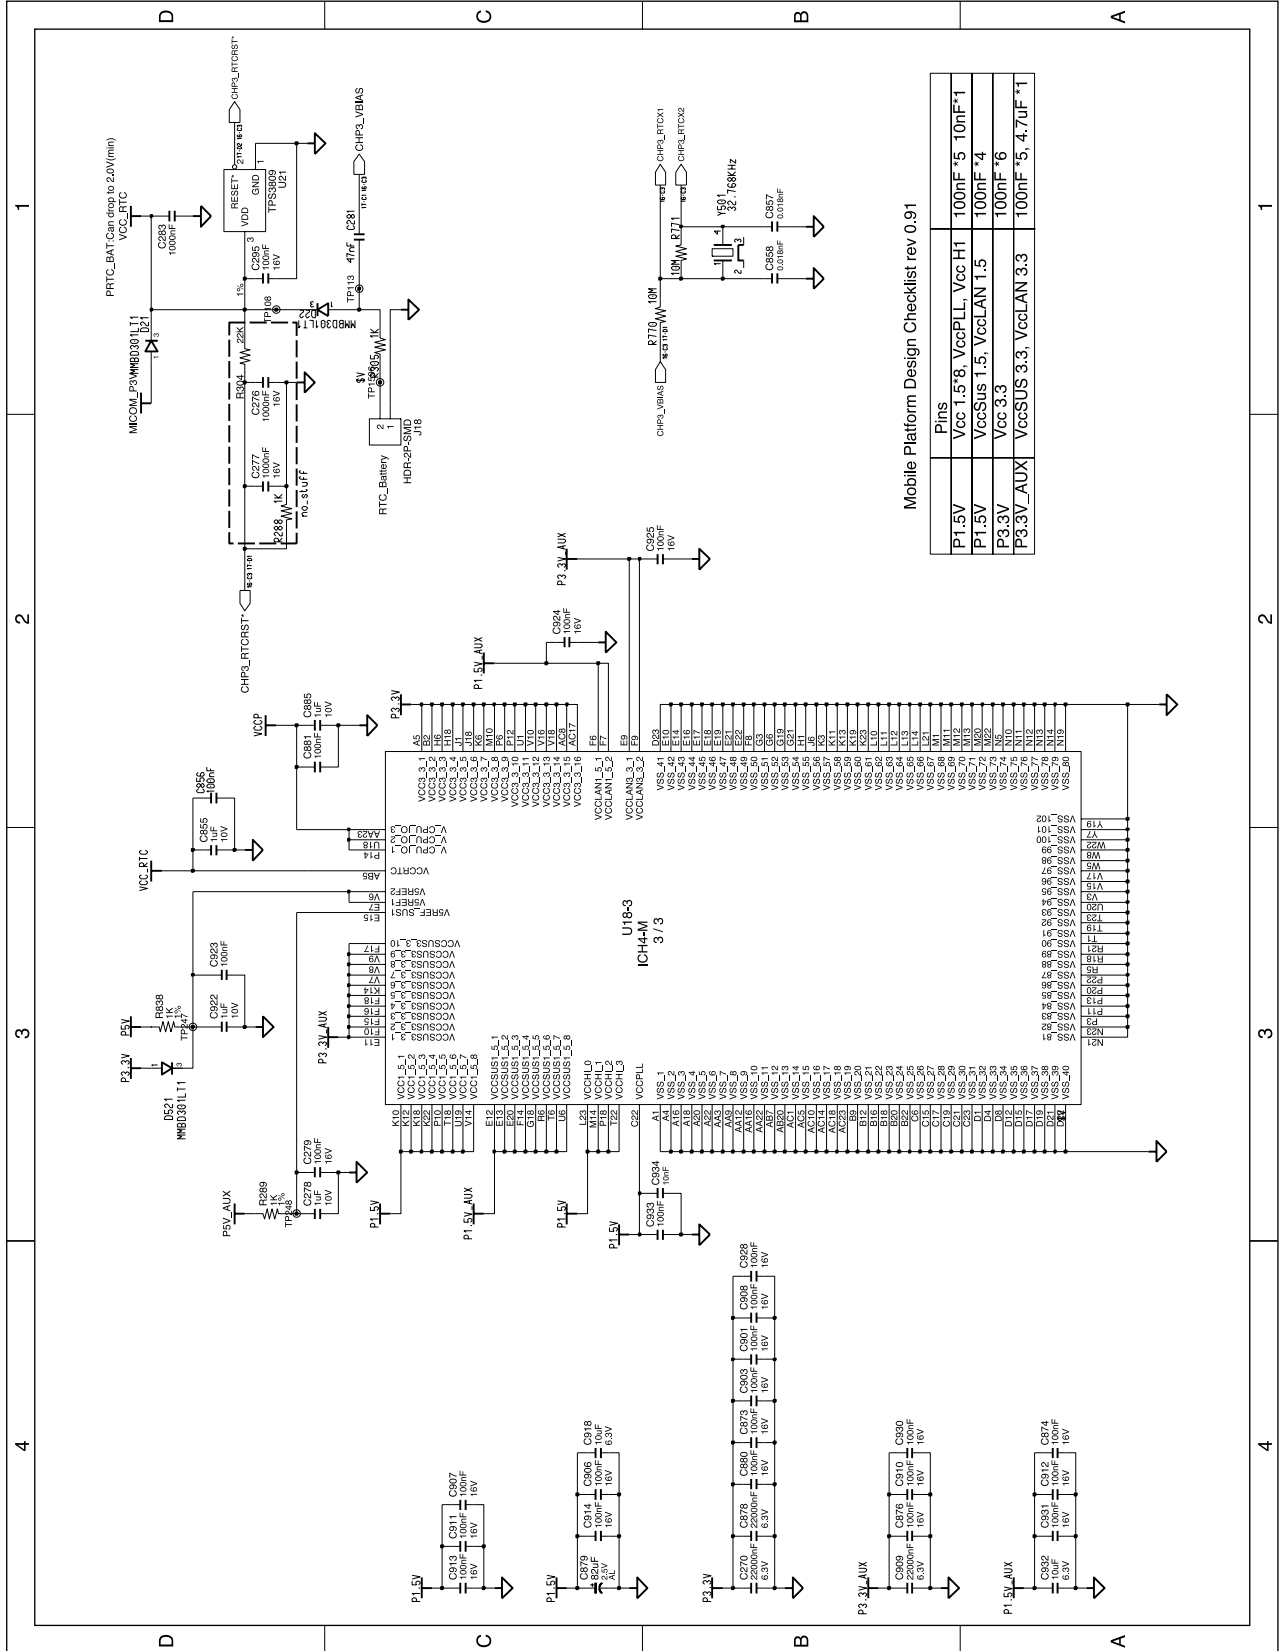


Mobile Platform Design Checklist rev 0.91

Pins	Values
P1_5V	Vcc 1.5V, VccPLL, Vcc H1 100nF *5, 10nF *1
P1_5V	VccSus 1.5, VccLAN 1.5 100nF *4
P3_3V	Vcc 3.3 100nF *6
P3_3V_AUX	VccSUS 3.3, VccLAN 3.3 100nF *5, 4.7uF *1


5-1-1(q) System Main Board Schematic Sheet 18 of 40(FWH)

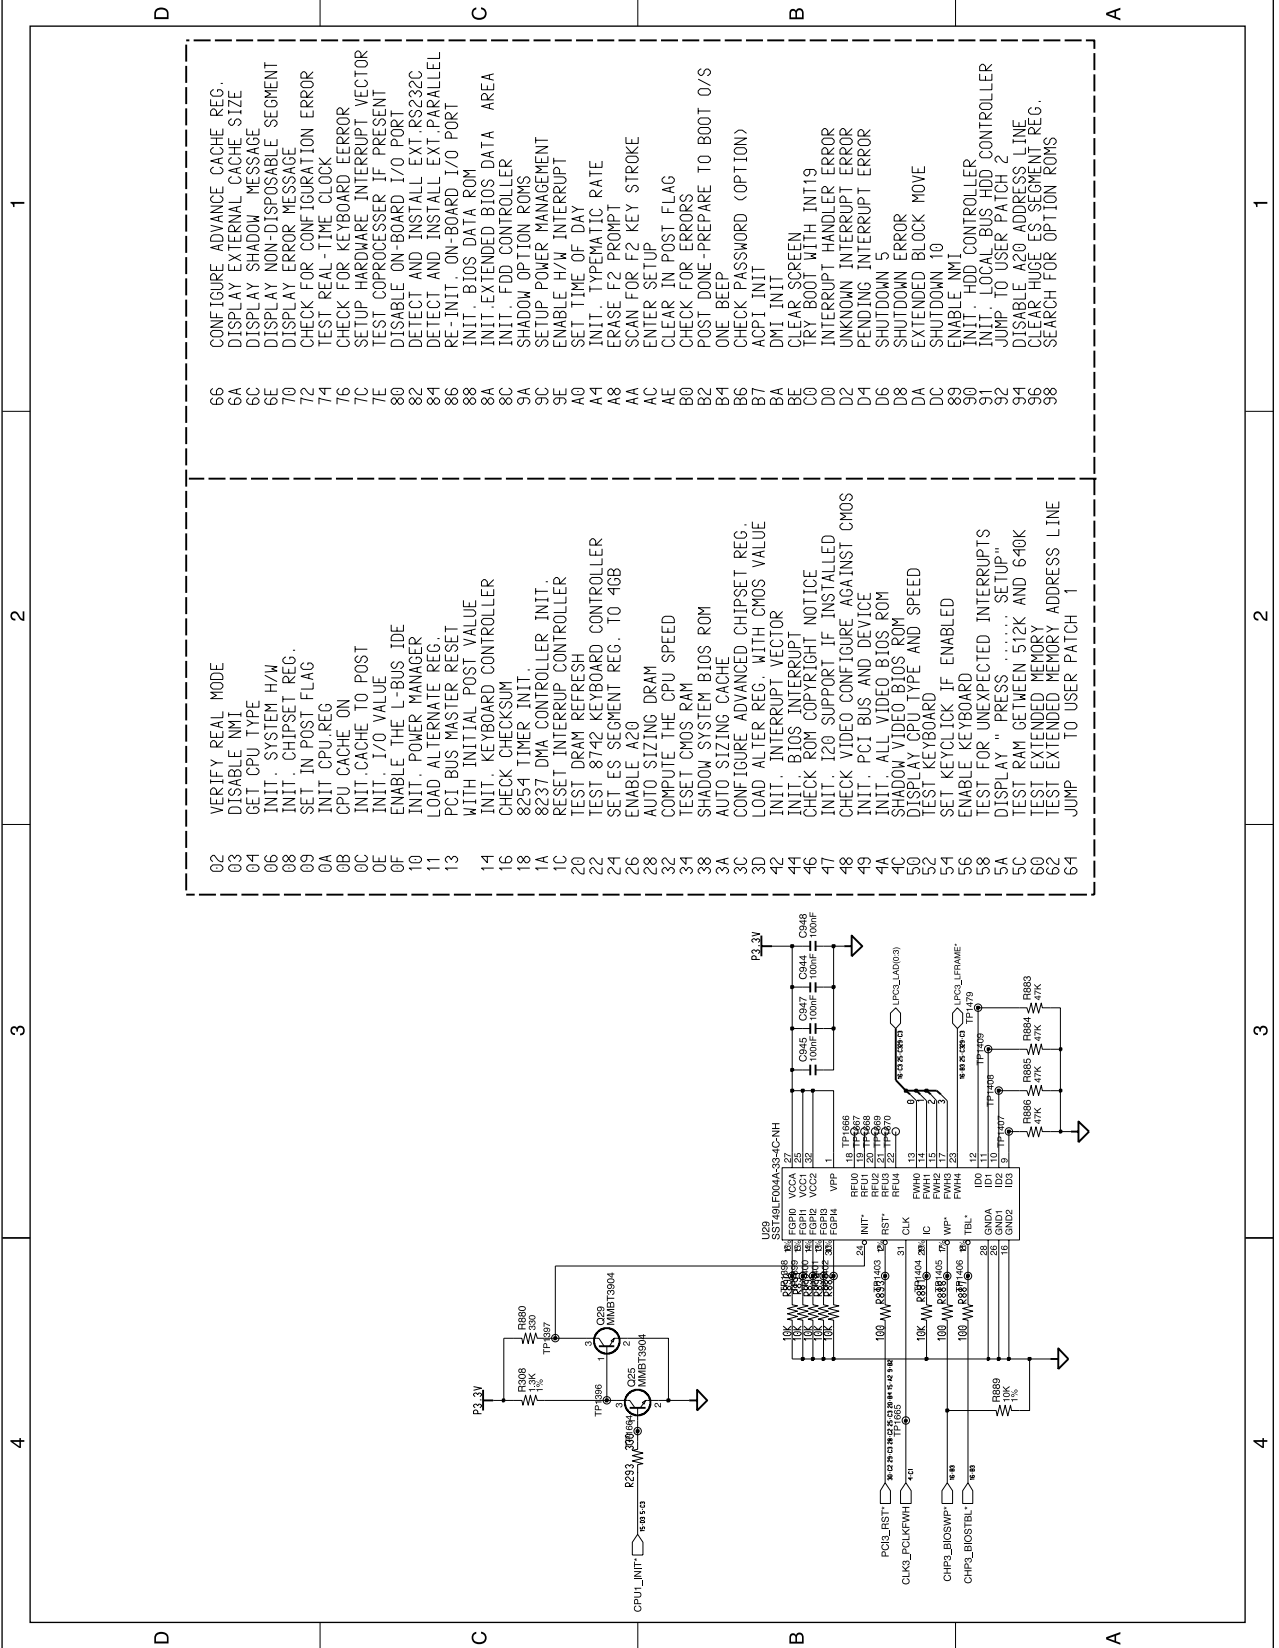


5-1-1(r) System Main Board Schematic Sheet 19 of 40(LCD INTERFACE)

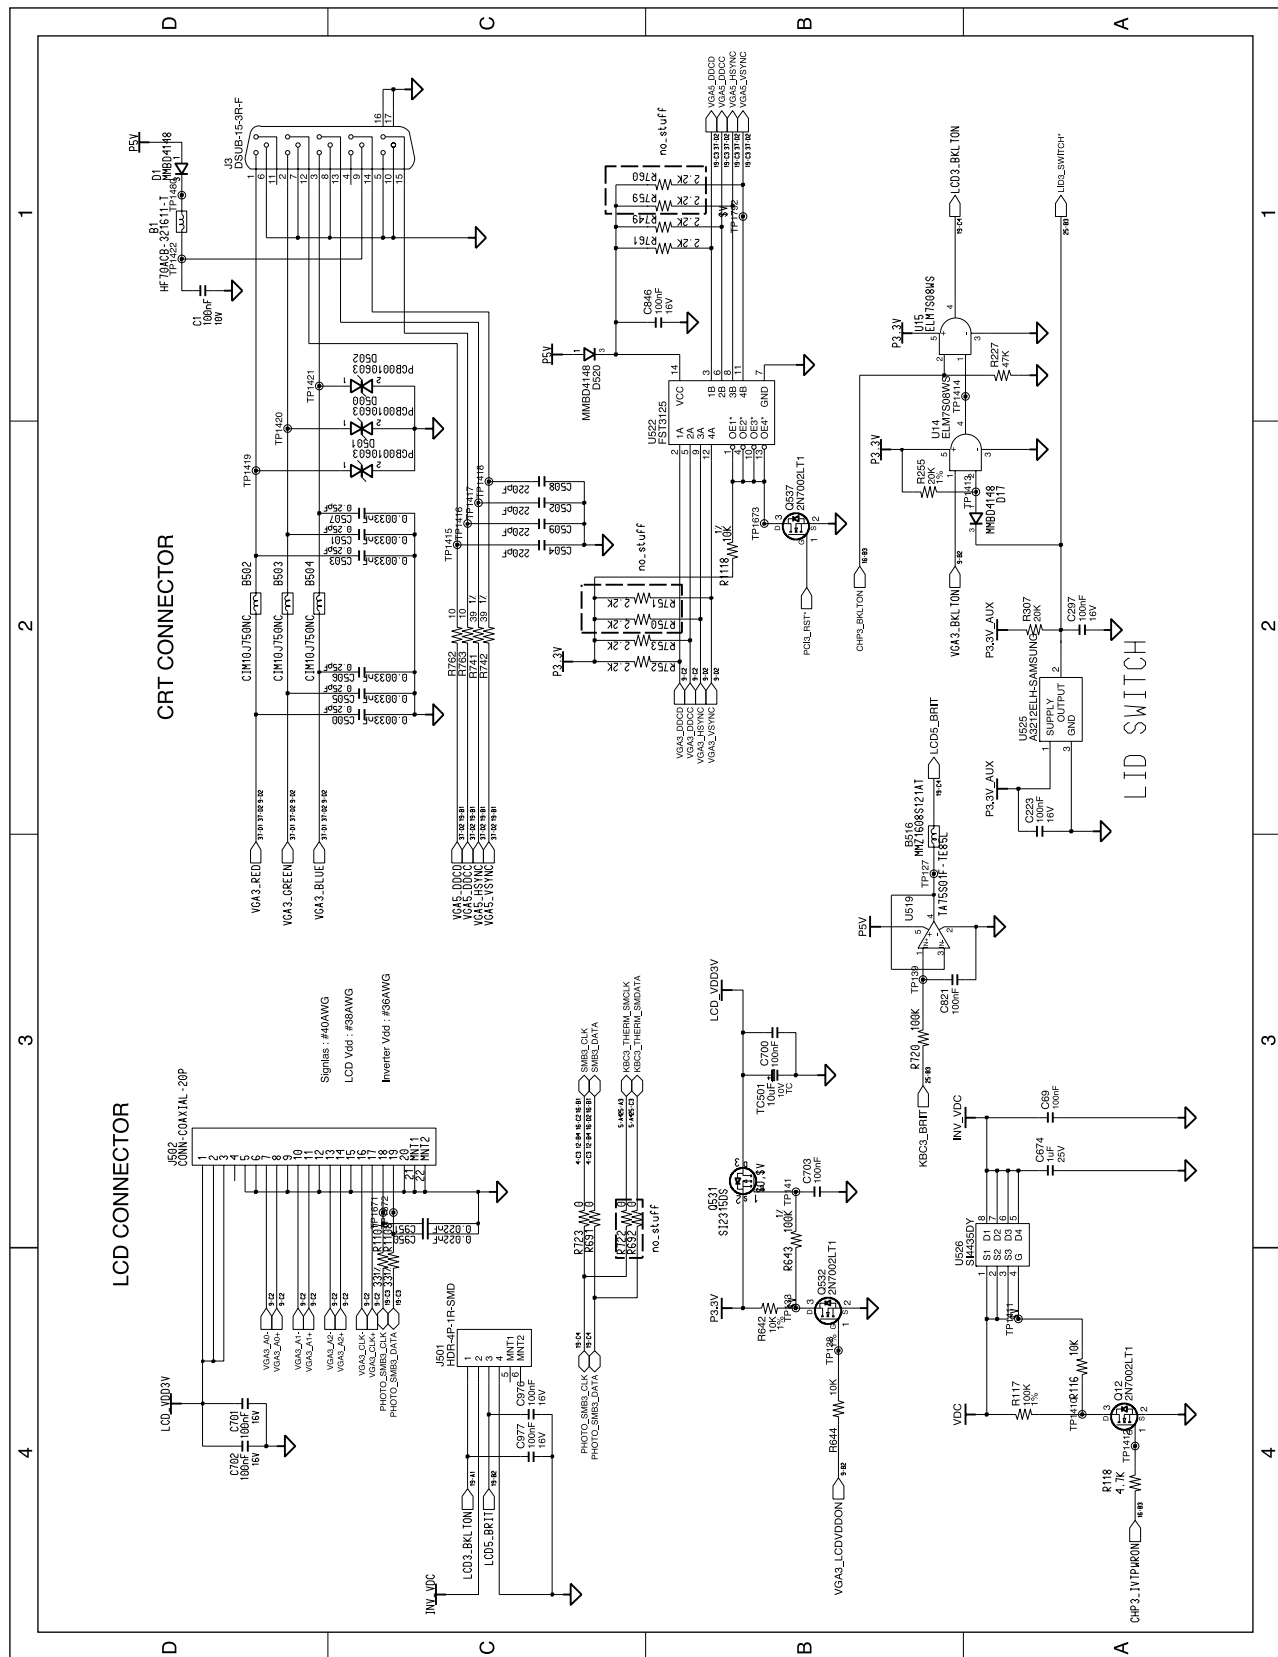

5-1-1(s) System Main Board Schematic Sheet 20 of 40(CARDBUS & 1394)

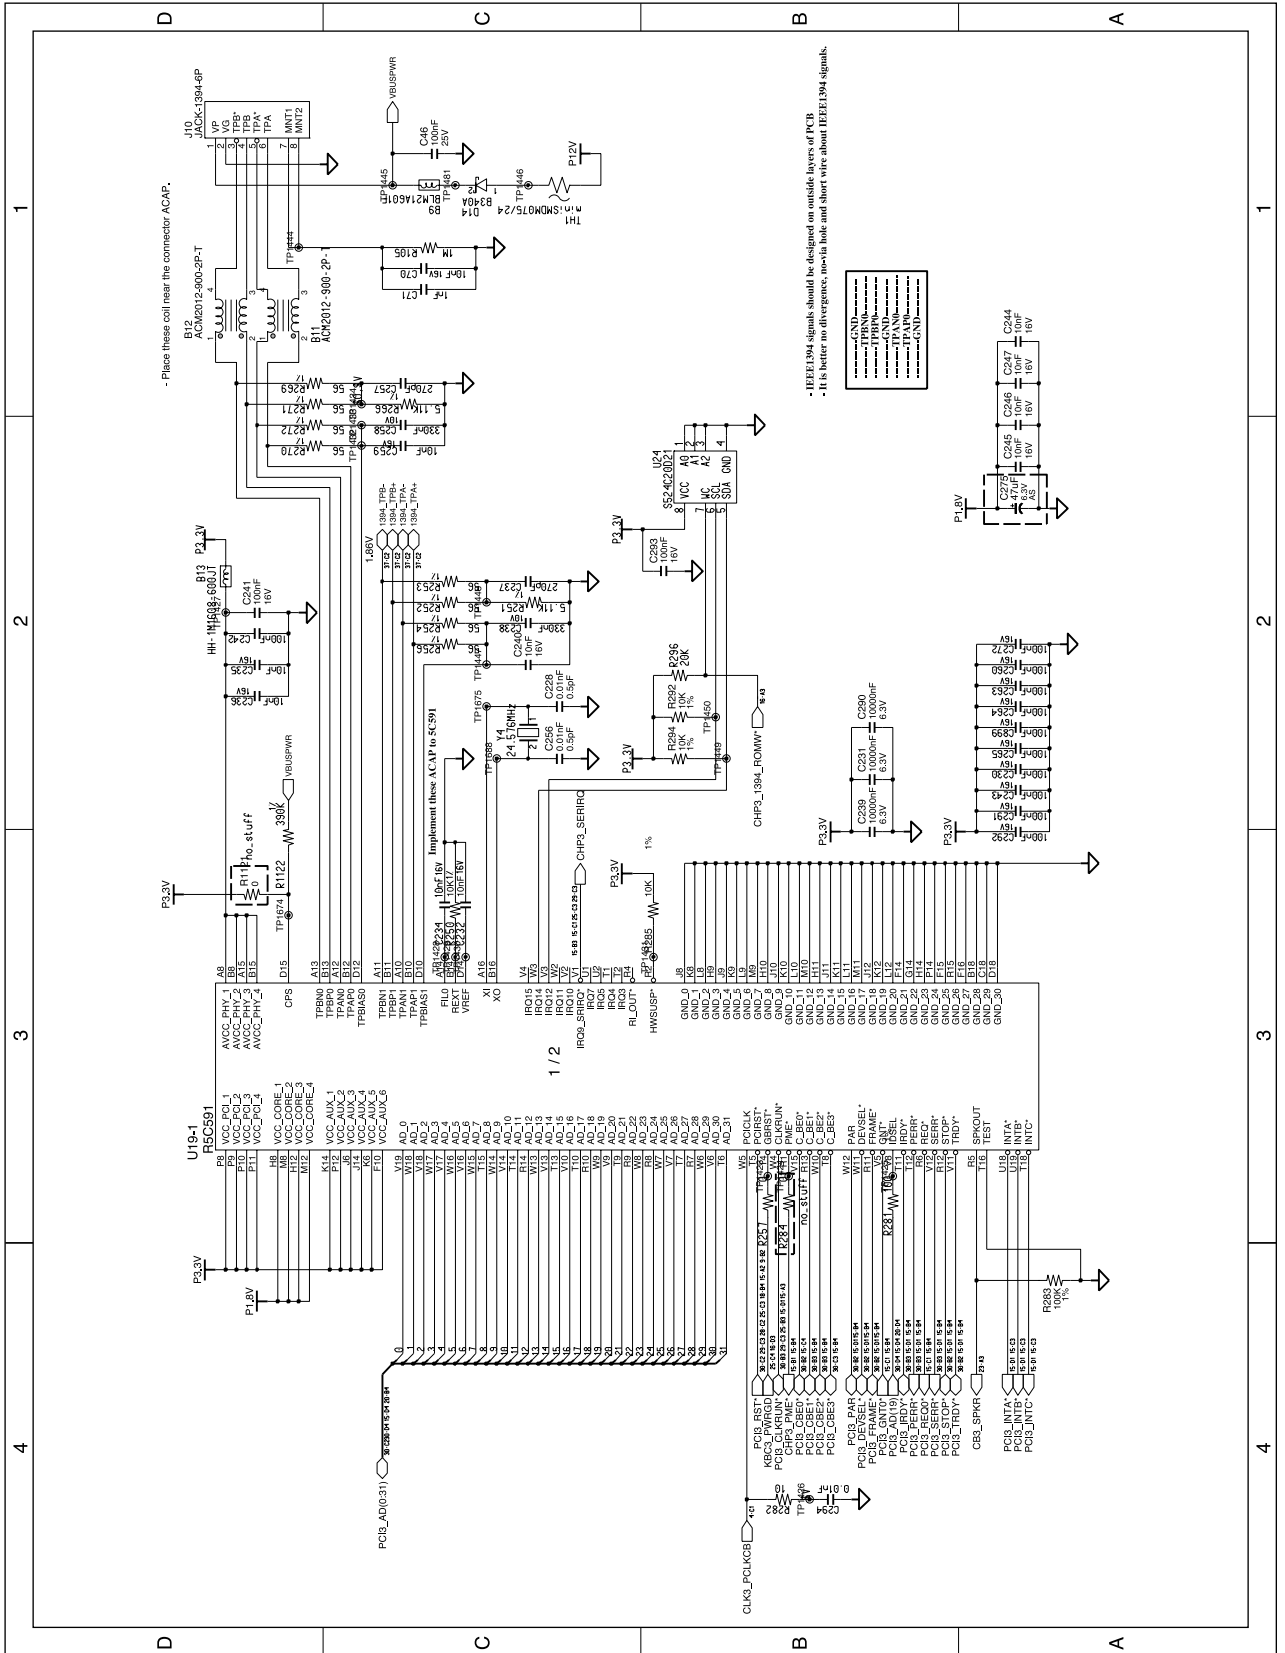


5-1-1(t) System Main Board Schematic Sheet 21 of 40(CARDBUS & 1394)

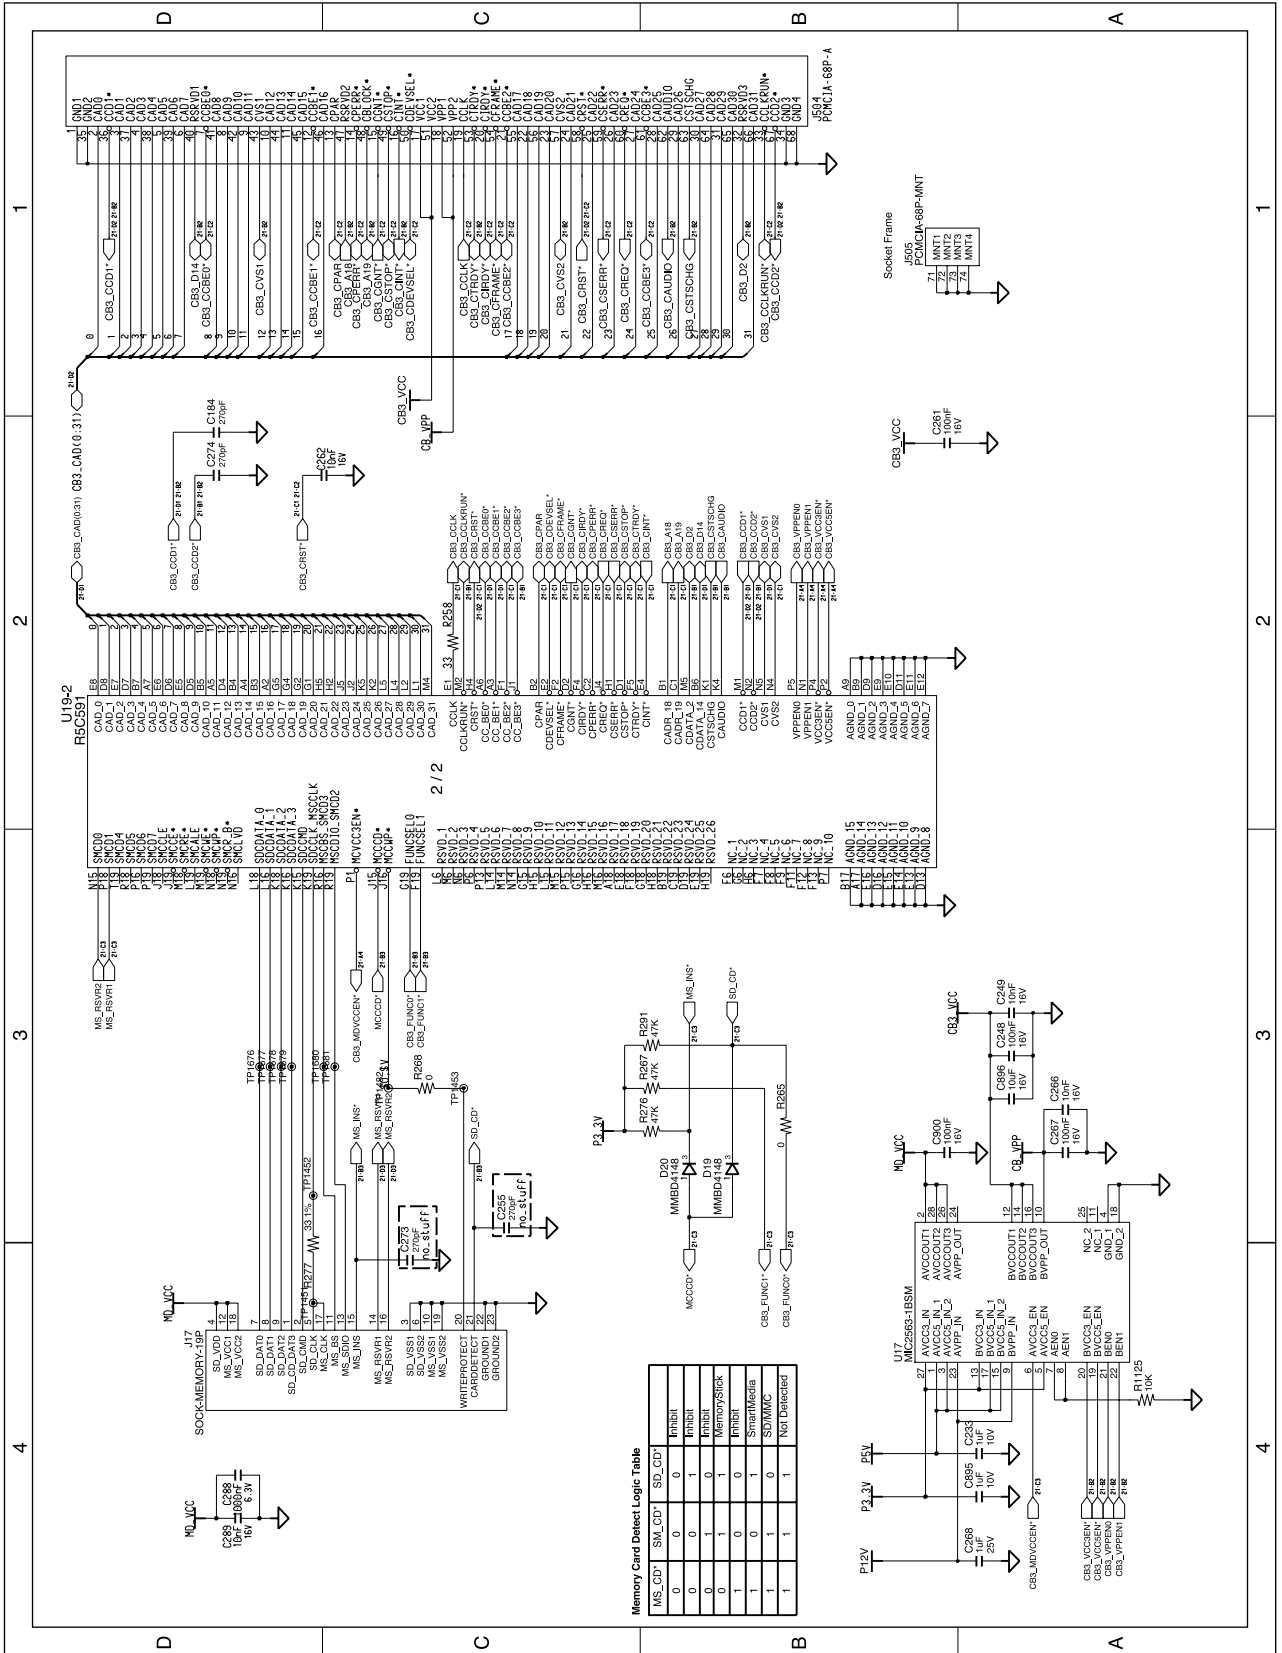


Memory Card Detect Logic Table

MS_CD0	SM_CD0	SD_CD0	Inhibit
0	0	0	Inhibit
0	0	1	Inhibit
0	1	0	Inhibit
0	1	1	Inhibit
1	0	0	Inhibit
1	0	1	SmartMedia
1	1	0	SD/MMC
1	1	1	Not Detected


5-1-1(u) System Main Board Schematic Sheet 22 of 40(LOW [BCM5705M])

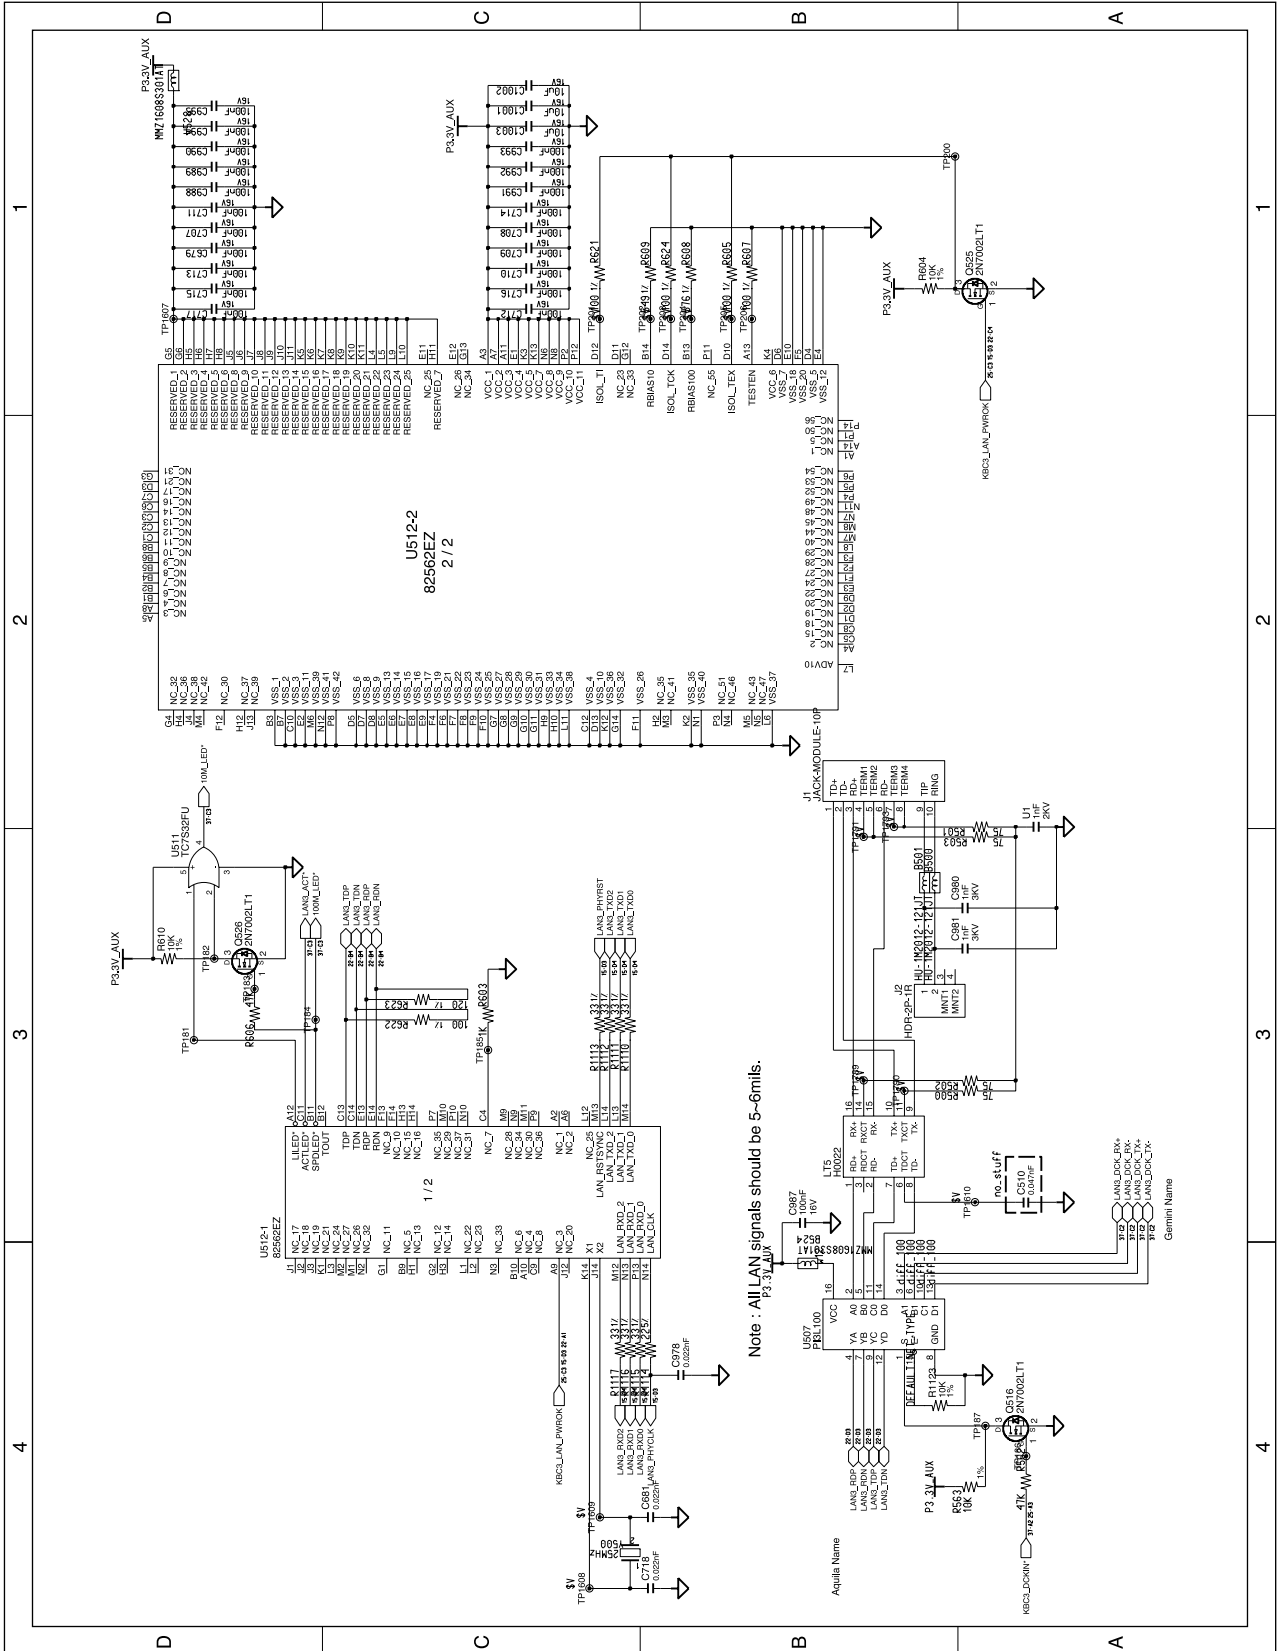


5-1-1(v) System Main Board Schematic Sheet 23 of 40(LOW [BCM5705M])

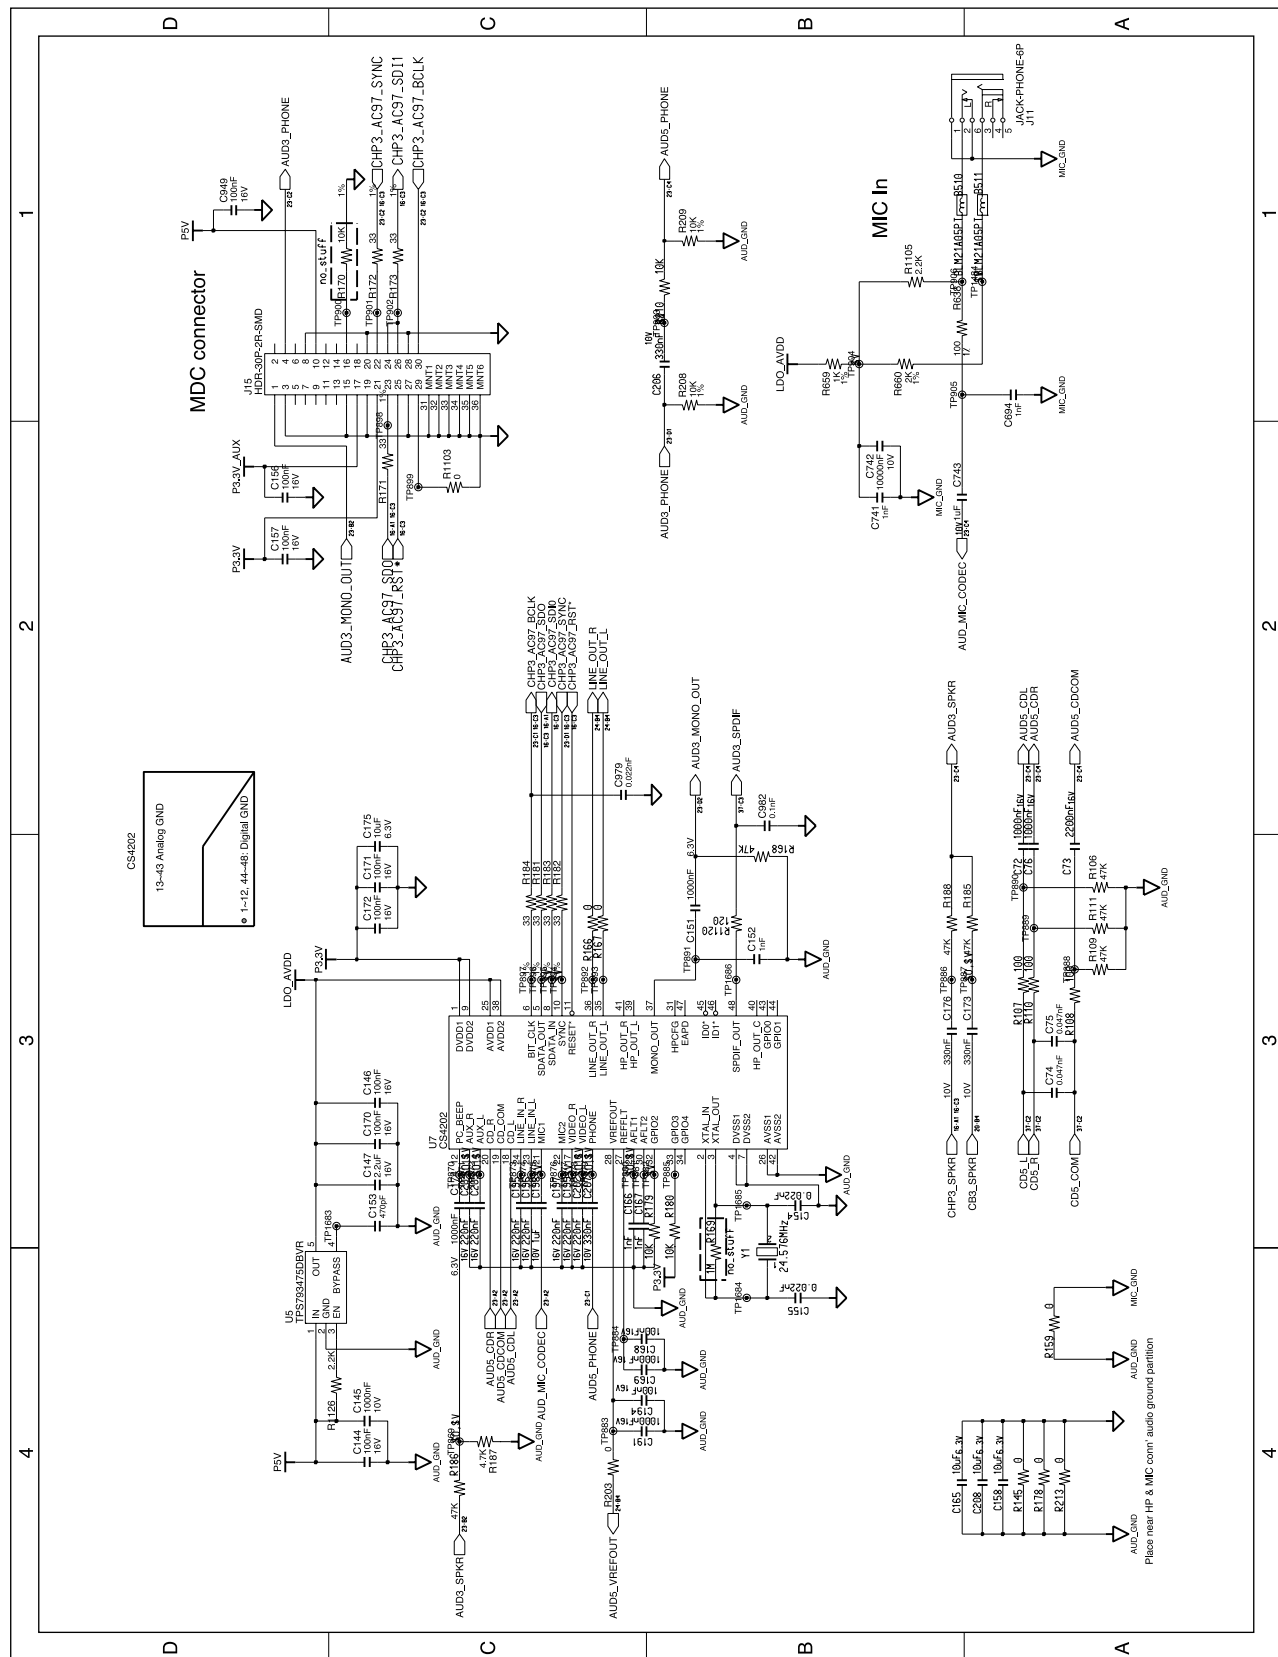


5-1-1(w) System Main Board Schematic Sheet 24 of 40(AUDIO)

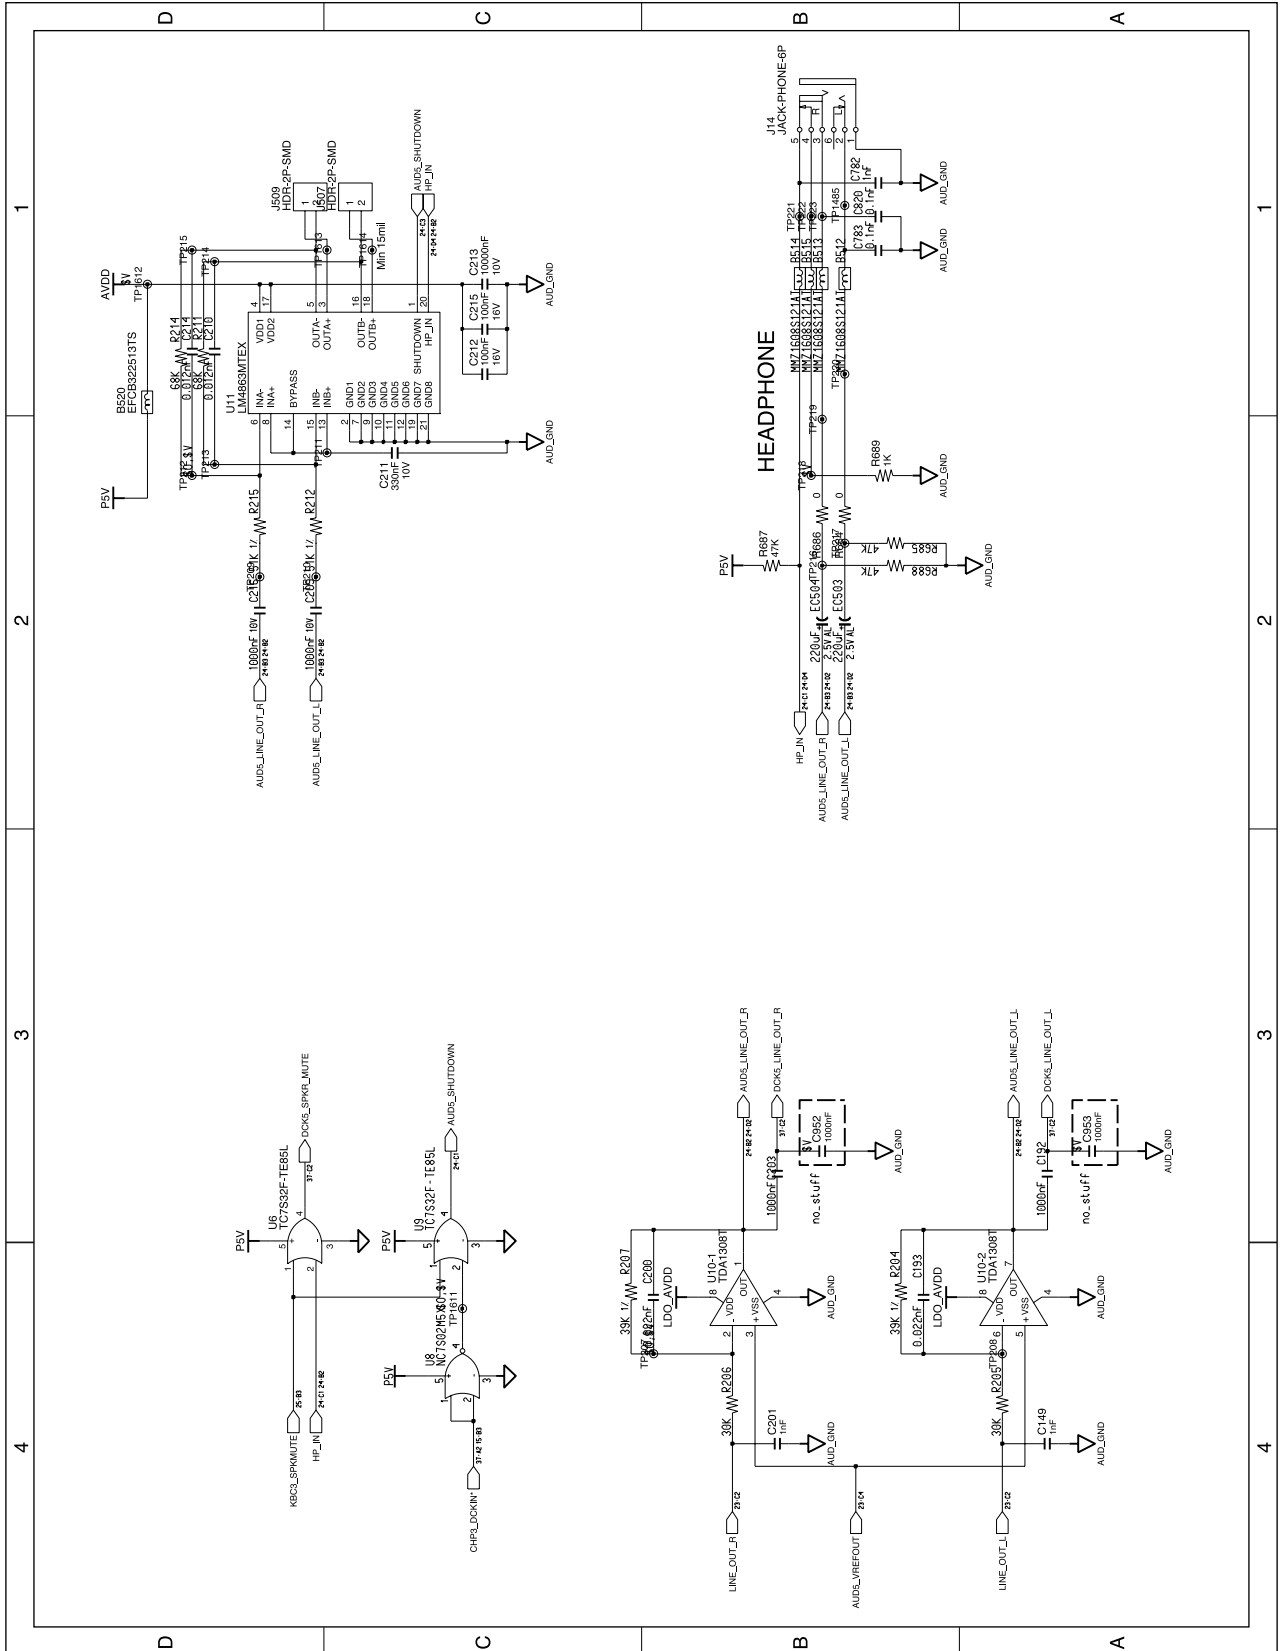


5-1-1(x) System Main Board Schematic Sheet 25 of 40(MICOM)

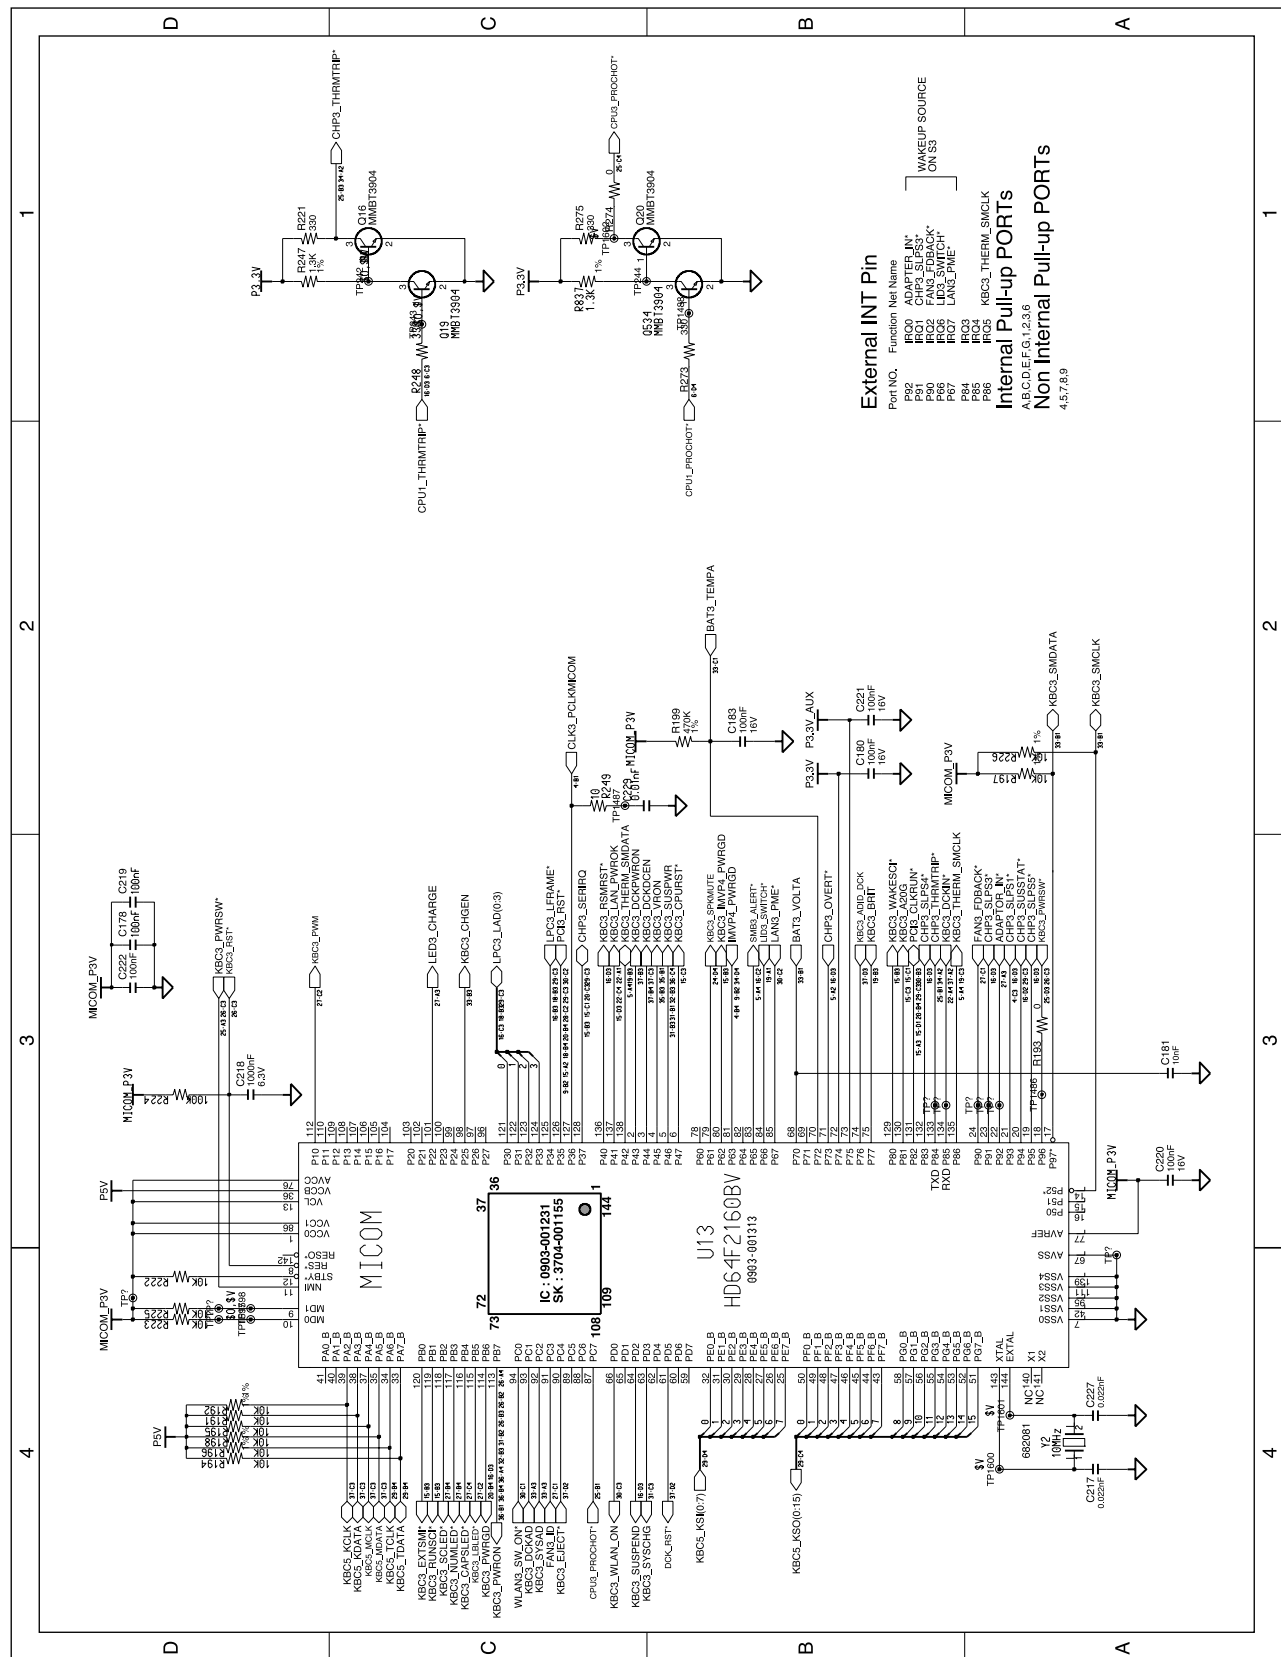


5-1-1(y) System Main Board Schematic Sheet 26 of 40(MICOM POWER, POWER SWITCH)

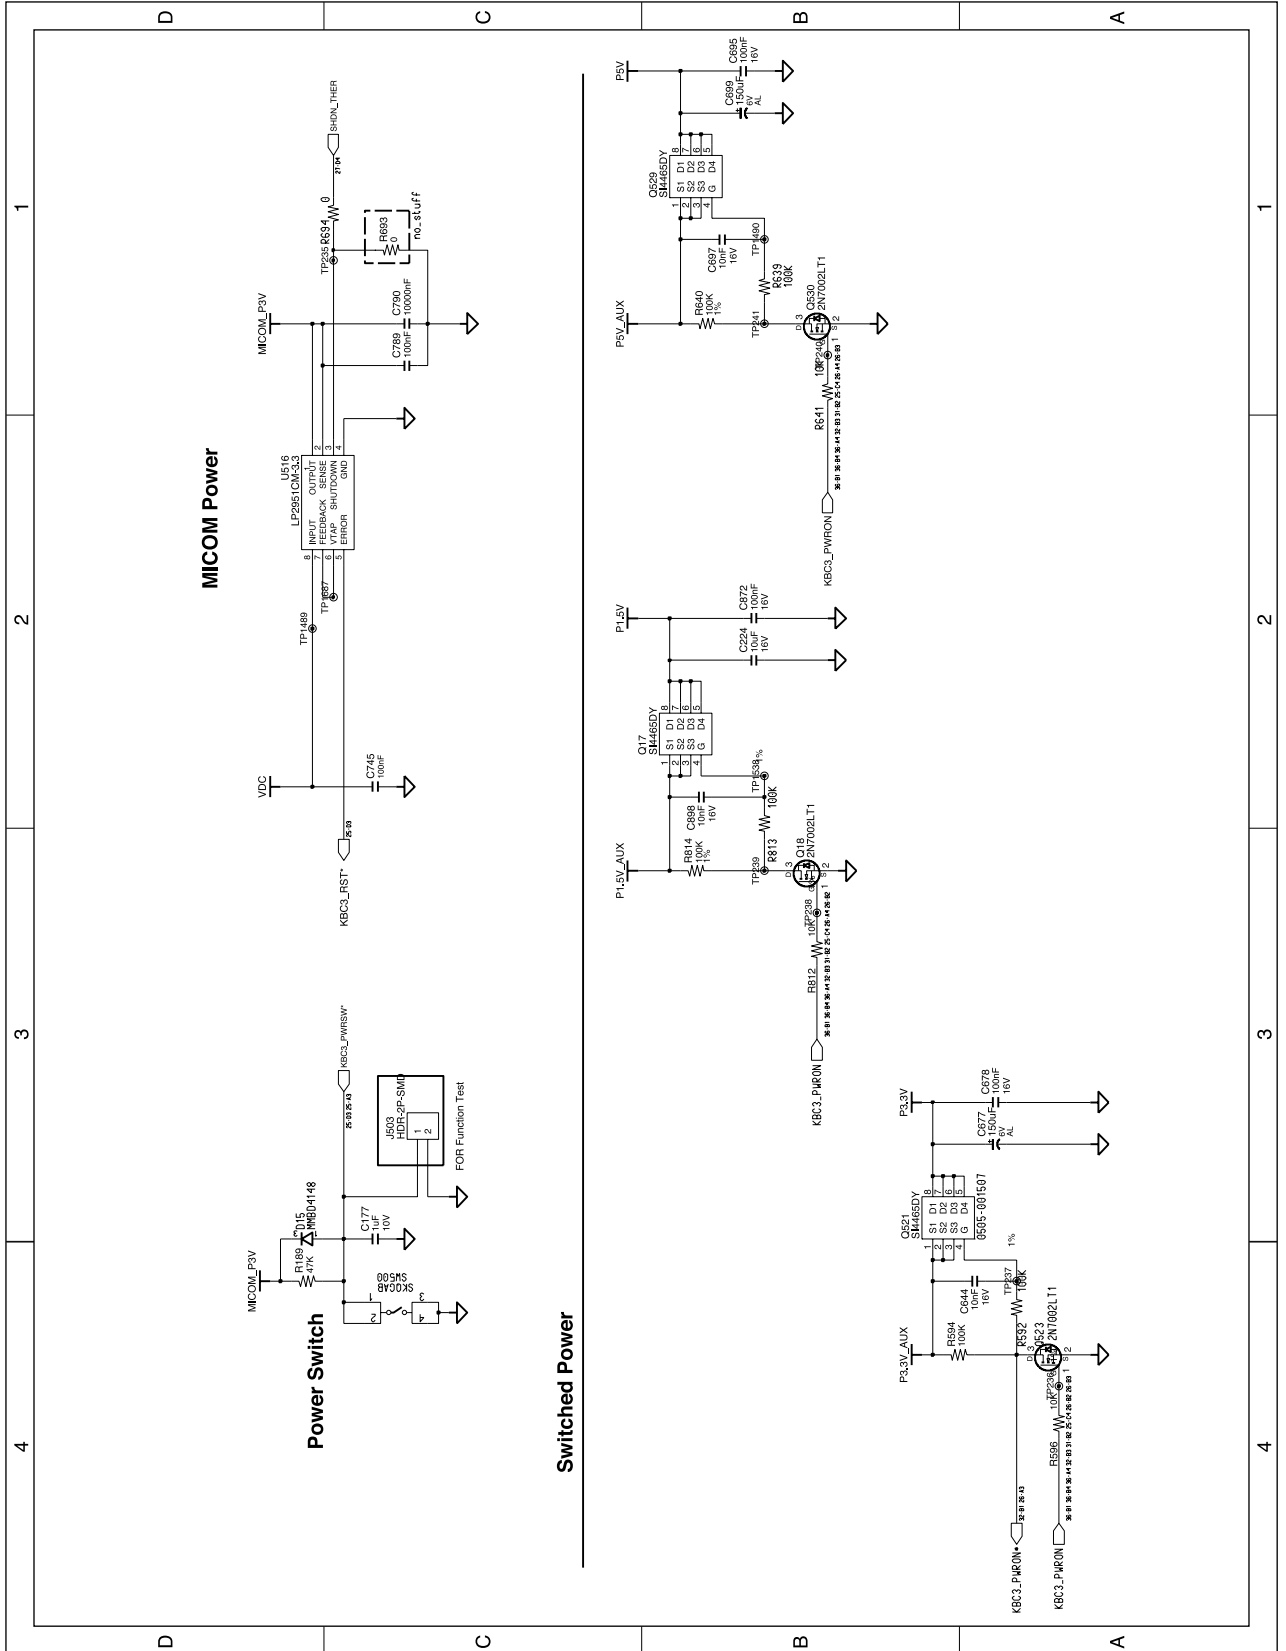


5-1-1(z) System Main Board Schematic Sheet 27 of 40(THERMAL SENSOR)

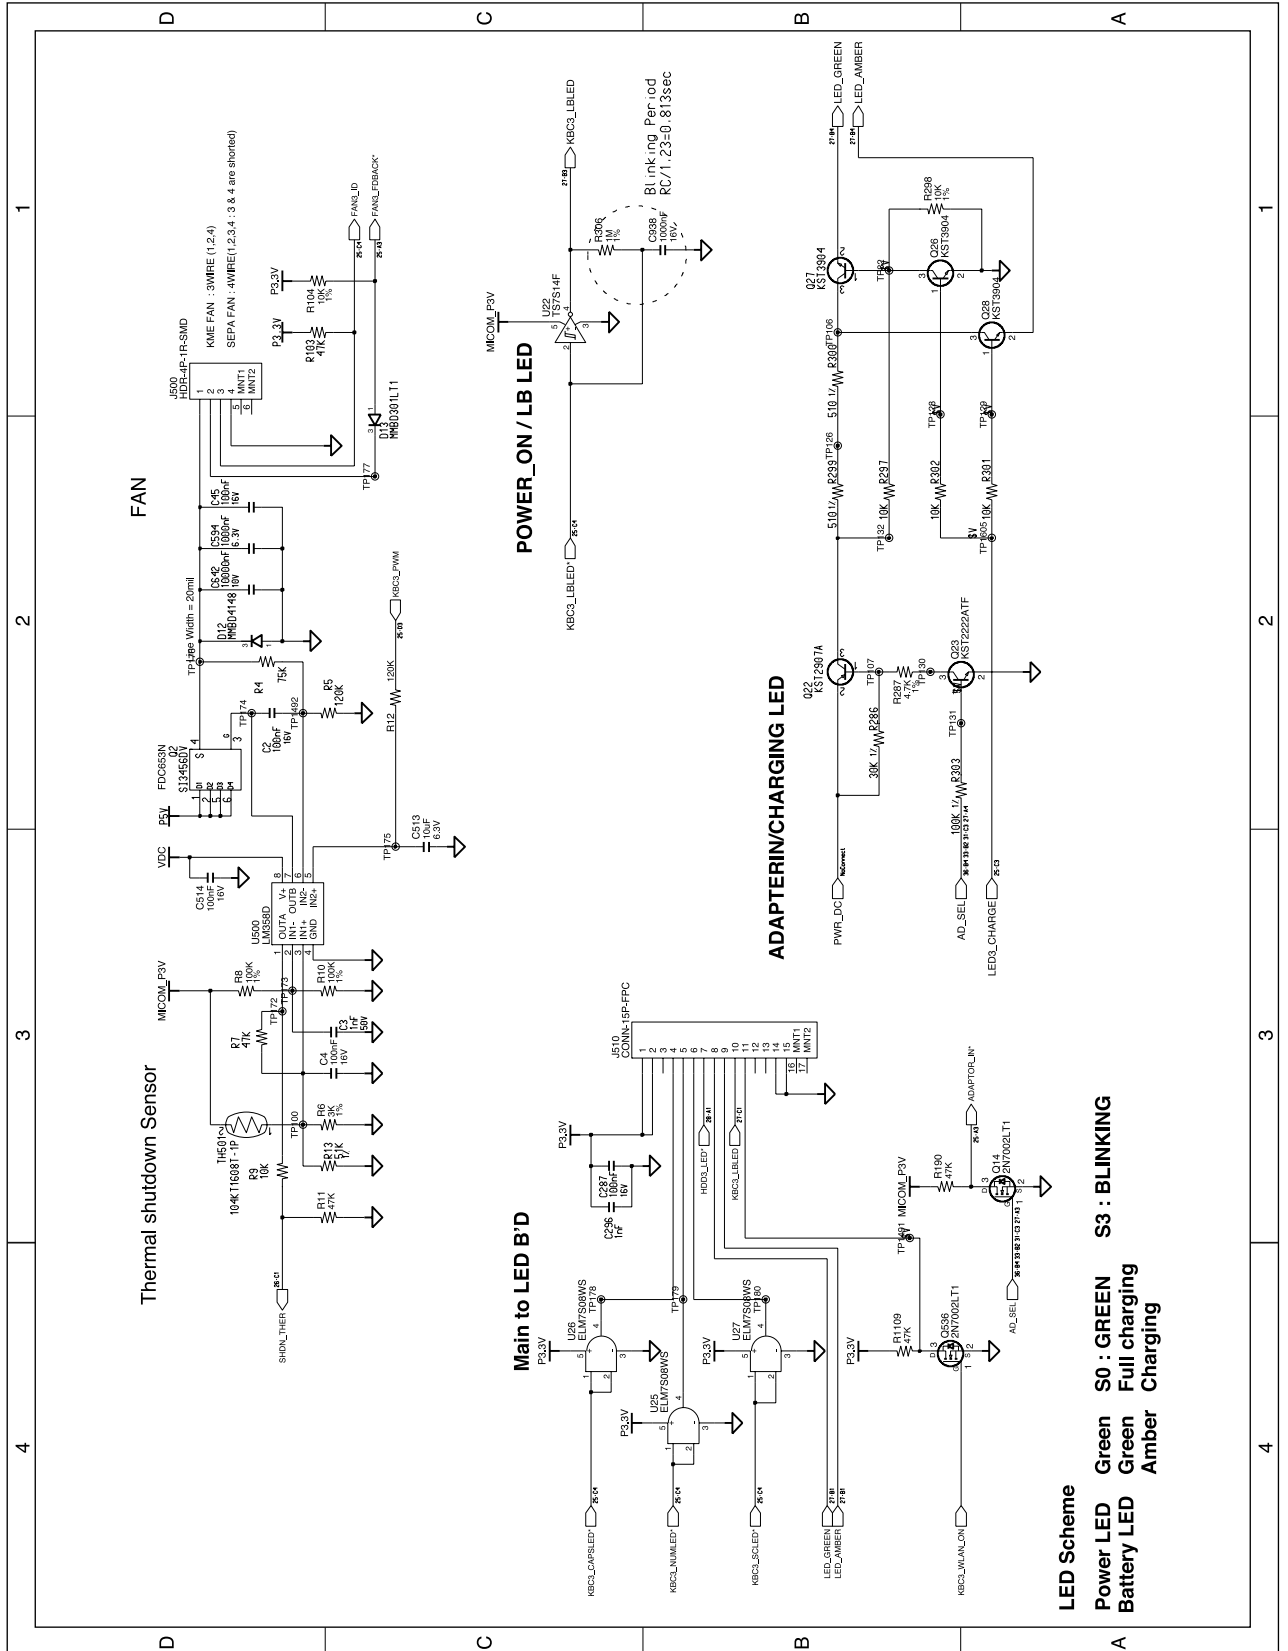

5-1-1(aa) System Main Board Schematic Sheet 28 of 40(USB, B/T, HDD CONNECTOR)

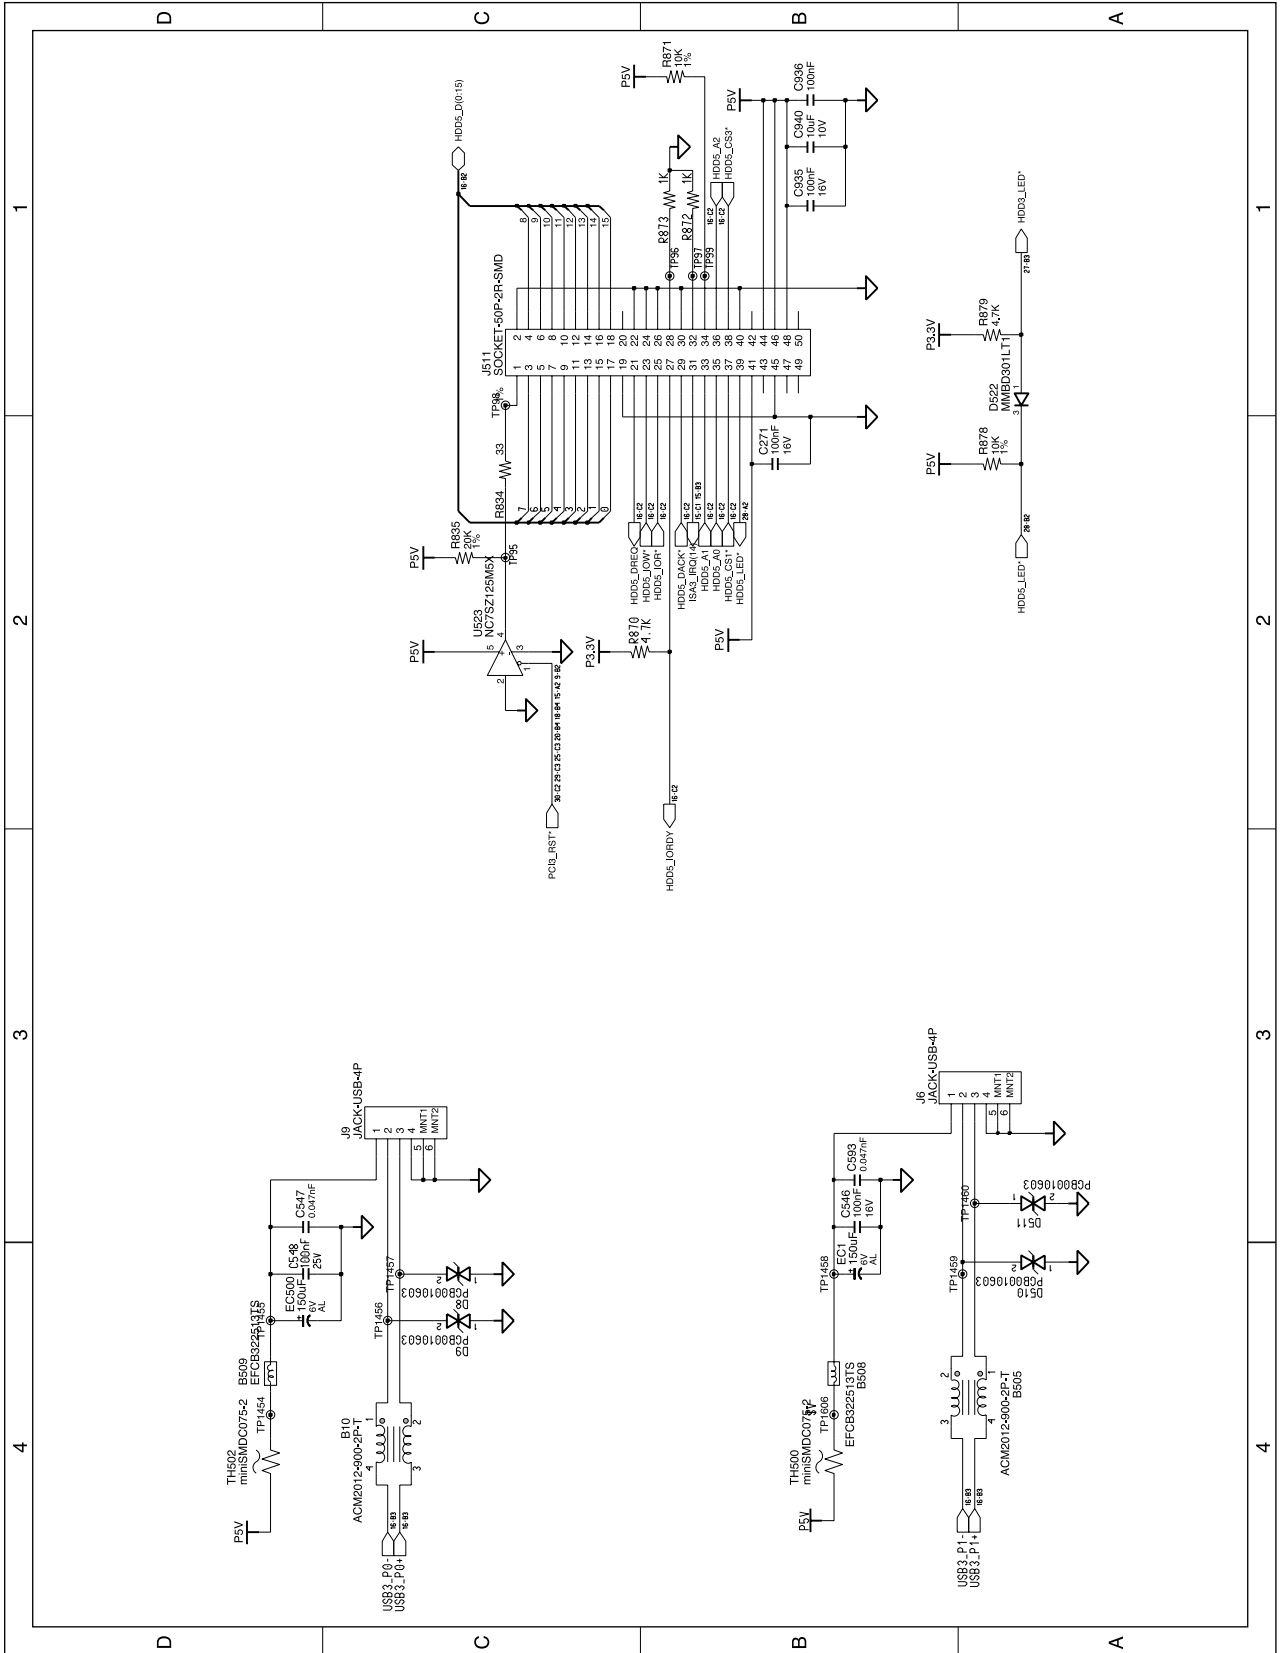


5-1-1(bb) System Main Board Schematic Sheet 29 of 40(SUPER-I/O)

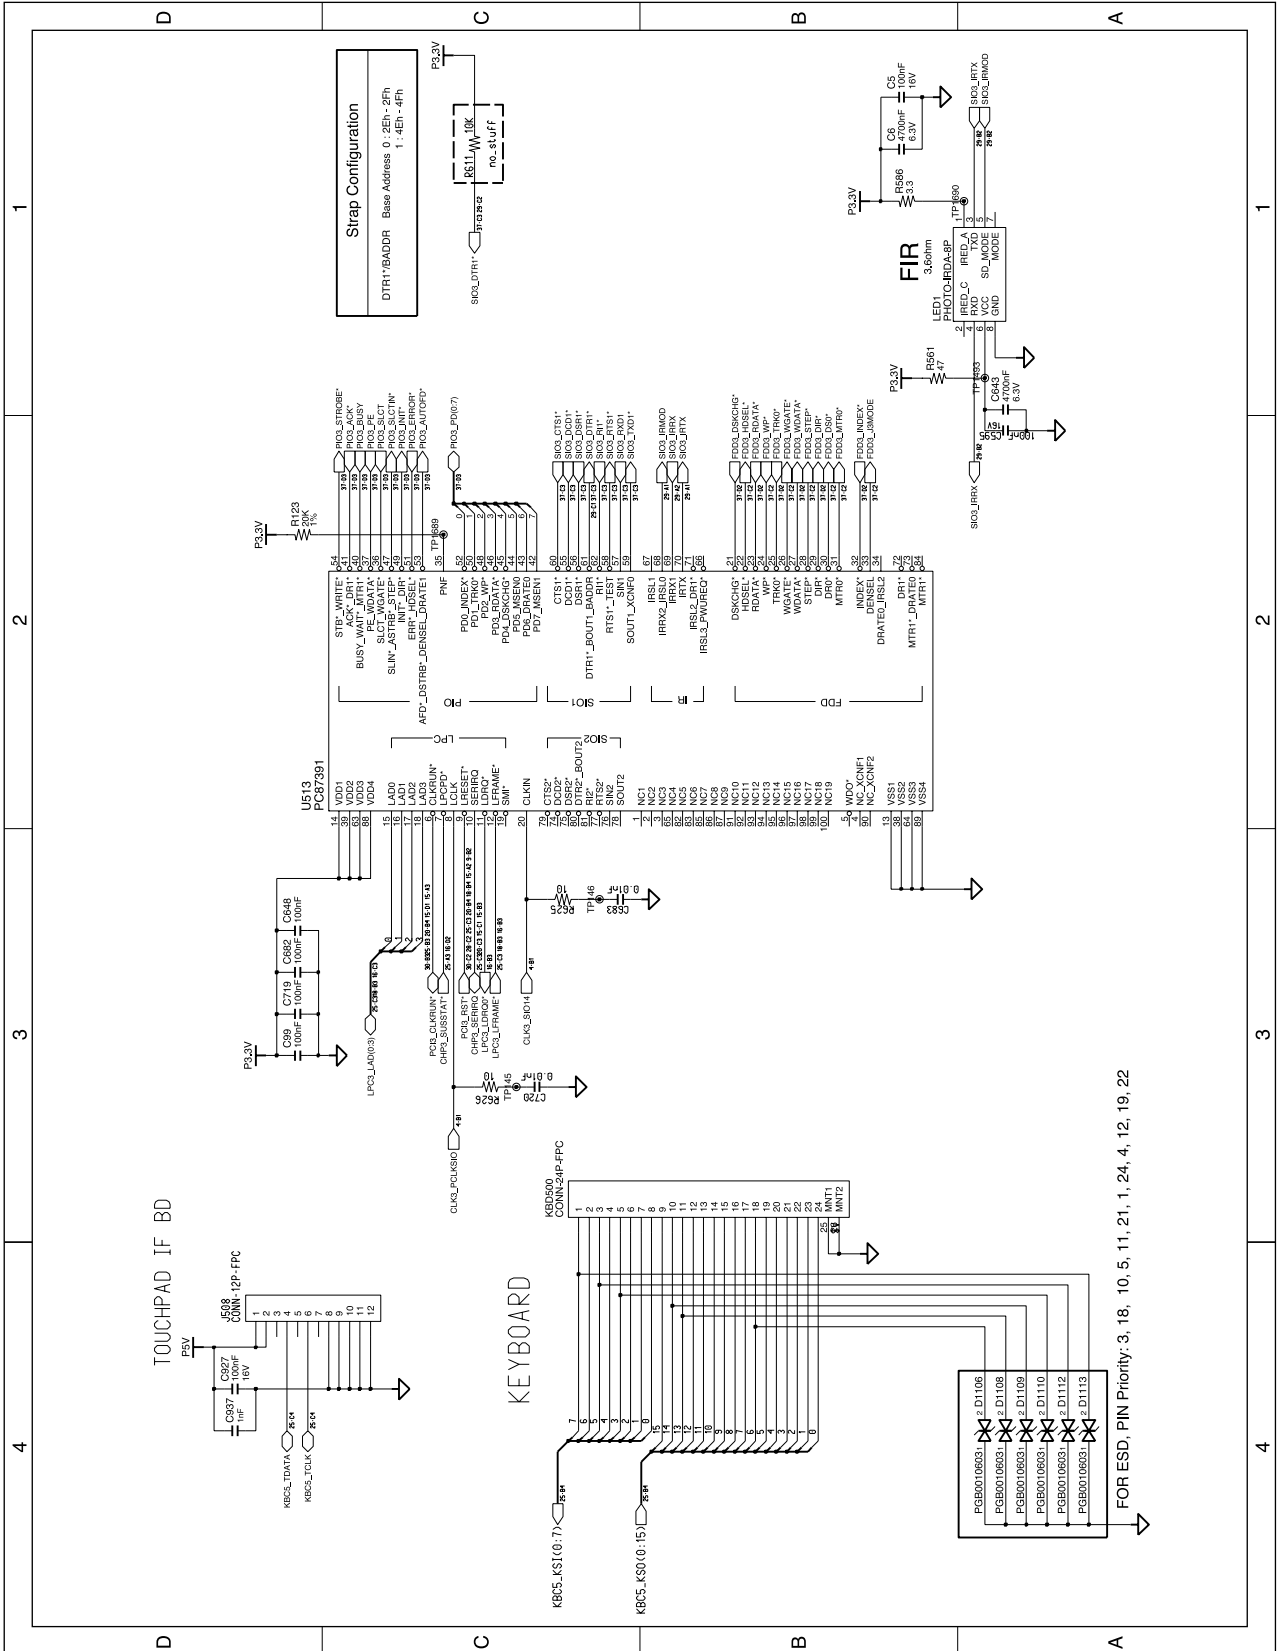


FOR ESD, PIN Priority: 3, 18, 10, 5, 11, 21, 1, 24, 4, 12, 19, 22


5-1-1(cc) System Main Board Schematic Sheet 30 of 40(MINI-PCI)

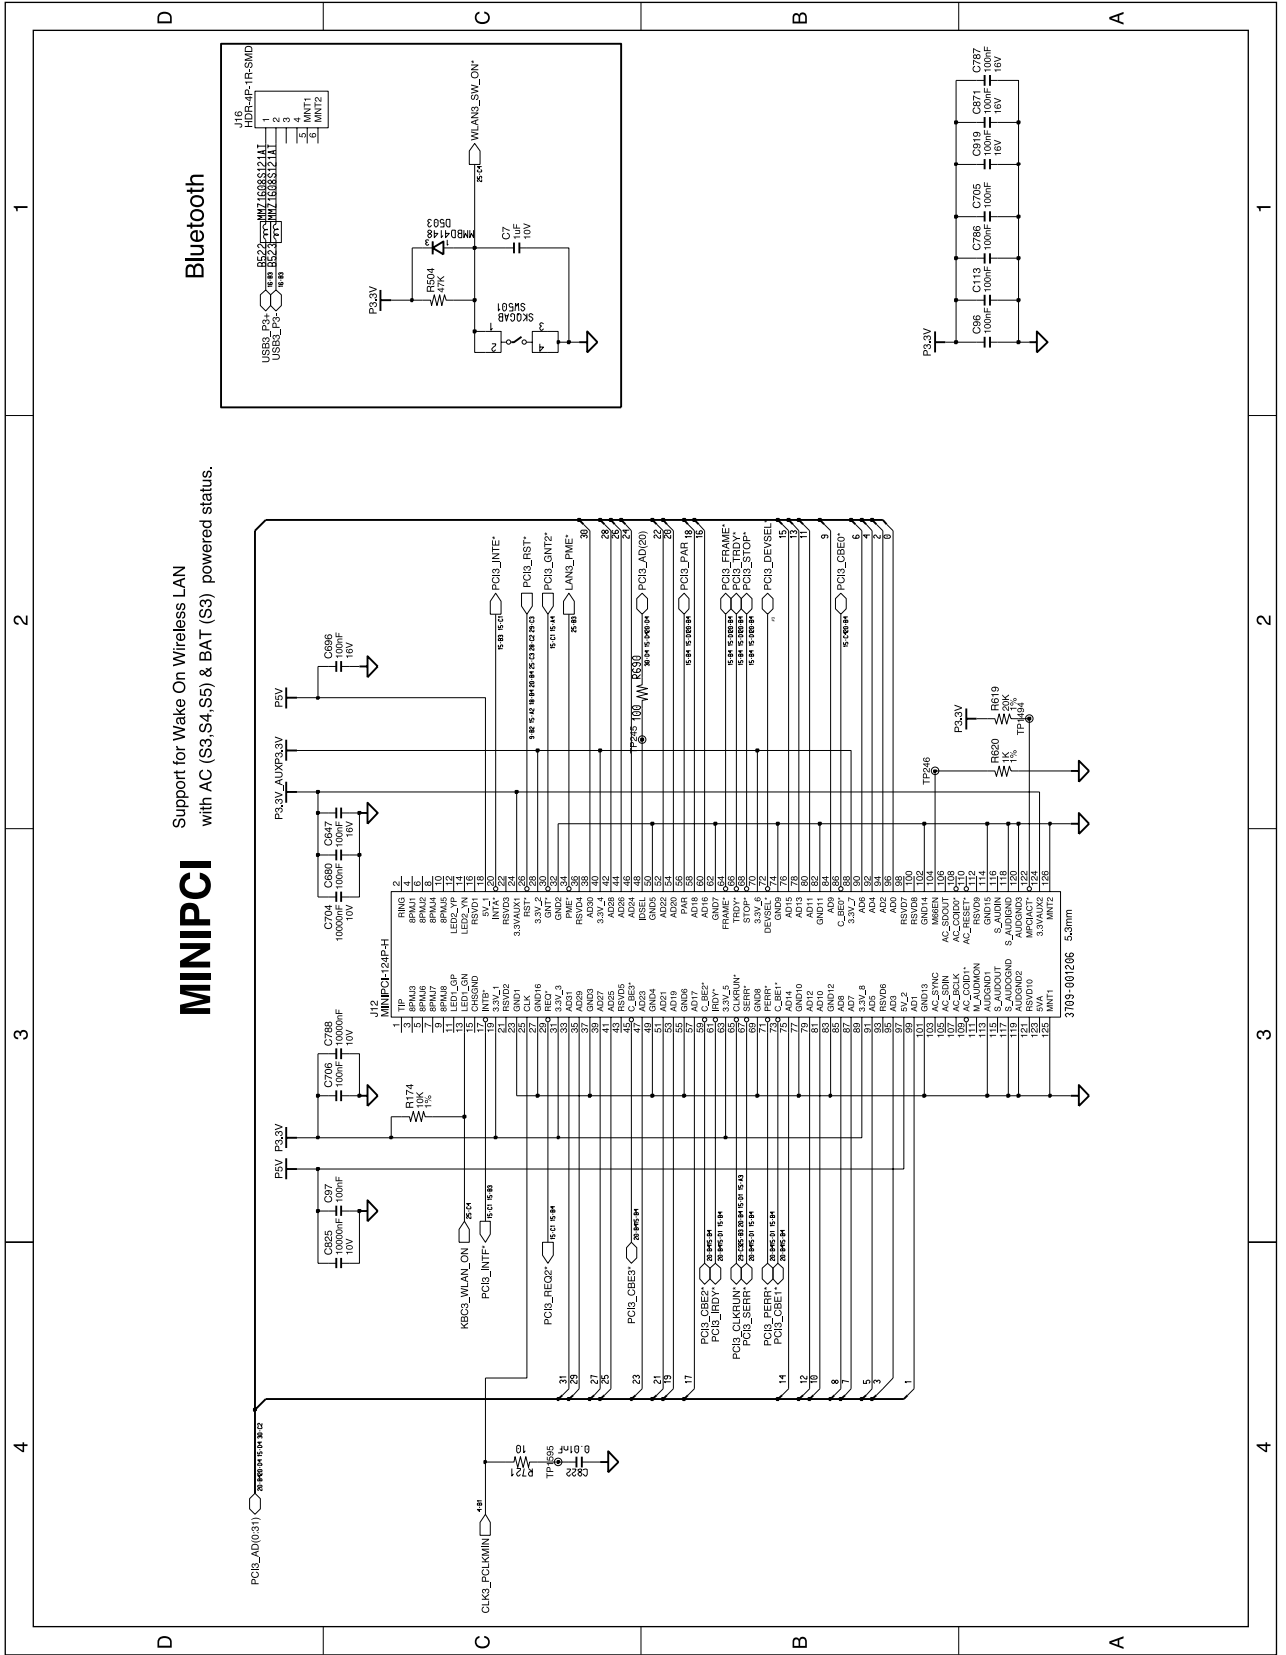


5-1-1(dd) System Main Board Schematic Sheet 31 of 40(DC/DC, 3.3V_LAN, 5V_AUX)

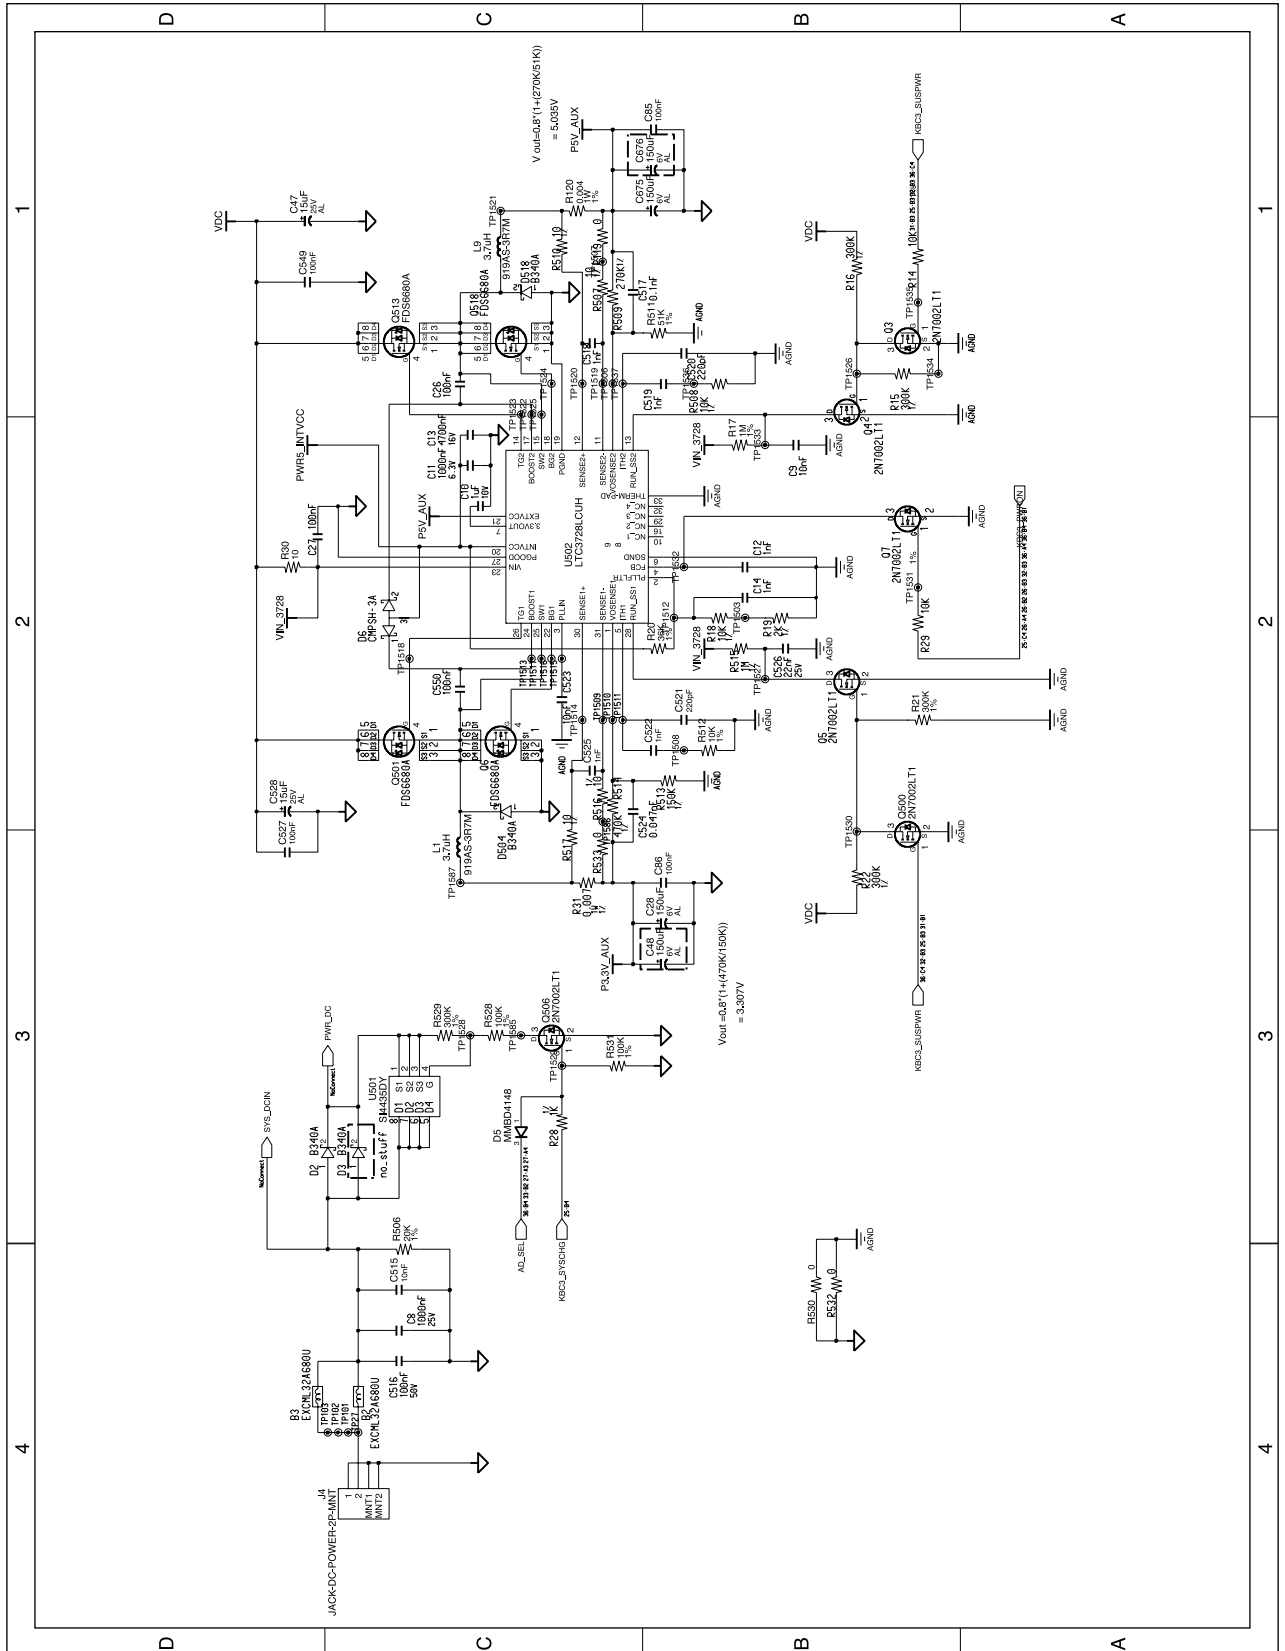


5-1-1(ee) System Main Board Schematic Sheet 32 of 40(DDR 2.5V_AUX, 1.25V)

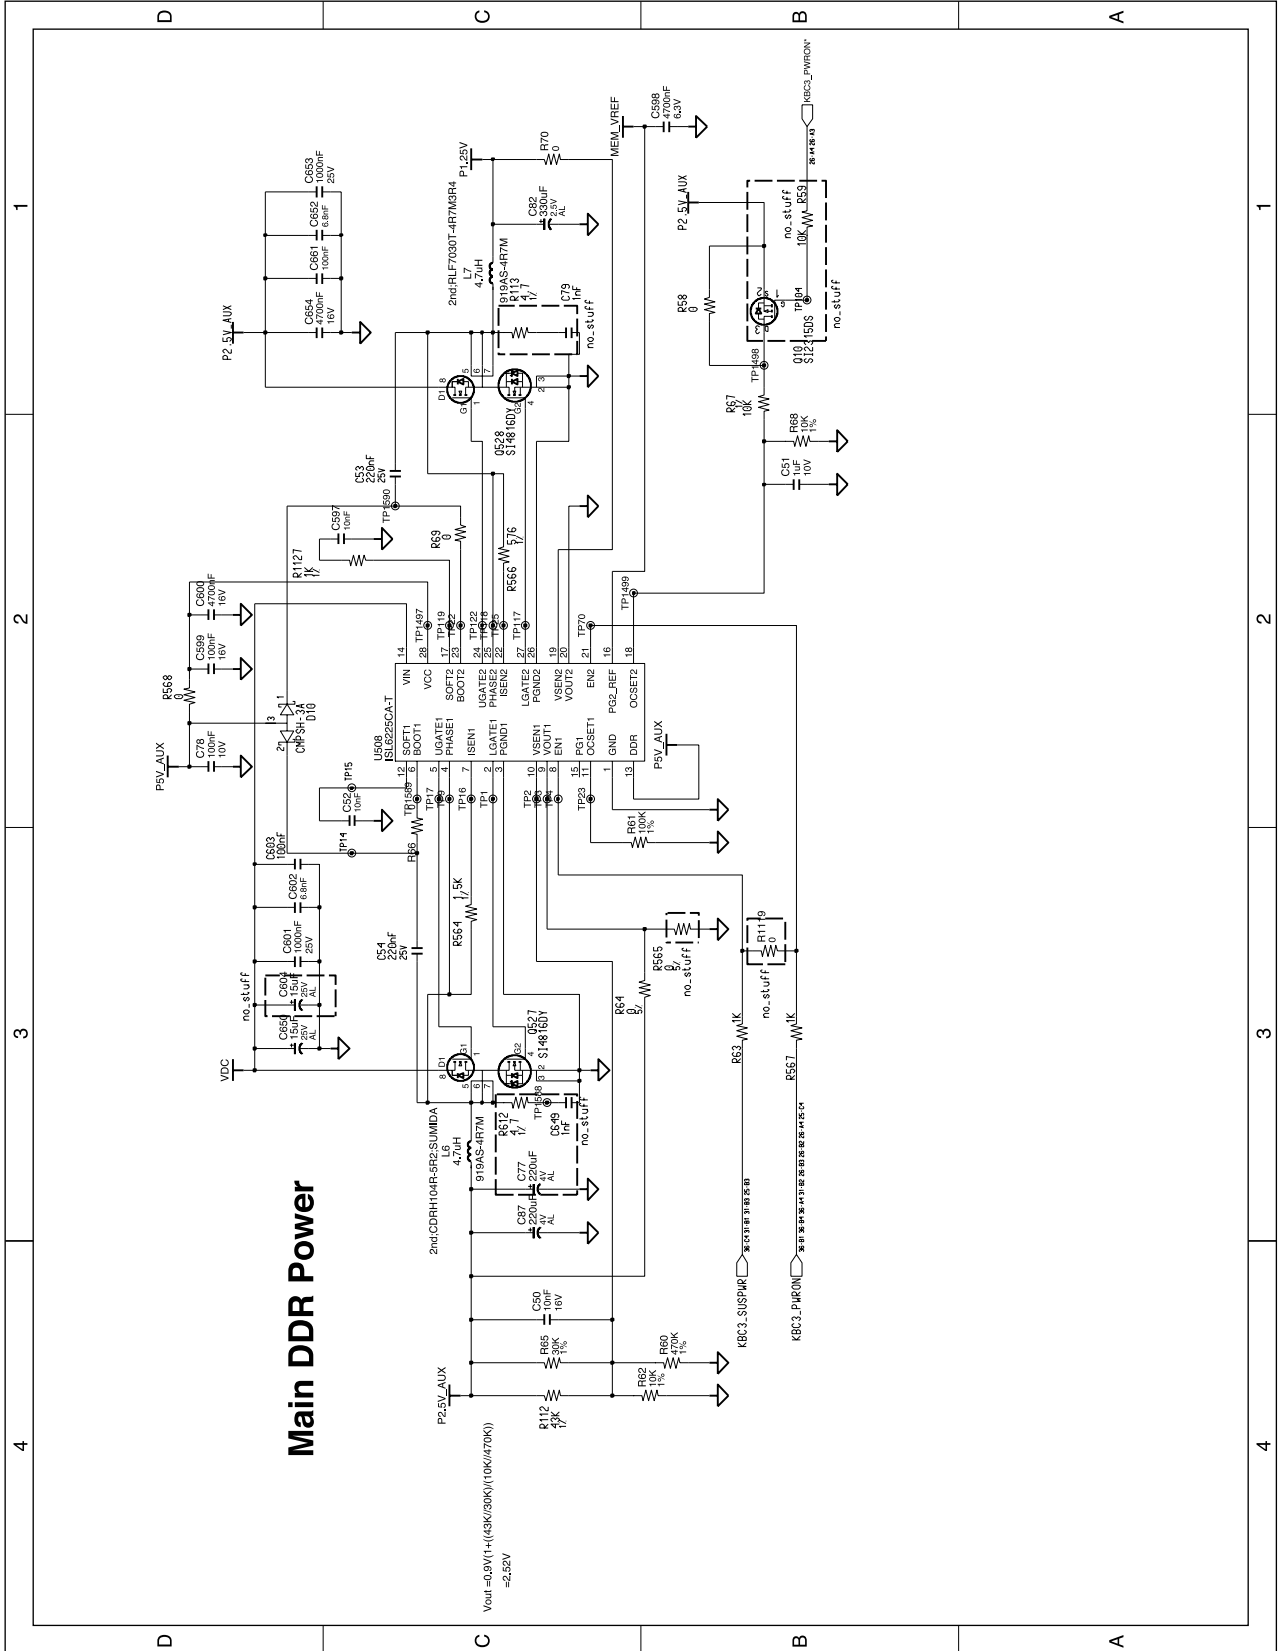


5-1-1(ff) System Main Board Schematic Sheet 33 of 40(BATT CHARGER)

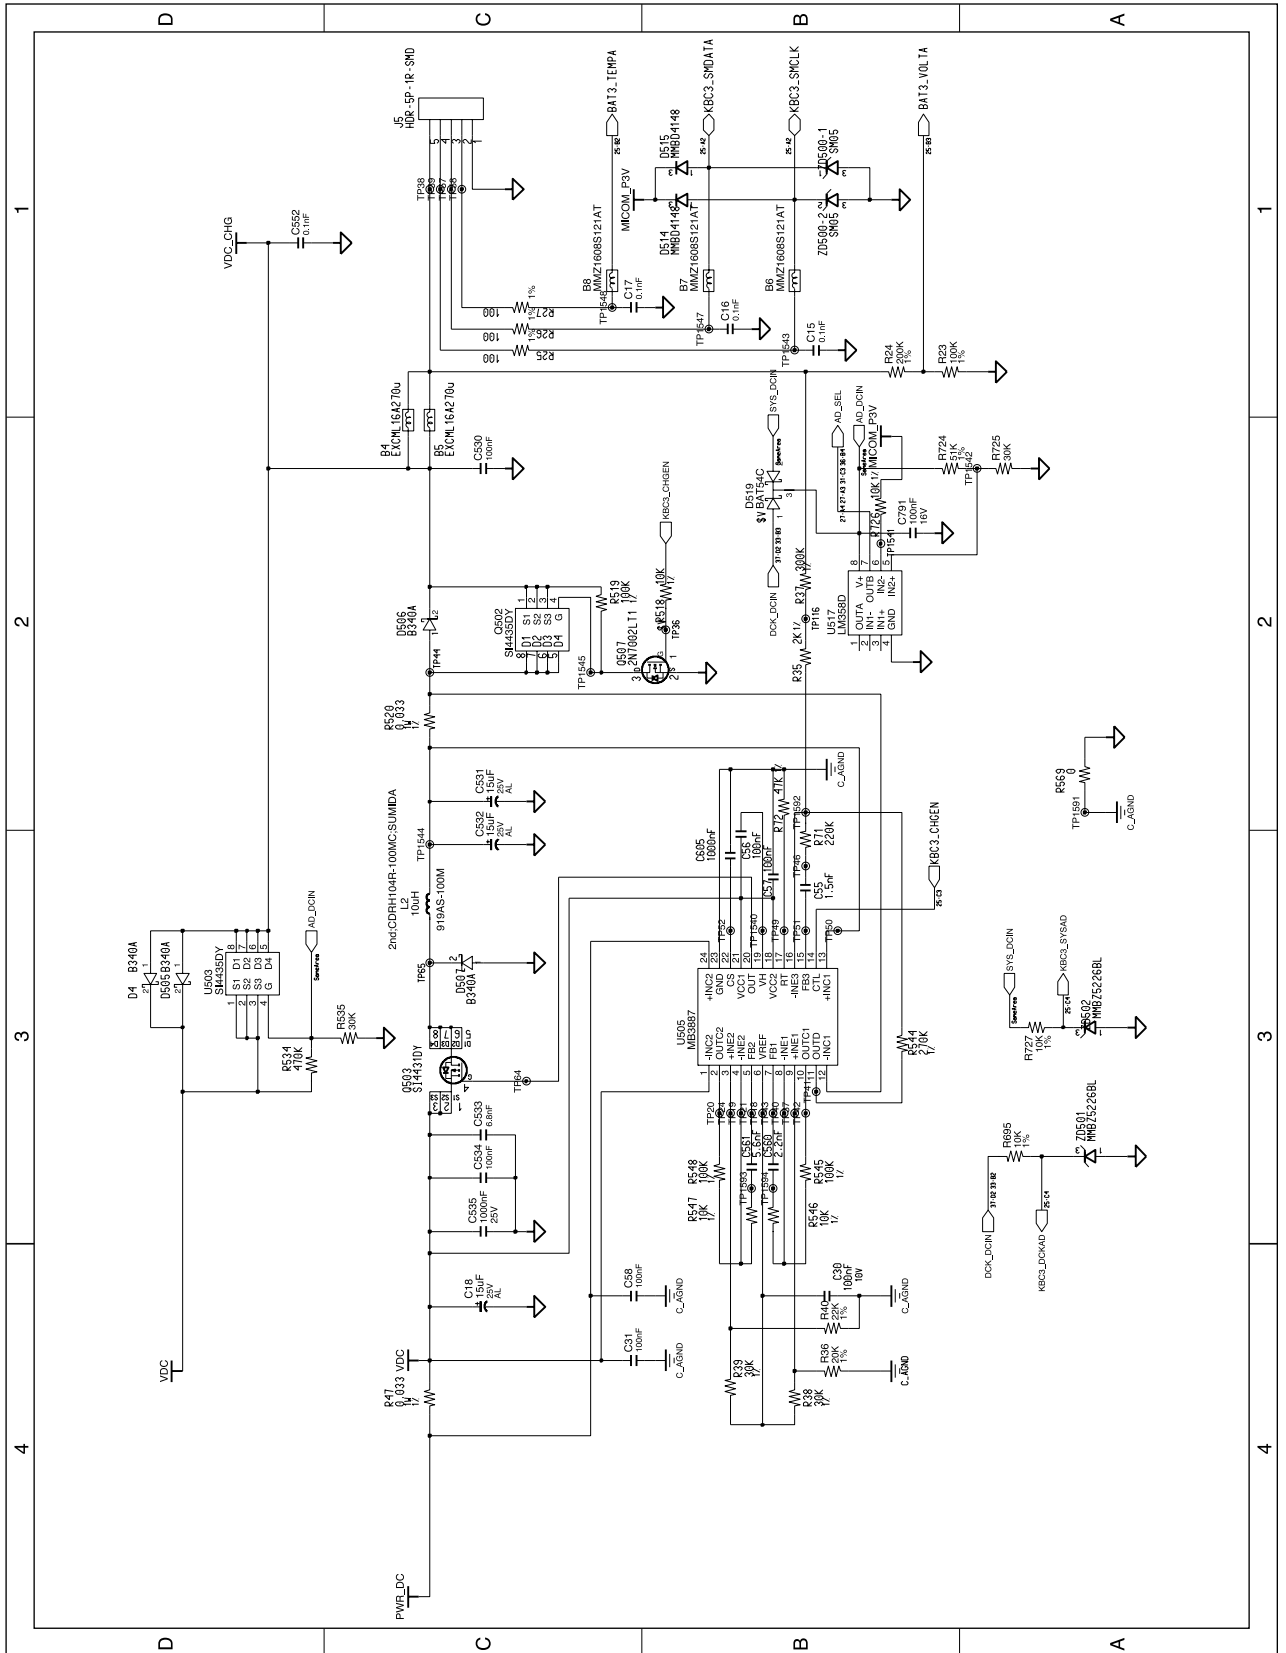


5-1-1(gg) System Main Board Schematic Sheet 34 of 40(VCC_CORE/IMVP4)

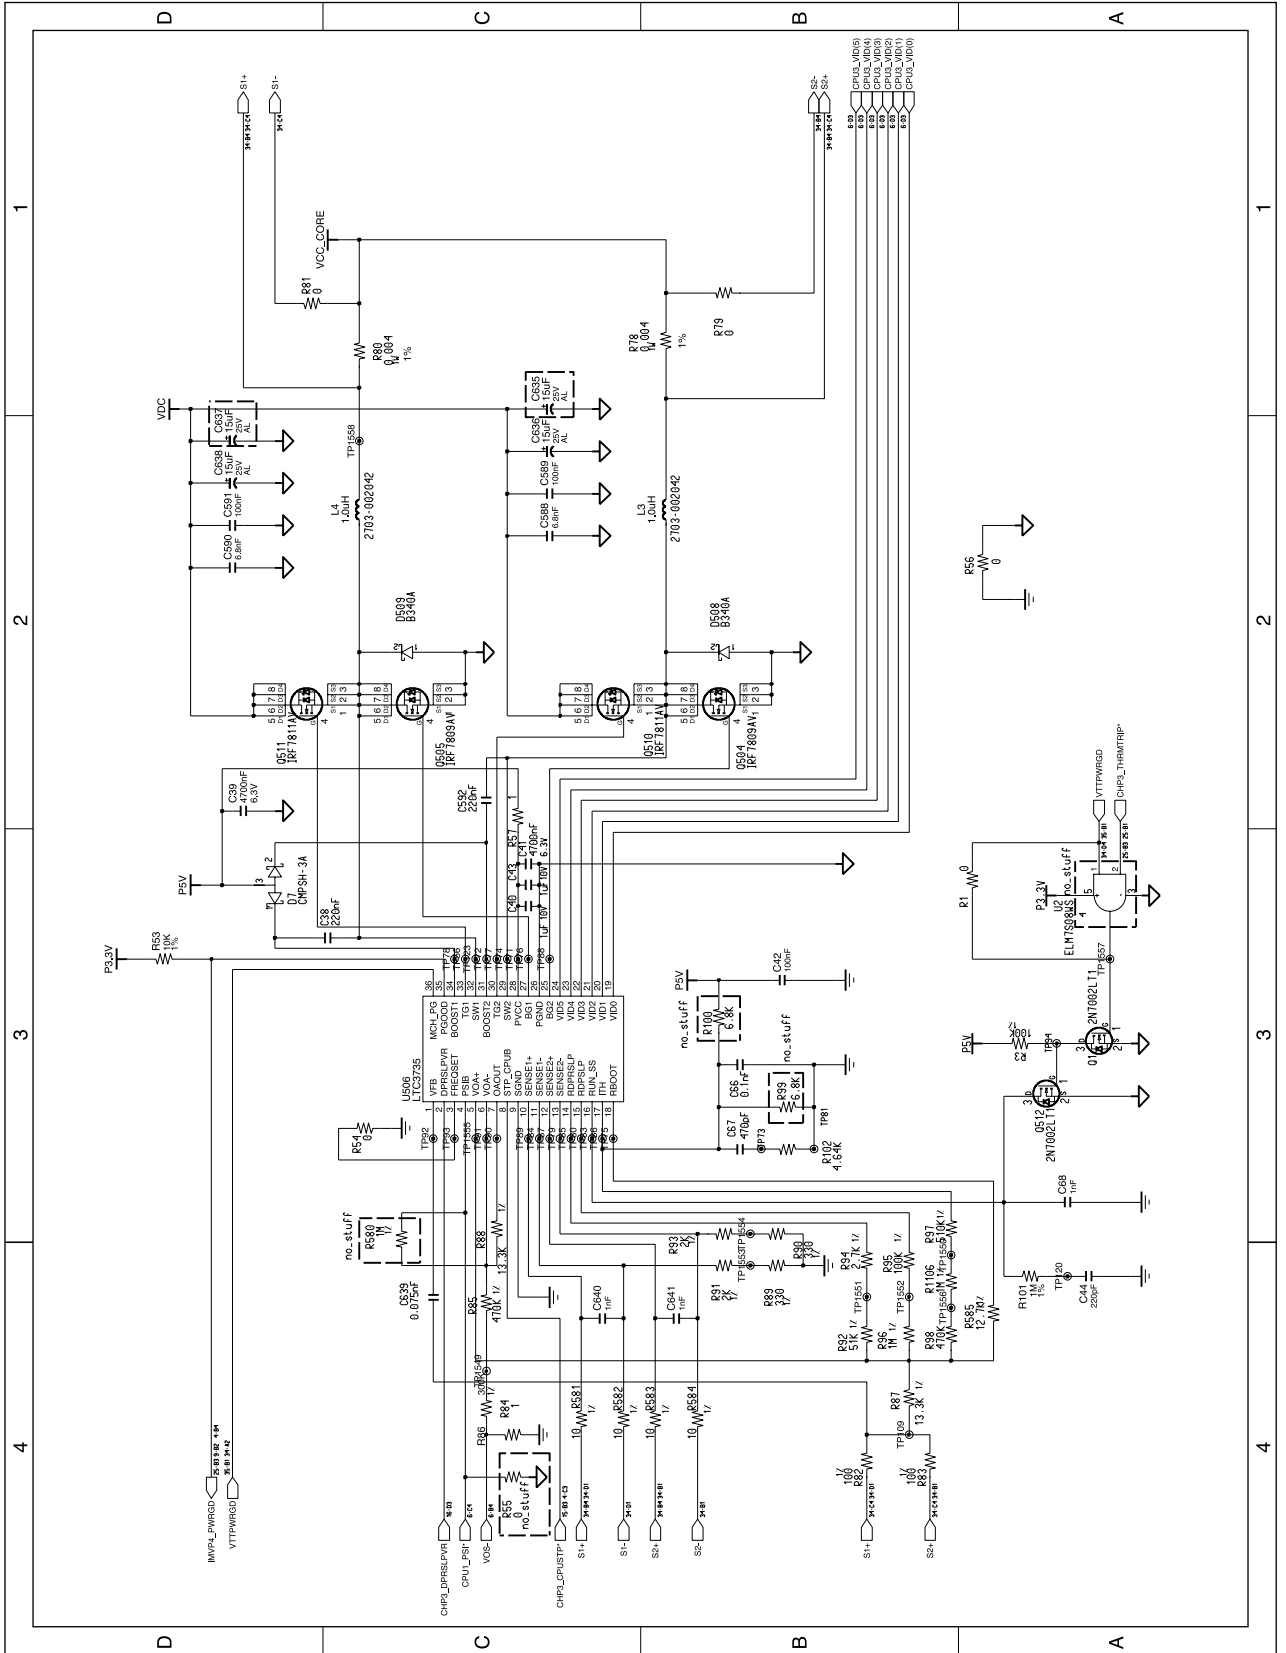


5-1-1(hh) System Main Board Schematic Sheet 35 of 40(VCCP/VCC_MCH)

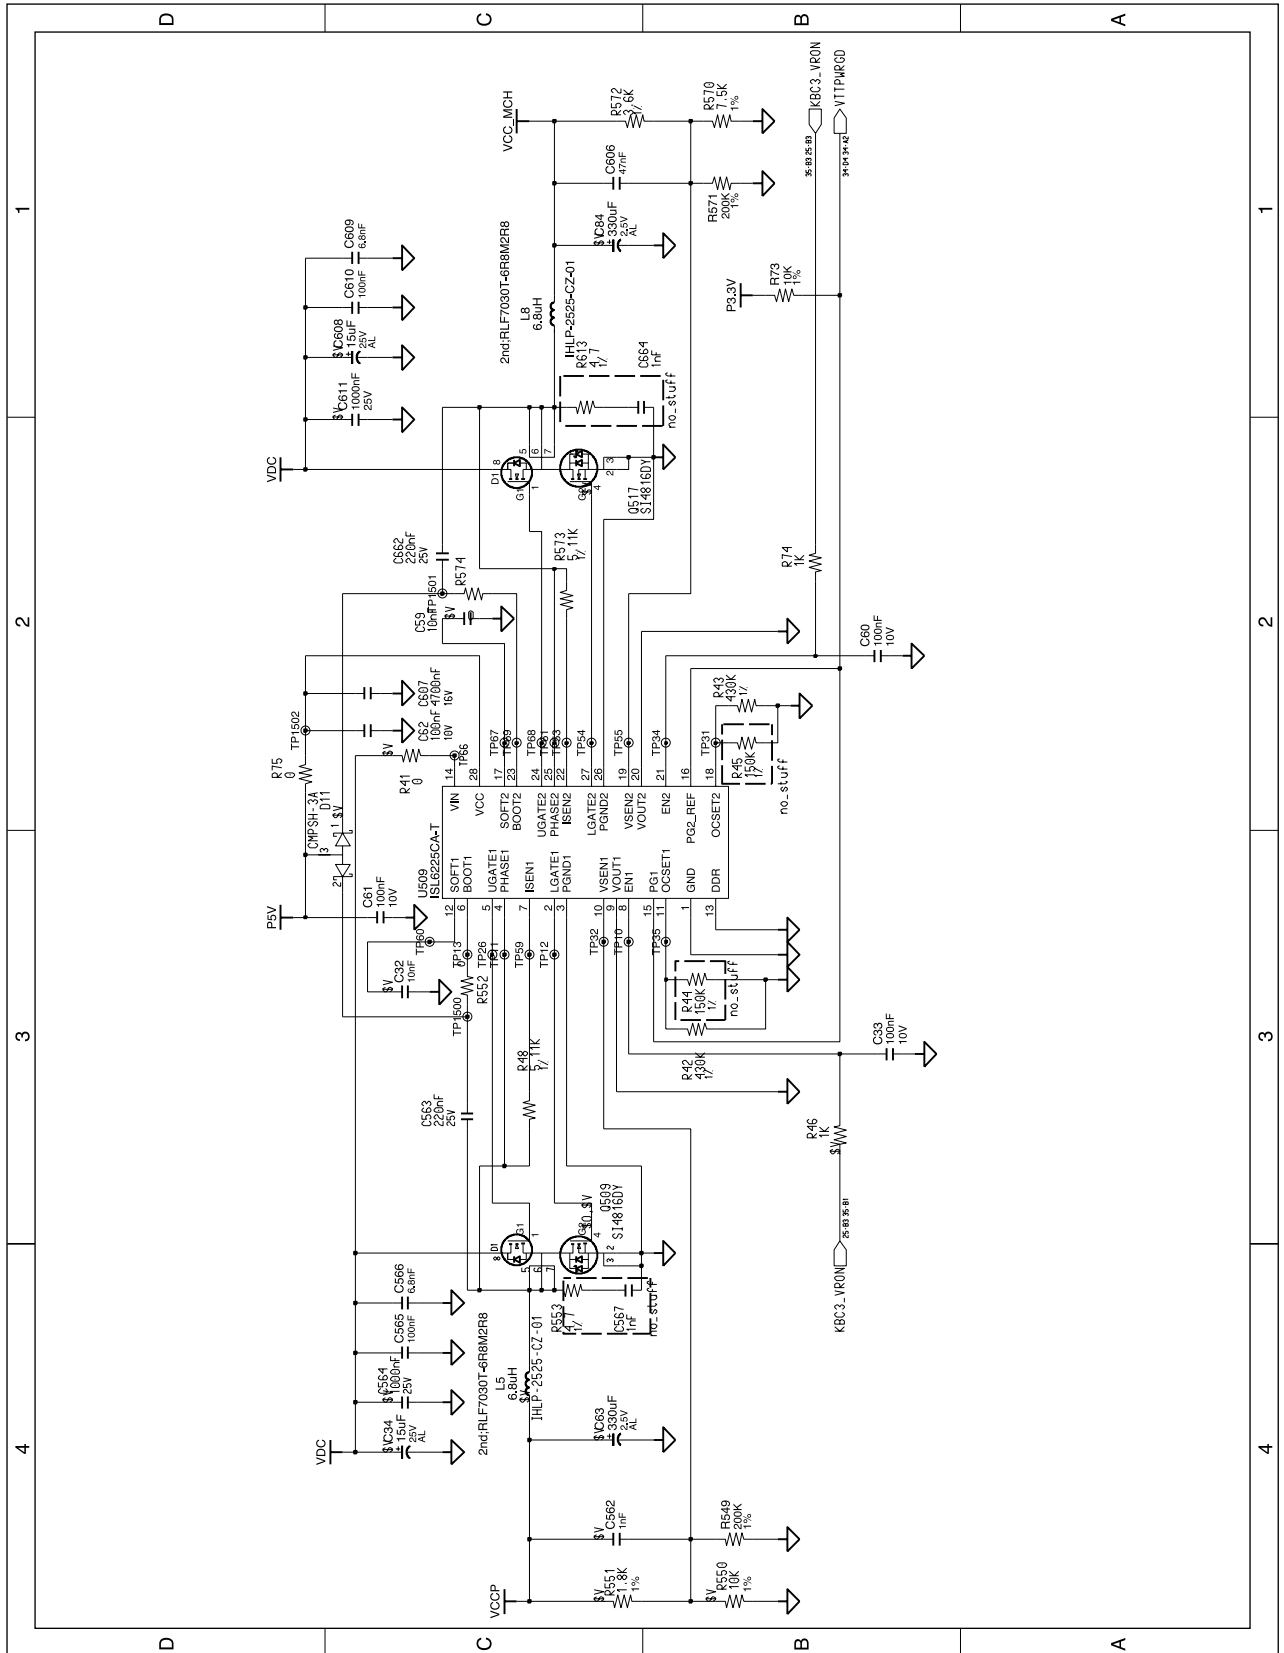


5-1-1(ii) System Main Board Schematic Sheet 36 of 40(1.5V_AUX/1.8V)

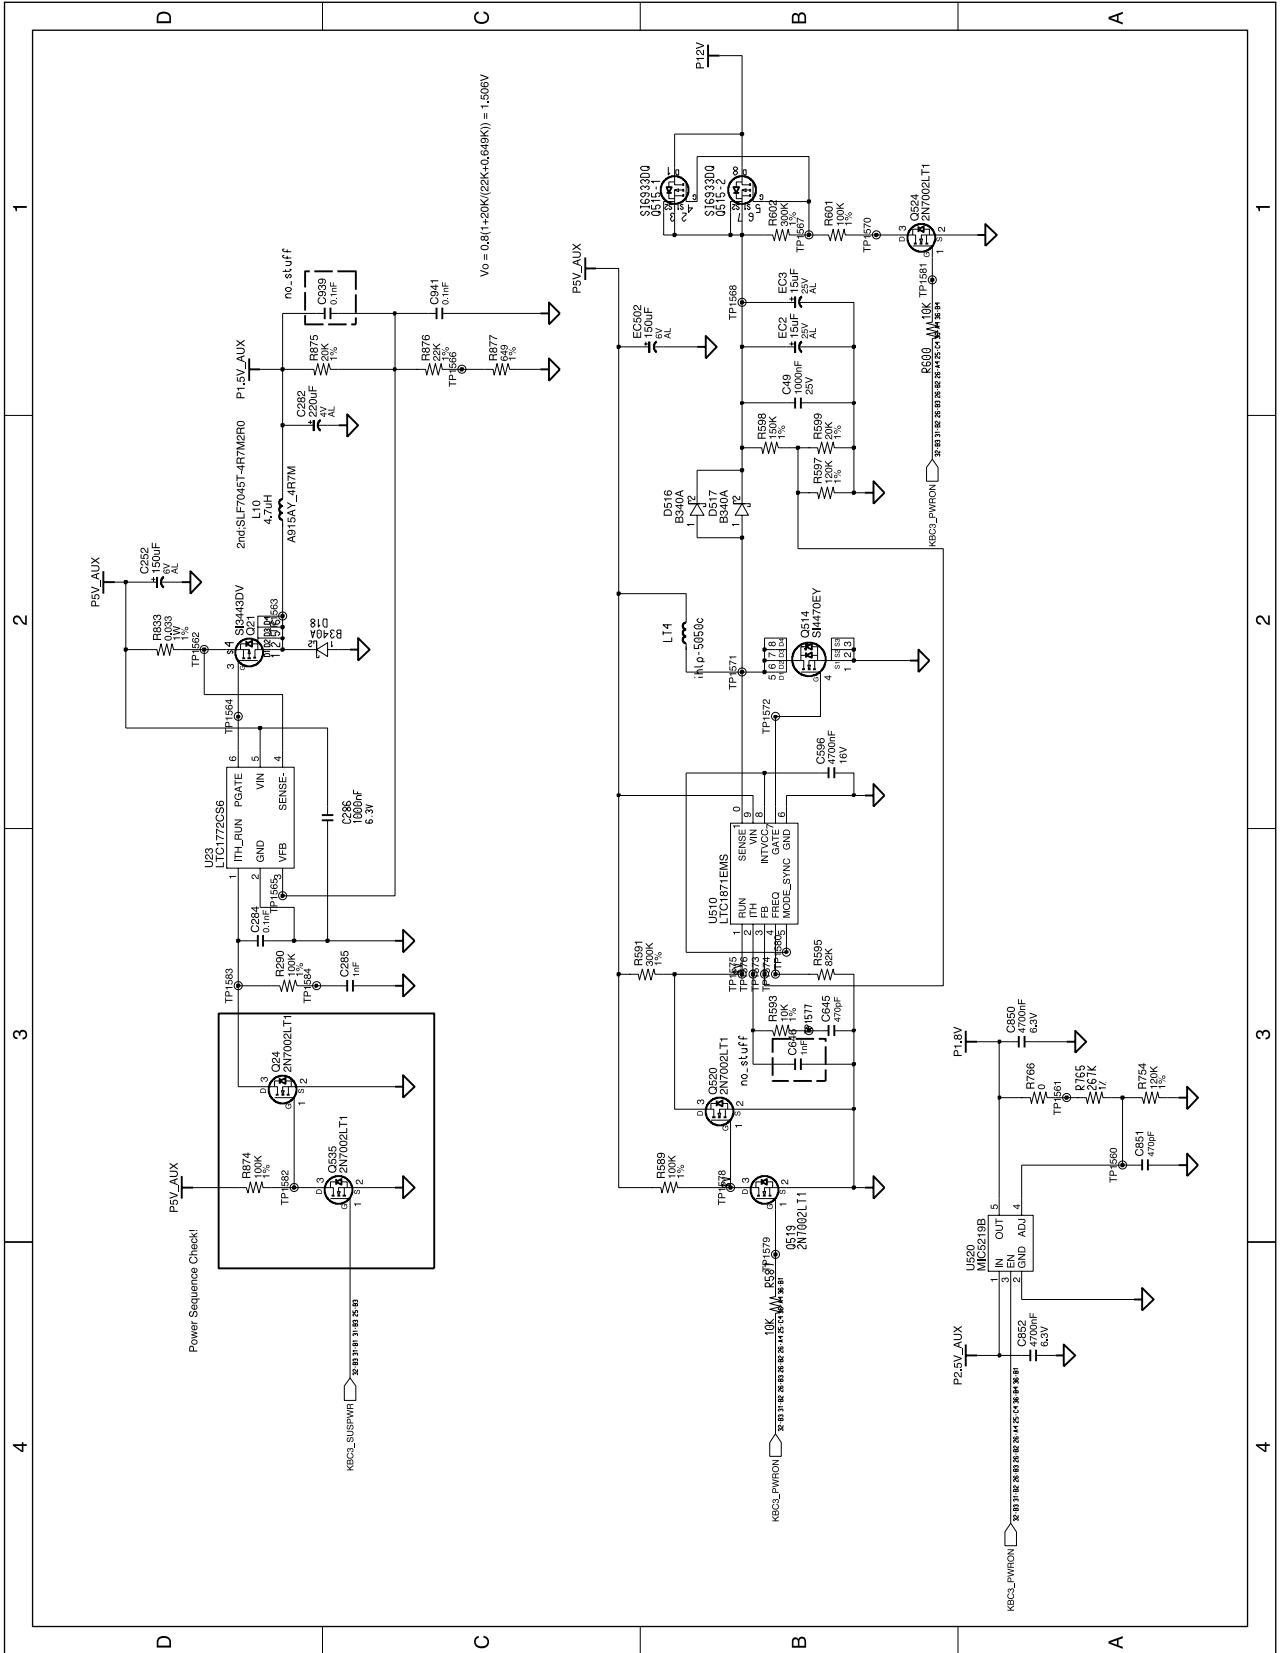


5-1-1(jj) System Main Board Schematic Sheet 37 of 40(DOCKING CONNECTOR)

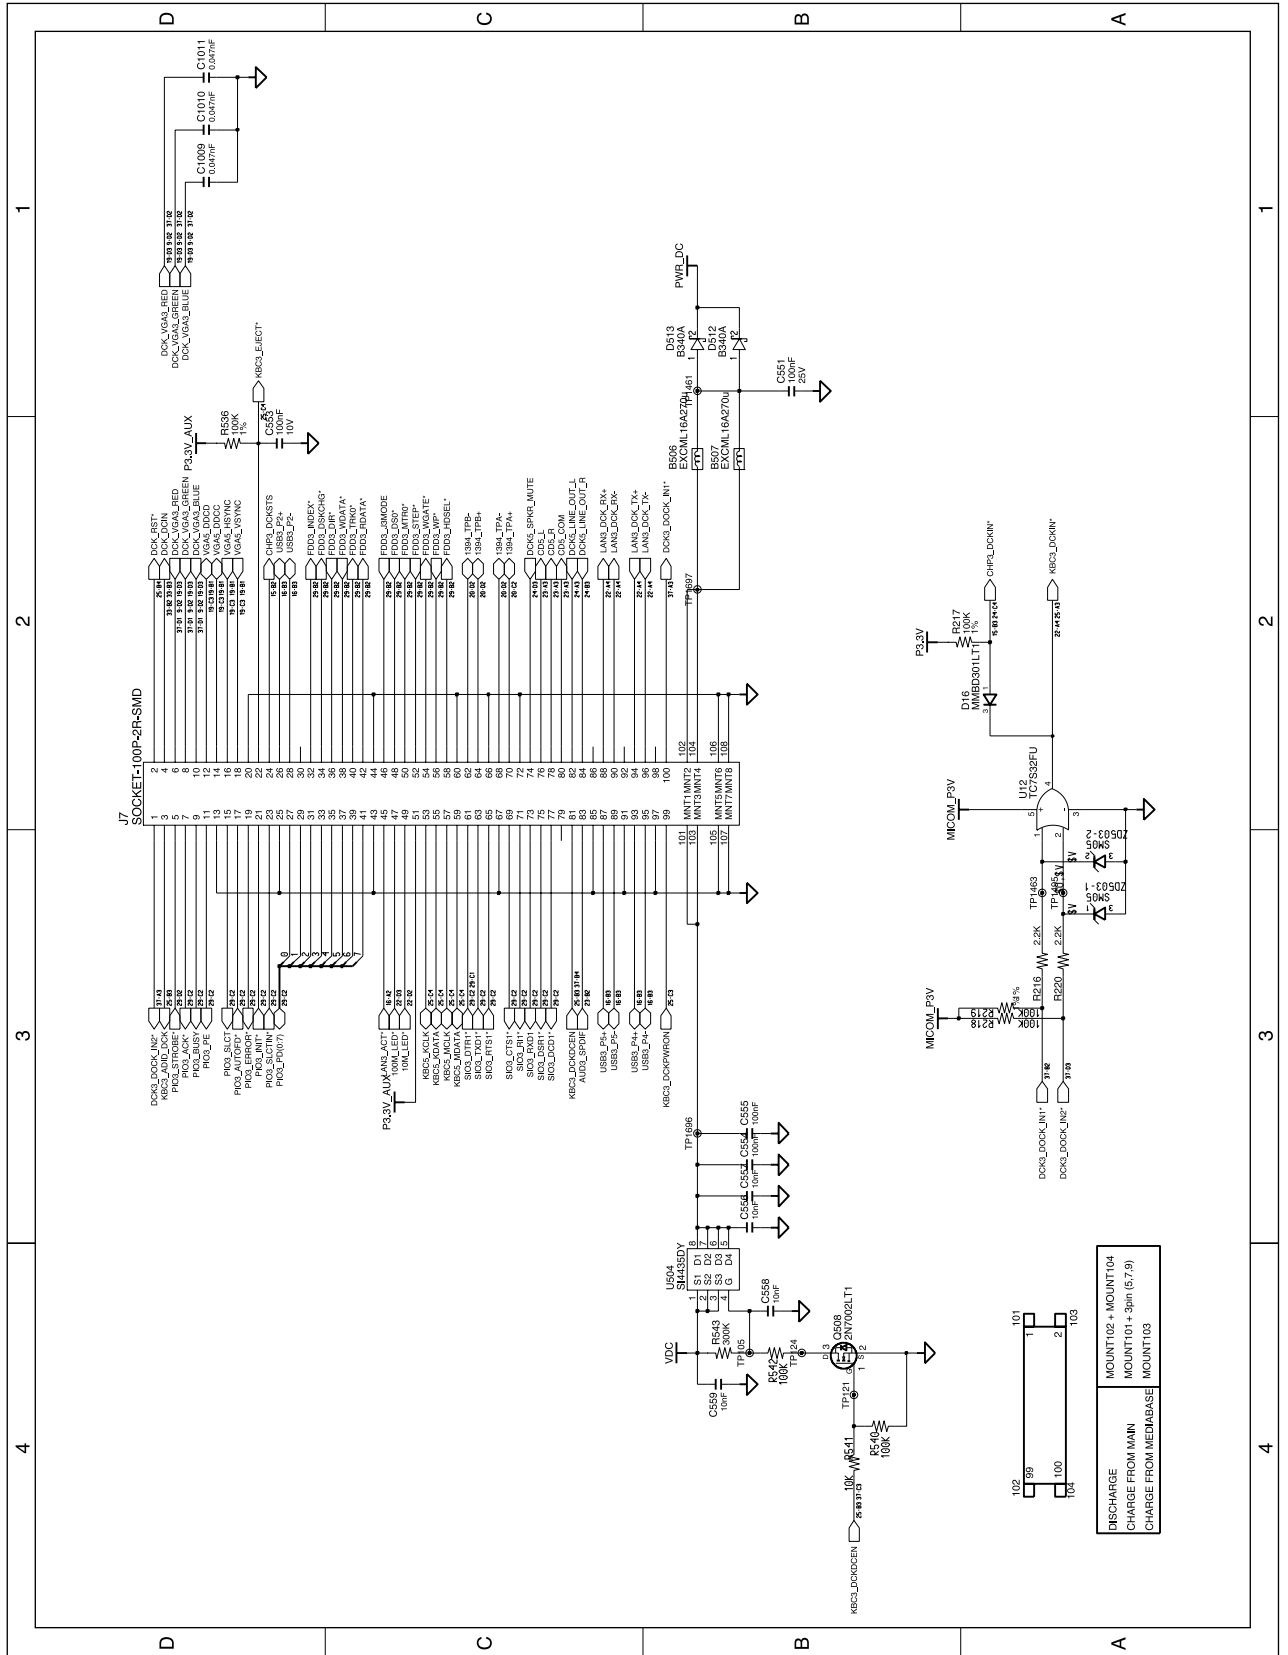


5-1-1(kk) System Main Board Schematic Sheet 38 of 40(MOUNT HOLE)

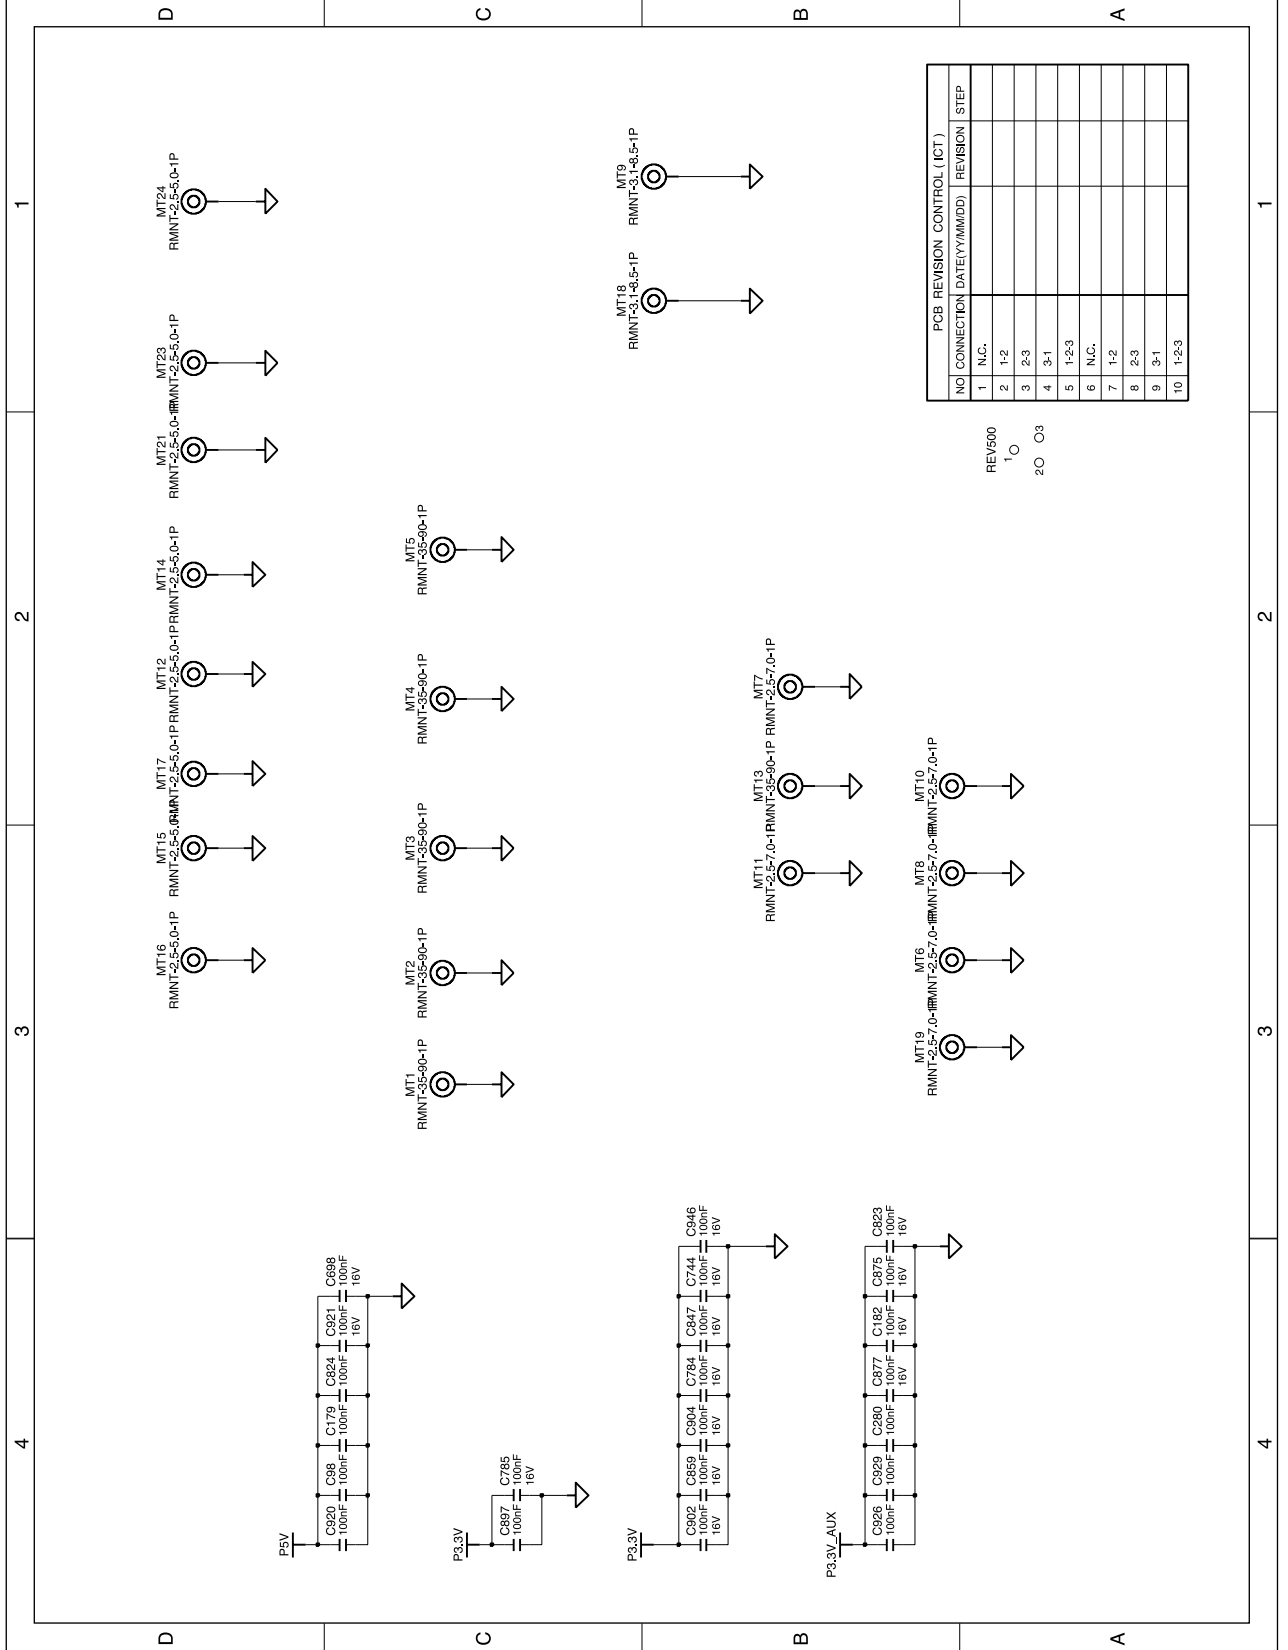


5-1-1(II) System Main Board Schematic Sheet 39 of 40(TOUCHPAD IF BOARD)

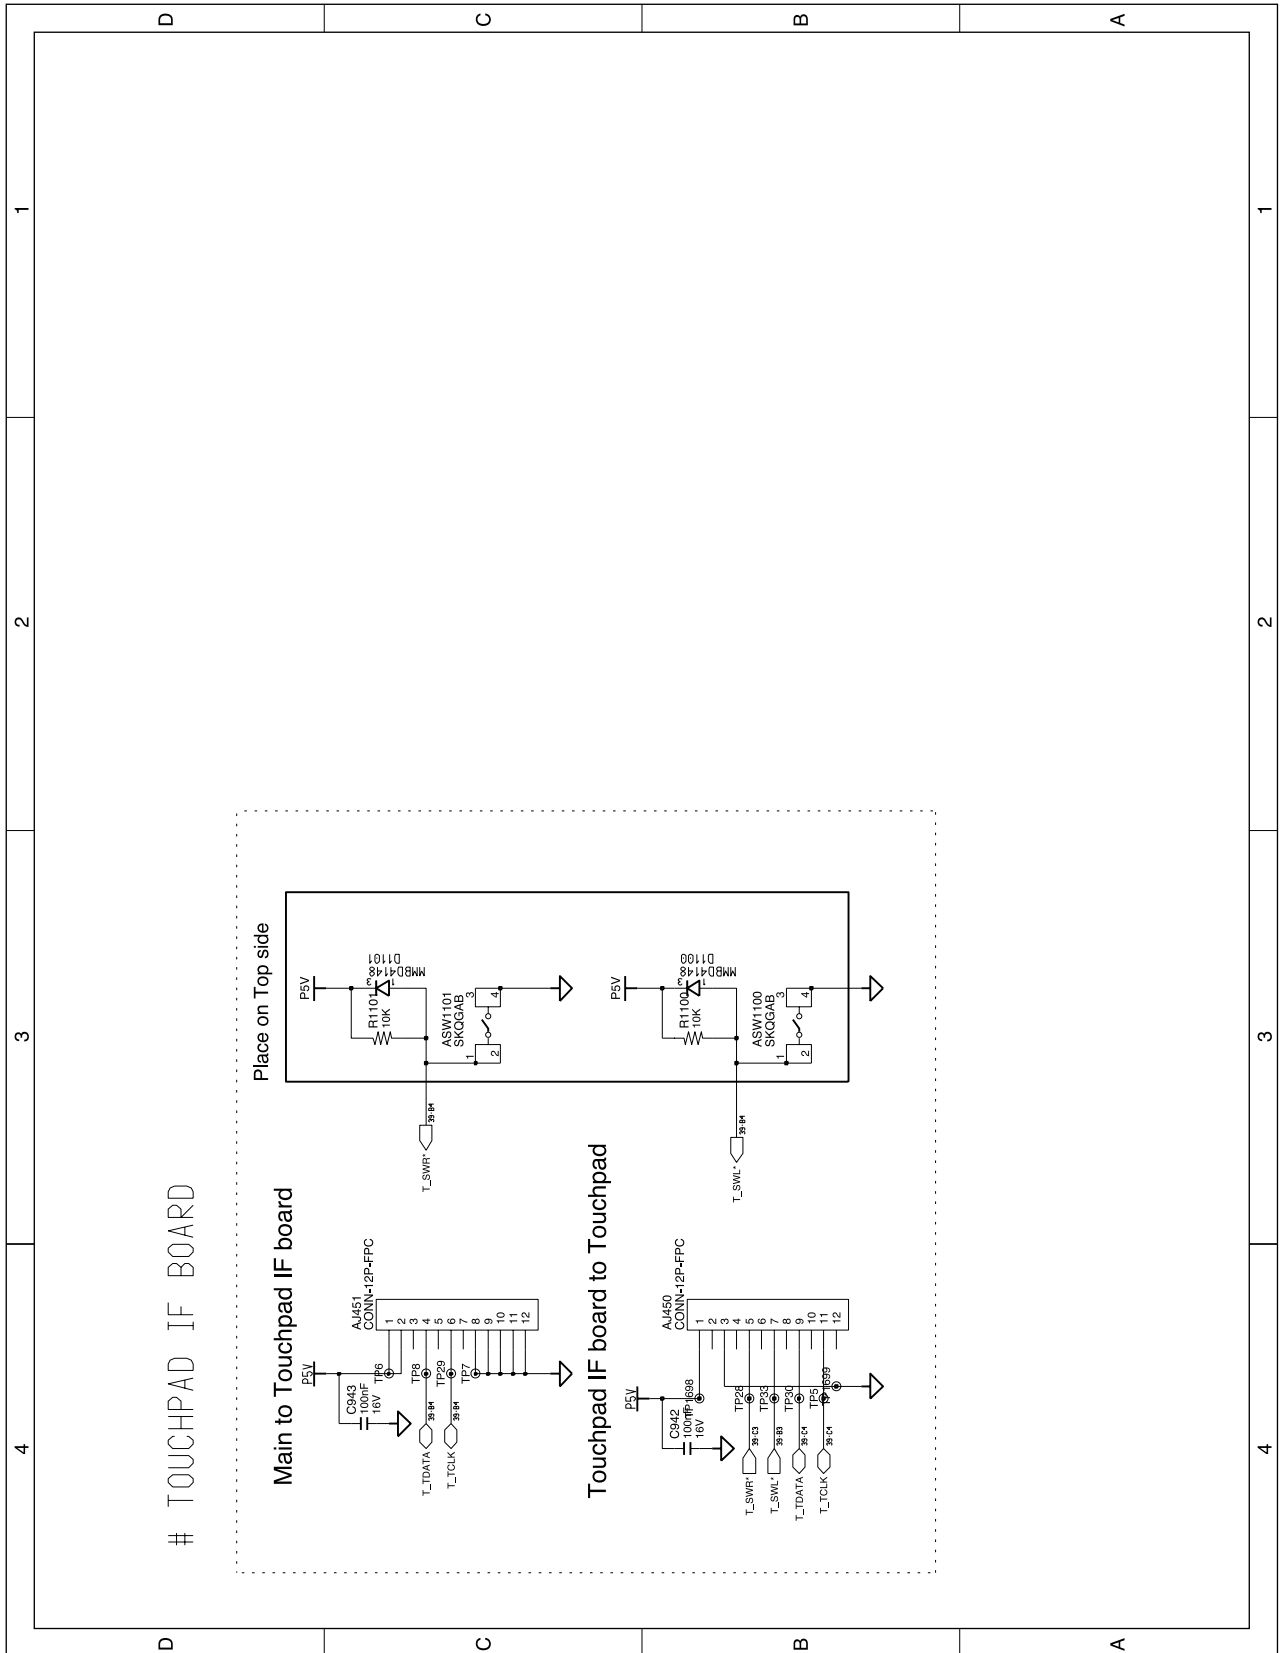

5-2 PCB Silkscreen

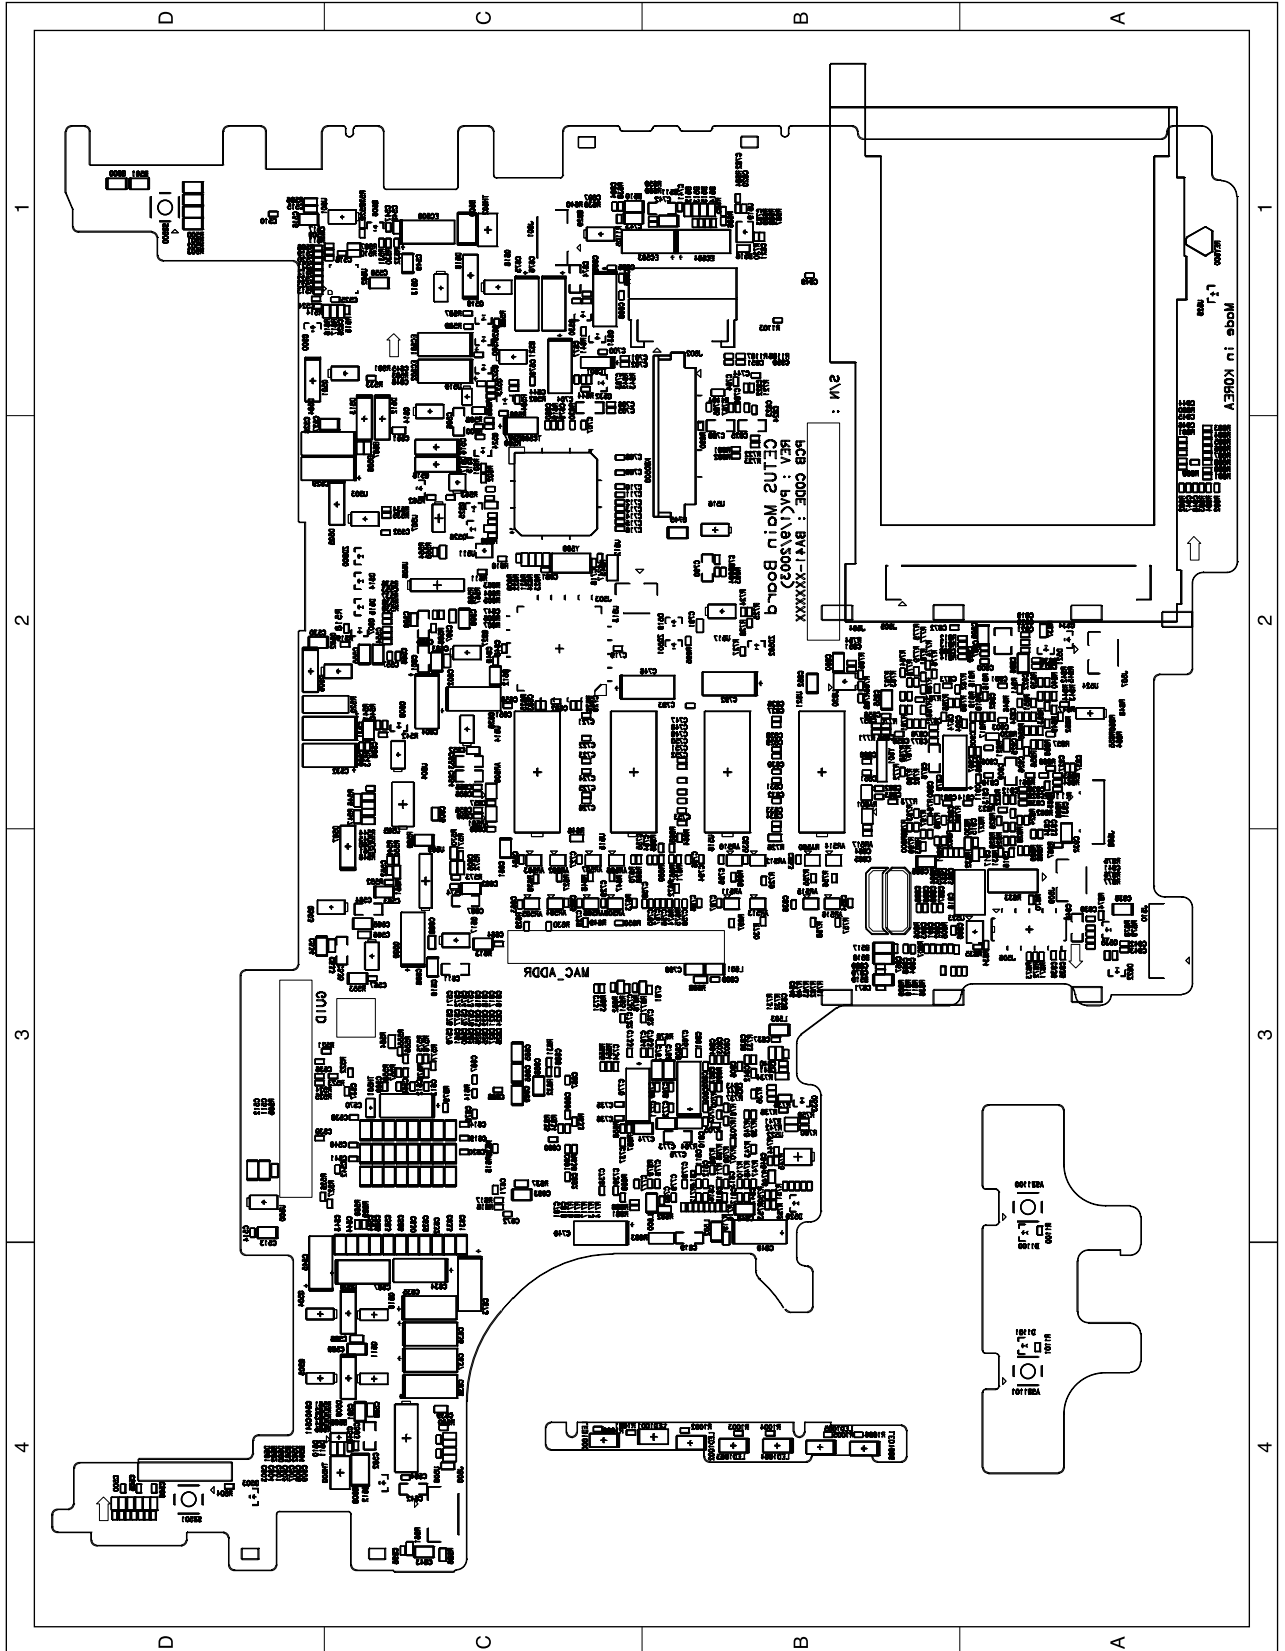

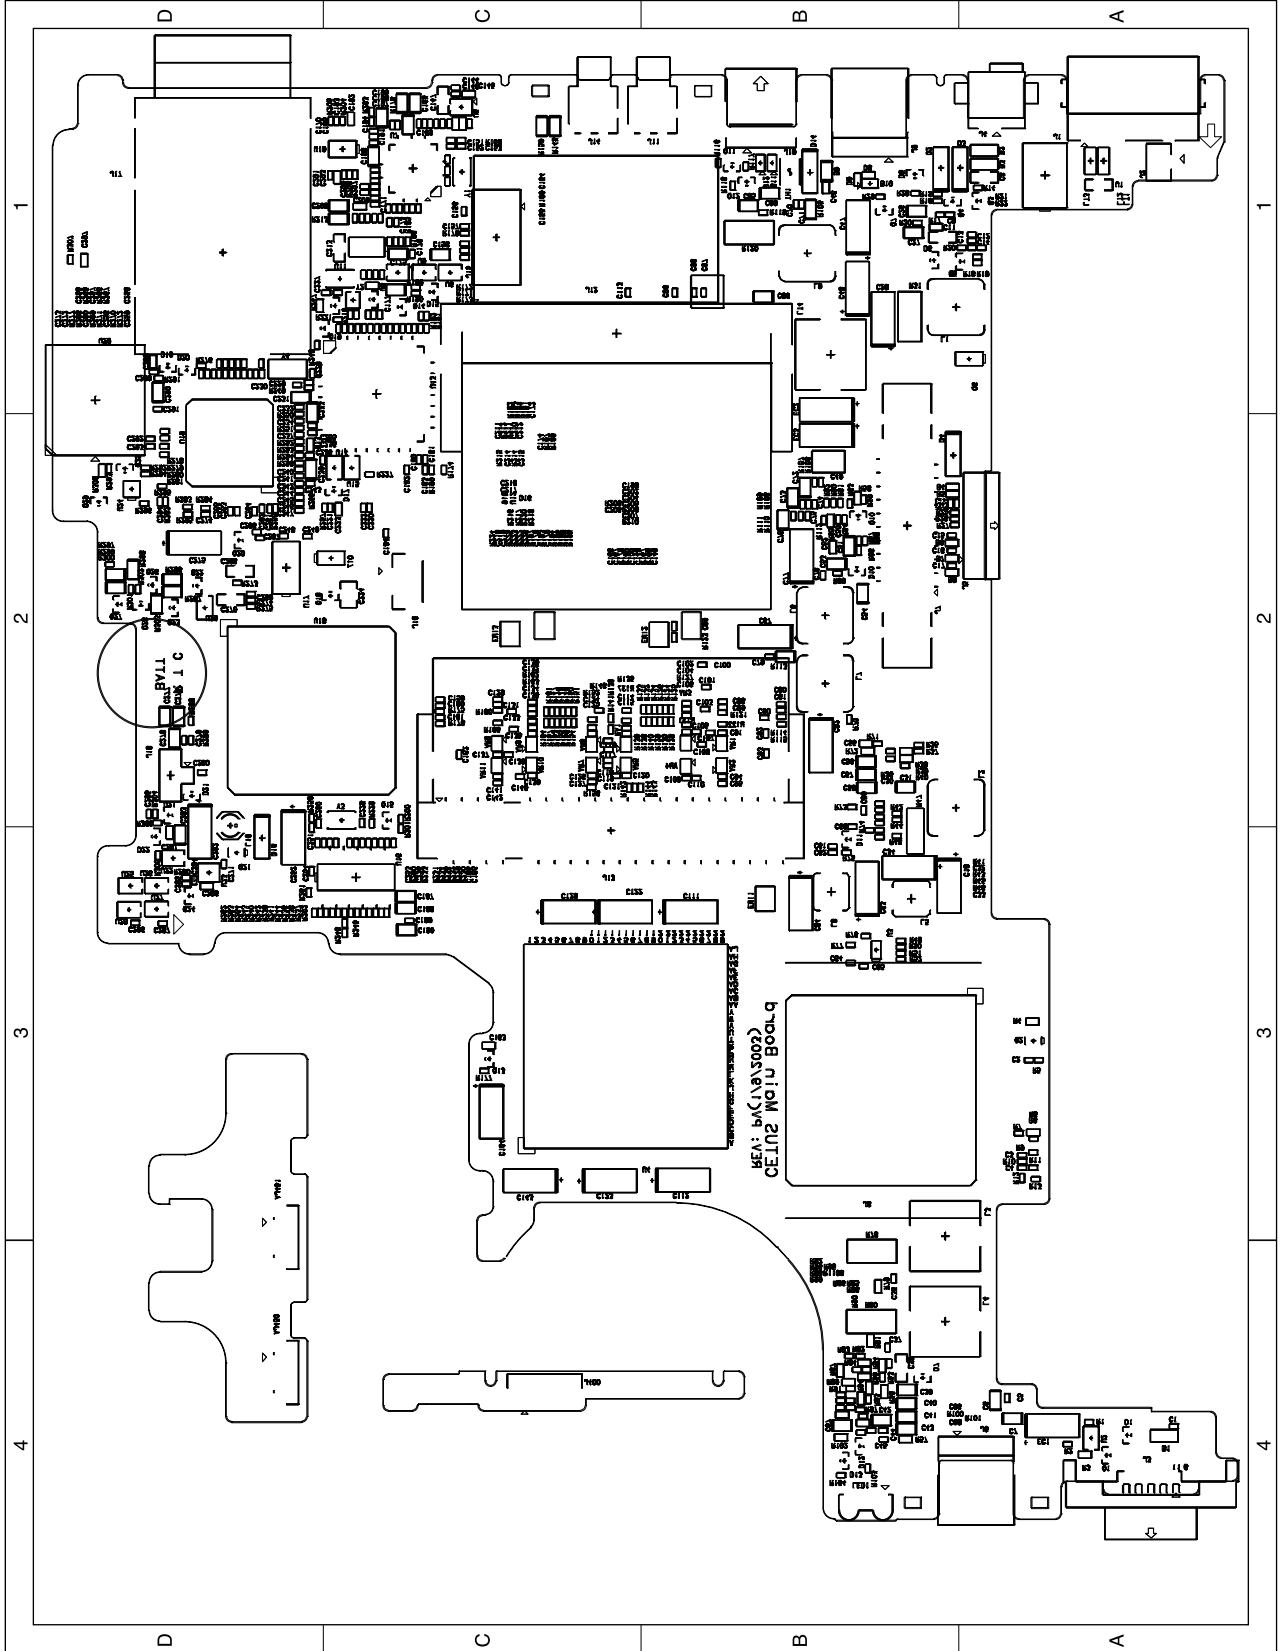

5-3 System Main Part List & Main Location Part List

Ref.	RART NO.	DESCRIPTION	SHEET	Loc.	SPECIFICATIONS
AJ450	3708-001276	CONNECTOR-FPC/FFC/PIC	cetus-39	4-B	12P,0.5MM,SMD-A,SN,ZIF,FLIP,BOTTOM
AJ451	3708-001276	CONNECTOR-FPC/FFC/PIC	cetus-39	4-C	12P,0.5MM,SMD-A,SN,ZIF,FLIP,BOTTOM
AR1-#	2011-001402	R-NET	cetus-13	1-B	560HM,5%,1/16W,L,CHIP,8P,TP
AR10-#	2011-001402	R-NET	cetus-13	2-B	560HM,5%,1/16W,L,CHIP,8P,TP
AR11-#	2011-001402	R-NET	cetus-13	2-C	560HM,5%,1/16W,L,CHIP,8P,TP
AR2-#	2011-001402	R-NET	cetus-13	1-B	560HM,5%,1/16W,L,CHIP,8P,TP
AR3-#	2011-001402	R-NET	cetus-13	1-C	560HM,5%,1/16W,L,CHIP,8P,TP
AR4-#	2011-001402	R-NET	cetus-13	1-C	560HM,5%,1/16W,L,CHIP,8P,TP
AR5-#	2011-001402	R-NET	cetus-13	1-C	560HM,5%,1/16W,L,CHIP,8P,TP
AR500-#	2011-001402	R-NET	cetus-13	1-B	560HM,5%,1/16W,L,CHIP,8P,TP
AR501-#	2011-001402	R-NET	cetus-13	1-C	560HM,5%,1/16W,L,CHIP,8P,TP
AR502-#	2011-001264	R-NET	cetus-13	3-C	10ohm,5%,1/16W,L,CHIP,8P,TP,2.0x1.0x0.35mm
AR503-#	2011-001264	R-NET	cetus-13	3-B	10ohm,5%,1/16W,L,CHIP,8P,TP,2.0x1.0x0.35mm
AR504-#	2011-001264	R-NET	cetus-13	3-C	10ohm,5%,1/16W,L,CHIP,8P,TP,2.0x1.0x0.35mm
AR505-#	2011-001264	R-NET	cetus-13	3-B	10ohm,5%,1/16W,L,CHIP,8P,TP,2.0x1.0x0.35mm
AR506-#	2011-001264	R-NET	cetus-13	3-D	10ohm,5%,1/16W,L,CHIP,8P,TP,2.0x1.0x0.35mm
AR507-#	2011-001264	R-NET	cetus-13	3-C	10ohm,5%,1/16W,L,CHIP,8P,TP,2.0x1.0x0.35mm
AR508-#	2011-001264	R-NET	cetus-13	3-C	10ohm,5%,1/16W,L,CHIP,8P,TP,2.0x1.0x0.35mm
AR509-#	2011-001264	R-NET	cetus-13	3-C	10ohm,5%,1/16W,L,CHIP,8P,TP,2.0x1.0x0.35mm
AR510-#	2011-001264	R-NET	cetus-13	4-B	10ohm,5%,1/16W,L,CHIP,8P,TP,2.0x1.0x0.35mm
AR511-#	2011-001264	R-NET	cetus-13	4-B	10ohm,5%,1/16W,L,CHIP,8P,TP,2.0x1.0x0.35mm
AR512-#	2011-001264	R-NET	cetus-13	4-C	10ohm,5%,1/16W,L,CHIP,8P,TP,2.0x1.0x0.35mm
AR513-#	2011-001264	R-NET	cetus-13	4-C	10ohm,5%,1/16W,L,CHIP,8P,TP,2.0x1.0x0.35mm
AR514-#	2011-001264	R-NET	cetus-13	4-D	10ohm,5%,1/16W,L,CHIP,8P,TP,2.0x1.0x0.35mm
AR515-#	2011-001264	R-NET	cetus-13	4-C	10ohm,5%,1/16W,L,CHIP,8P,TP,2.0x1.0x0.35mm
AR516-#	2011-001264	R-NET	cetus-13	4-C	10ohm,5%,1/16W,L,CHIP,8P,TP,2.0x1.0x0.35mm
AR517-#	2011-001402	R-NET	cetus-13	2-C	560HM,5%,1/16W,L,CHIP,8P,TP
AR6-#	2011-001402	R-NET	cetus-13	2-C	560HM,5%,1/16W,L,CHIP,8P,TP
AR7-#	2011-001402	R-NET	cetus-13	2-C	560HM,5%,1/16W,L,CHIP,8P,TP
AR8-#	2011-001402	R-NET	cetus-13	2-C	560HM,5%,1/16W,L,CHIP,8P,TP
AR9-#	2011-001402	R-NET	cetus-13	2-B	560HM,5%,1/16W,L,CHIP,8P,TP
ASW1100	3404-001052	SWITCH-TACT	cetus-39	3-B	12V,50mA,160gf,5.2x5.2x0.8mm,SPST
ASW1101	3404-001052	SWITCH-TACT	cetus-39	3-C	12V,50mA,160gf,5.2x5.2x0.8mm,SPST
B1	3301-000322	BEAD-SMD	cetus-19	1-D	31ohm,3216,500mA,TP,,,
B10	3301-001594	BEAD-SMD	cetus-28	4-C	90ohm,2.0x1.2x1.3mm,200mA,TP,,0.19ohm
B11	3301-001594	BEAD-SMD	cetus-20	1-D	90ohm,2.0x1.2x1.3mm,200mA,TP,,0.19ohm
B12	3301-001594	BEAD-SMD	cetus-20	1-D	90ohm,2.0x1.2x1.3mm,200mA,TP,,0.19ohm
B13	3301-001148	BEAD-SMD	cetus-20	2-D	60ohm,1.6x0.8x0.8mm,500mA,TP,,0.1ohm
B2	3301-001162	BEAD-SMD	cetus-31	4-D	68ohm,3.2x1.6x0.9mm,3000mA,TP,,0.012ohm

Ref.	RART NO.	DESCRIPTION	SHEET	Loc.	SPECIFICATIONS
B3	3301-001162	BEAD-SMD	cetus-31	4-D	68ohm,3.2x1.6x0.9mm,3000mA,TP,,,0.012ohm
B4	3301-001434	BEAD-SMD	cetus-33	1-C	27ohm,1608,4000mA,TP,,,0.006ohm
B5	3301-001434	BEAD-SMD	cetus-33	1-C	27ohm,1608,4000mA,TP,,,0.006ohm
B500	3301-001272	BEAD-SMD	cetus-22	3-B	120ohm,2x1.25x1mm,5000mA,TR,,,0.02ohm
B501	3301-001272	BEAD-SMD	cetus-22	3-B	120ohm,2x1.25x1mm,5000mA,TR,,,0.02ohm
B502	3301-001499	BEAD-SMD	cetus-19	2-D	75ohm,1608,,TP,76ohm/100MHZ,129ohm/600MHZ, 0.15ohm
B503	3301-001499	BEAD-SMD	cetus-19	2-D	75ohm,1608,,TP,76ohm/100MHZ,129ohm/600MHZ, 0.15ohm
B504	3301-001499	BEAD-SMD	cetus-19	2-D	75ohm,1608,,TP,76ohm/100MHZ,129ohm/600MHZ, 0.15ohm
B505	3301-001594	BEAD-SMD	cetus-28	4-B	90ohm,2.0x1.2x1.3mm,200mA,TP,,,0.19ohm
B506	3301-001434	BEAD-SMD	cetus-37	2-B	27ohm,1608,4000mA,TP,,,0.006ohm
B507	3301-001434	BEAD-SMD	cetus-37	2-B	27ohm,1608,4000mA,TP,,,0.006ohm
B508	3301-000326	BEAD-SMD	cetus-28	4-B	60,3225,1500,-,43OHM/40MHZ,83OHM/700MHZ, 30000
B509	3301-000326	BEAD-SMD	cetus-28	4-D	60,3225,1500,-,43OHM/40MHZ,83OHM/700MHZ, 30000
B510	3301-000317	BEAD-SMD	cetus-23	1-A	120ohm,2x1.25x0.9mm,200mA,TP,,,0.6ohm
B511	3301-000317	BEAD-SMD	cetus-23	1-A	120ohm,2x1.25x0.9mm,200mA,TP,,,0.6ohm
B512	3301-000314	BEAD-SMD	cetus-24	1-B	120ohm,1.6x0.8x0.8mm,150mA,,,,40000ohm
B513	3301-000314	BEAD-SMD	cetus-24	1-B	120ohm,1.6x0.8x0.8mm,150mA,,,,40000ohm
B514	3301-000314	BEAD-SMD	cetus-24	1-B	120ohm,1.6x0.8x0.8mm,150mA,,,,40000ohm
B515	3301-000314	BEAD-SMD	cetus-24	1-B	120ohm,1.6x0.8x0.8mm,150mA,,,,40000ohm
B516	3301-000314	BEAD-SMD	cetus-19	3-B	120ohm,1.6x0.8x0.8mm,150mA,,,,40000ohm
B517	3301-001101	BEAD-SMD	cetus-4	2-D	600ohm,2012,200mA,TP,,685ohm/158MHZ,0.3ohm
B518	3301-001101	BEAD-SMD	cetus-4	2-D	600ohm,2012,200mA,TP,,685ohm/158MHZ,0.3ohm
B519	3301-001101	BEAD-SMD	cetus-4	1-C	600ohm,2012,200mA,TP,,685ohm/158MHZ,0.3ohm
B520	3301-000326	BEAD-SMD	cetus-24	2-D	60,3225,1500,-,43OHM/40MHZ,83OHM/700MHZ, 30000
B522	3301-000314	BEAD-SMD	cetus-30	1-D	120ohm,1.6x0.8x0.8mm,150mA,,,,40000ohm
B523	3301-000314	BEAD-SMD	cetus-30	1-D	120ohm,1.6x0.8x0.8mm,150mA,,,,40000ohm
B524	3301-001233	BEAD-SMD	cetus-22	4-B	300ohm,1608,230mA,,,,0.35ohm
B6	3301-000314	BEAD-SMD	cetus-33	1-B	120ohm,1.6x0.8x0.8mm,150mA,,,,40000ohm
B7	3301-000314	BEAD-SMD	cetus-33	1-B	120ohm,1.6x0.8x0.8mm,150mA,,,,40000ohm
B8	3301-000314	BEAD-SMD	cetus-33	1-C	120ohm,1.6x0.8x0.8mm,150mA,,,,40000ohm
B9	3301-001101	BEAD-SMD	cetus-20	1-C	600ohm,2012,200mA,TP,,685ohm/158MHZ,0.3ohm
C1	2203-005482	C-CER,CHIP	cetus-19	1-D	100nF,10%,10V,X5R,TP,1005,-
C10	2203-005198	C-CER,CHIP	cetus-31	2-C	1uF,10%,10V,X5R,TP,2012,-

Ref.	RART NO.	DESCRIPTION	SHEET	Loc.	SPECIFICATIONS
C100	2203-000254	C-CER,CHIP	cetus-11	3-D	10nF,10%,16V,X7R,TP,1005,-
C1000	2203-005052	C-CER,CHIP	cetus-40	1-B	0.0033nF,0.25pF,50V,NP0,TP,1005
C1001	2203-000298	C-CER,CHIP	cetus-22	1-C	10000NF,+80-20%,16V,Y5V,TP,3225
C1002	2203-000298	C-CER,CHIP	cetus-22	1-C	10000NF,+80-20%,16V,Y5V,TP,3225
C1003	2203-000298	C-CER,CHIP	cetus-22	1-C	10000NF,+80-20%,16V,Y5V,TP,3225
C1004	2203-000628	C-CER,CHIP	cetus-40	1-D	0.022NF,5%,50V,C0G,TP,1005
C1005	2203-000628	C-CER,CHIP	cetus-40	1-B	0.022NF,5%,50V,C0G,TP,1005
C1006	2203-000330	C-CER,CHIP	cetus-40	1-D	0.012NF,5%,50V,C0G,TP,1005
C1007	2203-000233	C-CER,CHIP	cetus-40	1-D	0.1nF,5%,50V,C0G,-,1005
C1008	2203-000233	C-CER,CHIP	cetus-40	1-C	0.1nF,5%,50V,C0G,-,1005
C1009	2203-000995	C-CER,CHIP	cetus-37	1-D	0.047NF,5%,50V,C0G,TP,1005
C101	2203-000254	C-CER,CHIP	cetus-11	1-B	10nF,10%,16V,X7R,TP,1005,-
C1010	2203-000995	C-CER,CHIP	cetus-11	1-B	0.047NF,5%,50V,C0G,TP,1005
C1011	2203-000995	C-CER,CHIP	cetus-11	1-B	0.047NF,5%,50V,C0G,TP,1005
C1012	2203-000995	C-CER,CHIP	cetus-40	1-D	0.047NF,5%,50V,C0G,TP,1005
C1013	2203-000995	C-CER,CHIP	cetus-40	1-B	0.047NF,5%,50V,C0G,TP,1005
C102	2203-000254	C-CER,CHIP	cetus-14	1-B	10nF,10%,16V,X7R,TP,1005,-
C103	2203-000254	C-CER,CHIP	cetus-11	2-B	10nF,10%,16V,X7R,TP,1005,-
C104	2203-000254	C-CER,CHIP	cetus-14	1-B	10nF,10%,16V,X7R,TP,1005,-
C105	2203-005061	C-CER,CHIP	cetus-14	1-A	100nF,+80-20%,16V,Y5V,-,1005
C106	2203-000254	C-CER,CHIP	cetus-14	2-B	10nF,10%,16V,X7R,TP,1005,-
C107	2203-000254	C-CER,CHIP	cetus-14	2-B	10nF,10%,16V,X7R,TP,1005,-
C108	2203-000254	C-CER,CHIP	cetus-11	1-B	10nF,10%,16V,X7R,TP,1005,-
C109	2203-000254	C-CER,CHIP	cetus-14	2-B	10nF,10%,16V,X7R,TP,1005,-
C11	2203-005918	C-CER,CHIP	cetus-31	2-C	1000NF,10%,6.3V,X7R,TP,1608
C110	2203-005061	C-CER,CHIP	cetus-14	2-B	100nF,+80-20%,16V,Y5V,-,1005
C111	2402-001045	C-AL,SMD	cetus-10	4-D	47uF,20%,6.3V,GP,7343,-,TP
C112	2402-001045	C-AL,SMD	cetus-10	4-A	47uF,20%,6.3V,GP,7343,-,TP
C113	2203-005061	C-CER,CHIP	cetus-30	1-A	100nF,+80-20%,16V,Y5V,-,1005
C114	2203-000254	C-CER,CHIP	cetus-14	2-A	10nF,10%,16V,X7R,TP,1005,-
C115	2203-005061	C-CER,CHIP	cetus-14	1-B	100nF,+80-20%,16V,Y5V,-,1005
C116	2203-000254	C-CER,CHIP	cetus-11	1-D	10nF,10%,16V,X7R,TP,1005,-
C117	2203-000254	C-CER,CHIP	cetus-11	2-D	10nF,10%,16V,X7R,TP,1005,-
C118	2203-005061	C-CER,CHIP	cetus-14	2-B	100nF,+80-20%,16V,Y5V,-,1005
C119	2203-000254	C-CER,CHIP	cetus-14	1-B	10nF,10%,16V,X7R,TP,1005,-
C12	2203-000438	C-CER,CHIP	cetus-31	2-B	1nF,10%,50V,X7R,TP,1005,-
C120	2203-000254	C-CER,CHIP	cetus-14	1-B	10nF,10%,16V,X7R,TP,1005,-
C121	2203-005061	C-CER,CHIP	cetus-14	1-A	100nF,+80-20%,16V,Y5V,-,1005
C122	2402-001045	C-AL,SMD	cetus-10	4-D	47uF,20%,6.3V,GP,7343,-,TP

Ref.	RART NO.	DESCRIPTION	SHEET	Loc.	SPECIFICATIONS
C123	2402-001045	C-AL,SMD	cetus-10	4-A	47uF,20%,6.3V,GP,7343,-,TP
C124	2203-000254	C-CER,CHIP	cetus-14	1-B	10nF,10%,16V,X7R,TP,1005,-
C125	2203-005061	C-CER,CHIP	cetus-14	1-A	100nF,+80-20%,16V,Y5V,-,1005
C126	2203-005061	C-CER,CHIP	cetus-14	1-B	100nF,+80-20%,16V,Y5V,-,1005
C127	2203-000254	C-CER,CHIP	cetus-14	1-B	10nF,10%,16V,X7R,TP,1005,-
C128	2402-001167	C-POLYMER AL CHIP	cetus-10	4-B	82UF,20%,2.5V,WT,TP,7.3x4.3x1.8MM
C129	2203-005061	C-CER,CHIP	cetus-14	1-B	100nF,+80-20%,16V,Y5V,-,1005
C13	2203-005619	C-CER,CHIP	cetus-31	2-C	4700NF,10%,16V,X5R,TP,3216
C131	2203-005061	C-CER,CHIP	cetus-14	1-A	100nF,+80-20%,16V,Y5V,-,1005
C133	2203-000254	C-CER,CHIP	cetus-11	1-D	10nF,10%,16V,X7R,TP,1005,-
C134	2203-005061	C-CER,CHIP	cetus-14	1-B	100nF,+80-20%,16V,Y5V,-,1005
C135	2203-000254	C-CER,CHIP	cetus-11	2-B	10nF,10%,16V,X7R,TP,1005,-
C136	2203-000254	C-CER,CHIP	cetus-14	1-B	10nF,10%,16V,X7R,TP,1005,-
C137	2203-000254	C-CER,CHIP	cetus-14	2-A	10nF,10%,16V,X7R,TP,1005,-
C138	2203-005061	C-CER,CHIP	cetus-14	1-B	100nF,+80-20%,16V,Y5V,-,1005
C139	2203-000254	C-CER,CHIP	cetus-14	1-B	10nF,10%,16V,X7R,TP,1005,-
C14	2203-000438	C-CER,CHIP	cetus-31	2-B	1nF,10%,50V,X7R,TP,1005,-
C140	2203-005061	C-CER,CHIP	cetus-14	2-B	100nF,+80-20%,16V,Y5V,-,1005
C141	2203-000254	C-CER,CHIP	cetus-14	2-B	10nF,10%,16V,X7R,TP,1005,-
C142	2203-005061	C-CER,CHIP	cetus-14	1-B	100nF,+80-20%,16V,Y5V,-,1005
C143	2402-001167	C-POLYMER AL CHIP	cetus-10	4-D	82UF,20%,2.5V,WT,TP,7.3x4.3x1.8MM
C144	2203-005061	C-CER,CHIP	cetus-23	4-D	100nF,+80-20%,16V,Y5V,-,1005
C145	2203-005065	C-CER,CHIP	cetus-23	4-D	1000nF,+80-20%,10V,Y5V,-,1608
C146	2203-005061	C-CER,CHIP	cetus-23	3-D	100nF,+80-20%,16V,Y5V,-,1005
C147	2203-000513	C-CER,CHIP	cetus-23	3-D	2200NF,+80-20%,16V,Y5V,TP,3225
C149	2203-000438	C-CER,CHIP	cetus-24	4-A	1nF,10%,50V,X7R,TP,1005,-
C15	2203-000233	C-CER,CHIP	cetus-33	1-B	0.1nF,5%,50V,C0G,-,1005
C151	2203-006093	C-CER,CHIP	cetus-23	3-B	1000NF,+80-20%,6.3V,Y5V,TP,1005
C152	2203-000438	C-CER,CHIP	cetus-23	3-B	1nF,10%,50V,X7R,TP,1005,-
C153	2203-000940	C-CER,CHIP	cetus-23	3-D	0.47NF,10%,50V,X7R,TP,1005
C154	2203-000628	C-CER,CHIP	cetus-23	3-B	0.022NF,5%,50V,C0G,TP,1005
C155	2203-000628	C-CER,CHIP	cetus-23	4-B	0.022NF,5%,50V,C0G,TP,1005
C156	2203-005061	C-CER,CHIP	cetus-23	2-D	100nF,+80-20%,16V,Y5V,-,1005
C157	2203-005061	C-CER,CHIP	cetus-23	2-D	100nF,+80-20%,16V,Y5V,-,1005
C158	2203-005571	C-CER,CHIP	cetus-23	4-A	10000nF,+80-20%,6.3V,Y5V,-,2012
C16	2203-000233	C-CER,CHIP	cetus-33	1-B	0.1nF,5%,50V,C0G,-,1005
C161	2203-005061	C-CER,CHIP	cetus-11	3-A	100nF,+80-20%,16V,Y5V,-,1005
C162	2203-000254	C-CER,CHIP	cetus-11	1-B	10nF,10%,16V,X7R,TP,1005,-
C164	2402-001167	C-POLYMER AL CHIP	cetus-10	4-D	82UF,20%,2.5V,WT,TP,7.3x4.3x1.8MM

Ref.	RART NO.	DESCRIPTION	SHEET	Loc.	SPECIFICATIONS
C165	2203-005571	C-CER,CHIP	cetus-23	4-A	10000nF,+80-20%,6.3V,Y5V,-,2012
C166	2203-000438	C-CER,CHIP	cetus-23	3-C	1nF,10%,50V,X7R,TP,1005,-
C167	2203-000438	C-CER,CHIP	cetus-23	3-C	1nF,10%,50V,X7R,TP,1005,-
C168	2203-005061	C-CER,CHIP	cetus-23	4-C	100nF,+80-20%,16V,Y5V,-,1005
C169	2203-000476	C-CER,CHIP	cetus-23	4-C	1000nF,+80-20%,16V,Y5V,-,2012
C17	2203-000233	C-CER,CHIP	cetus-33	1-C	0.1nF,5%,50V,C0G,-,1005
C170	2203-005061	C-CER,CHIP	cetus-23	3-D	100nF,+80-20%,16V,Y5V,-,1005
C171	2203-005061	C-CER,CHIP	cetus-23	3-D	100nF,+80-20%,16V,Y5V,-,1005
C172	2203-005061	C-CER,CHIP	cetus-23	3-D	100nF,+80-20%,16V,Y5V,-,1005
C173	2203-005509	C-CER,CHIP	cetus-23	3-A	330nF,+80-20%,10V,Y5V,TP,1005
C174	2203-006093	C-CER,CHIP	cetus-23	3-C	1000NF,+80-20%,6.3V,Y5V,TP,1005
C175	2203-005571	C-CER,CHIP	cetus-23	2-D	10000nF,+80-20%,6.3V,Y5V,-,2012
C176	2203-005509	C-CER,CHIP	cetus-23	3-B	330nF,+80-20%,10V,Y5V,TP,1005
C177	2203-005198	C-CER,CHIP	cetus-26	4-C	1uF,10%,10V,X5R,TP,2012,-
C178	2203-005061	C-CER,CHIP	cetus-25	3-D	100nF,+80-20%,16V,Y5V,-,1005
C179	2203-005061	C-CER,CHIP	cetus-38	4-D	100nF,+80-20%,16V,Y5V,-,1005
C18	2402-001125	C-POLYMER AL CHIP	cetus-33	4-C	15UF,20%,25V,-,TP,7.3X4.3X1.9MM
C180	2203-005061	C-CER,CHIP	cetus-25	2-B	100nF,+80-20%,16V,Y5V,-,1005
C181	2203-002720	C-CER,CHIP	cetus-25	3-A	10nF,10%,25V,X7R,-,1005
C182	2203-005061	C-CER,CHIP	cetus-38	4-B	100nF,+80-20%,16V,Y5V,-,1005
C183	2203-005061	C-CER,CHIP	cetus-25	2-B	100nF,+80-20%,16V,Y5V,-,1005
C184	2203-000654	C-CER,CHIP	cetus-21	1-D	0.27NF,10%,50V,X7R,TP,1005
C185	2203-005061	C-CER,CHIP	cetus-4	2-D	100nF,+80-20%,16V,Y5V,-,1005
C186	2203-000254	C-CER,CHIP	cetus-4	2-D	10nF,10%,16V,X7R,TP,1005,-
C187	2203-005571	C-CER,CHIP	cetus-4	2-D	10000nF,+80-20%,6.3V,Y5V,-,2012
C188	2203-005571	C-CER,CHIP	cetus-4	2-D	10000nF,+80-20%,6.3V,Y5V,-,2012
C189	2203-005061	C-CER,CHIP	cetus-4	2-C	100nF,+80-20%,16V,Y5V,-,1005
C190	2203-005571	C-CER,CHIP	cetus-4	2-C	10000nF,+80-20%,6.3V,Y5V,-,2012
C191	2203-000476	C-CER,CHIP	cetus-23	4-C	1000nF,+80-20%,16V,Y5V,-,2012
C192	2203-005918	C-CER,CHIP	cetus-24	3-A	1000NF,10%,6.3V,X7R,TP,1608
C193	2203-000628	C-CER,CHIP	cetus-24	4-B	0.022NF,5%,50V,C0G,TP,1005
C194	2203-005061	C-CER,CHIP	cetus-23	4-C	100nF,+80-20%,16V,Y5V,-,1005
C195	2203-005493	C-CER,CHIP	cetus-23	3-C	220nF,+80-20%,16V,Y5V,TP,1005
C196	2203-005493	C-CER,CHIP	cetus-23	3-C	220nF,+80-20%,16V,Y5V,TP,1005
C197	2203-005493	C-CER,CHIP	cetus-23	3-C	220nF,+80-20%,16V,Y5V,TP,1005
C198	2203-005198	C-CER,CHIP	cetus-23	3-C	1uF,10%,10V,X5R,TP,2012,-
C199	2203-005493	C-CER,CHIP	cetus-23	3-C	220nF,+80-20%,16V,Y5V,TP,1005
C2	2203-005061	C-CER,CHIP	cetus-27	2-D	100nF,+80-20%,16V,Y5V,-,1005
C200	2203-000628	C-CER,CHIP	cetus-24	4-B	0.022NF,5%,50V,C0G,TP,1005

Ref.	RART NO.	DESCRIPTION	SHEET	Loc.	SPECIFICATIONS
C201	2203-000438	C-CER,CHIP	cetus-24	4-B	1nF,10%,50V,X7R,TP,1005,-
C202	2203-005493	C-CER,CHIP	cetus-23	3-C	220nF,+80-20%,16V,Y5V,TP,1005
C203	2203-005918	C-CER,CHIP	cetus-24	3-B	1000NF,10%,6.3V,X7R,TP,1608
C204	2203-005493	C-CER,CHIP	cetus-23	3-C	220nF,+80-20%,16V,Y5V,TP,1005
C205	2203-005493	C-CER,CHIP	cetus-23	3-C	220nF,+80-20%,16V,Y5V,TP,1005
C206	2203-005509	C-CER,CHIP	cetus-23	1-C	330nF,+80-20%,10V,Y5V,TP,1005
C207	2203-005509	C-CER,CHIP	cetus-23	3-C	330nF,+80-20%,10V,Y5V,TP,1005
C208	2203-005571	C-CER,CHIP	cetus-23	4-A	10000nF,+80-20%,6.3V,Y5V,-,2012
C209	2203-005065	C-CER,CHIP	cetus-24	2-D	1000nF,+80-20%,10V,Y5V,-,1608
C210	2203-000330	C-CER,CHIP	cetus-24	2-D	0.012NF,5%,50V,C0G,TP,1005
C211	2203-005509	C-CER,CHIP	cetus-24	2-C	330nF,+80-20%,10V,Y5V,TP,1005
C212	2203-005061	C-CER,CHIP	cetus-24	2-C	100nF,+80-20%,16V,Y5V,-,1005
C213	2203-005437	C-CER,CHIP	cetus-24	1-C	10000nF,+80-20%,10V,Y5V,TP,3216
C214	2203-000330	C-CER,CHIP	cetus-24	2-D	0.012NF,5%,50V,C0G,TP,1005
C215	2203-005061	C-CER,CHIP	cetus-24	1-C	100nF,+80-20%,16V,Y5V,-,1005
C216	2203-005065	C-CER,CHIP	cetus-24	2-D	1000nF,+80-20%,10V,Y5V,-,1608
C217	2203-000628	C-CER,CHIP	cetus-25	4-A	0.022NF,5%,50V,C0G,TP,1005
C218	2203-006093	C-CER,CHIP	cetus-25	3-D	1000NF,+80-20%,6.3V,Y5V,TP,1005
C219	2203-005061	C-CER,CHIP	cetus-25	3-D	100nF,+80-20%,16V,Y5V,-,1005
C220	2203-005061	C-CER,CHIP	cetus-25	3-A	100nF,+80-20%,16V,Y5V,-,1005
C221	2203-005061	C-CER,CHIP	cetus-25	2-B	100nF,+80-20%,16V,Y5V,-,1005
C222	2203-005061	C-CER,CHIP	cetus-25	3-D	100nF,+80-20%,16V,Y5V,-,1005
C223	2203-005148	C-CER,CHIP	cetus-19	3-A	100nF,10%,16V,X7R,TP,1608
C224	2203-000298	C-CER,CHIP	cetus-26	2-B	10000NF,+80-20%,16V,Y5V,TP,3225
C226	2203-005061	C-CER,CHIP	cetus-4	2-D	100nF,+80-20%,16V,Y5V,-,1005
C227	2203-000628	C-CER,CHIP	cetus-25	4-A	0.022NF,5%,50V,C0G,TP,1005
C228	2203-000278	C-CER,CHIP	cetus-20	2-C	0.01NF,0.5PF,50V,C0G,TP,1005
C229	2203-000278	C-CER,CHIP	cetus-25	3-C	0.01NF,0.5PF,50V,C0G,TP,1005
C230	2203-005061	C-CER,CHIP	cetus-20	2-A	100nF,+80-20%,16V,Y5V,-,1005
C231	2203-006090	C-CER,CHIP	cetus-20	2-B	10000nF,10%,6.3V,X5R,-,2012
C232	2203-000254	C-CER,CHIP	cetus-20	3-C	10nF,10%,16V,X7R,TP,1005,-
C233	2203-005198	C-CER,CHIP	cetus-21	4-A	1uF,10%,10V,X5R,TP,2012,-
C234	2203-000254	C-CER,CHIP	cetus-20	3-C	10nF,10%,16V,X7R,TP,1005,-
C235	2203-000254	C-CER,CHIP	cetus-20	2-D	10nF,10%,16V,X7R,TP,1005,-
C236	2203-000254	C-CER,CHIP	cetus-20	2-D	10nF,10%,16V,X7R,TP,1005,-
C237	2203-000654	C-CER,CHIP	cetus-20	2-C	0.27NF,10%,50V,X7R,TP,1005
C238	2203-005509	C-CER,CHIP	cetus-20	2-C	330nF,+80-20%,10V,Y5V,TP,1005
C239	2203-006090	C-CER,CHIP	cetus-20	3-B	10000nF,10%,6.3V,X5R,-,2012
C240	2203-000254	C-CER,CHIP	cetus-20	2-C	10nF,10%,16V,X7R,TP,1005,-

Ref.	RART NO.	DESCRIPTION	SHEET	Loc.	SPECIFICATIONS
C241	2203-005061	C-CER,CHIP	cetus-20	2-D	100nF,+80-20%,16V,Y5V,-,1005
C242	2203-005061	C-CER,CHIP	cetus-20	2-D	100nF,+80-20%,16V,Y5V,-,1005
C243	2203-005061	C-CER,CHIP	cetus-20	2-A	100nF,+80-20%,16V,Y5V,-,1005
C244	2203-000254	C-CER,CHIP	cetus-20	1-A	10nF,10%,16V,X7R,TP,1005,-
C245	2203-000254	C-CER,CHIP	cetus-20	2-A	10nF,10%,16V,X7R,TP,1005,-
C246	2203-000254	C-CER,CHIP	cetus-20	2-A	10nF,10%,16V,X7R,TP,1005,-
C247	2203-000254	C-CER,CHIP	cetus-20	1-A	10nF,10%,16V,X7R,TP,1005,-
C248	2203-005061	C-CER,CHIP	cetus-21	3-A	100nF,+80-20%,16V,Y5V,-,1005
C249	2203-000254	C-CER,CHIP	cetus-21	3-A	10nF,10%,16V,X7R,TP,1005,-
C251	2203-000278	C-CER,CHIP	cetus-16	4-C	0.01NF,0.5PF,50V,COG,TP,1005
C252	2402-001170	C-POLYMER AL CHIP	cetus-36	2-D	150UF,20%,6V,WT,TP,7.3x4.3x1.8MM
C253	2203-005061	C-CER,CHIP	cetus-4	2-D	100nF,+80-20%,16V,Y5V,-,1005
C254	2203-000254	C-CER,CHIP	cetus-4	2-D	10nF,10%,16V,X7R,TP,1005,-
C256	2203-000278	C-CER,CHIP	cetus-20	2-C	0.01NF,0.5PF,50V,COG,TP,1005
C257	2203-000654	C-CER,CHIP	cetus-20	1-D	0.27NF,10%,50V,X7R,TP,1005
C258	2203-005509	C-CER,CHIP	cetus-20	2-D	330nF,+80-20%,10V,Y5V,TP,1005
C259	2203-000254	C-CER,CHIP	cetus-20	2-C	10nF,10%,16V,X7R,TP,1005,-
C26	2203-000206	C-CER,CHIP	cetus-31	1-C	100nF,10%,50V,X7R,TP,2012
C260	2203-005061	C-CER,CHIP	cetus-20	2-A	100nF,+80-20%,16V,Y5V,-,1005
C261	2203-005061	C-CER,CHIP	cetus-21	2-A	100nF,+80-20%,16V,Y5V,-,1005
C262	2203-000254	C-CER,CHIP	cetus-21	2-D	10nF,10%,16V,X7R,TP,1005,-
C263	2203-005061	C-CER,CHIP	cetus-20	2-A	100nF,+80-20%,16V,Y5V,-,1005
C264	2203-005061	C-CER,CHIP	cetus-20	2-A	100nF,+80-20%,16V,Y5V,-,1005
C265	2203-005061	C-CER,CHIP	cetus-20	2-A	100nF,+80-20%,16V,Y5V,-,1005
C266	2203-000254	C-CER,CHIP	cetus-21	3-A	10nF,10%,16V,X7R,TP,1005,-
C267	2203-005061	C-CER,CHIP	cetus-21	3-A	100nF,+80-20%,16V,Y5V,-,1005
C268	2203-000483	C-CER,CHIP	cetus-21	4-A	1000nF,+80-20%,25V,Y5V,TP,3216
C269	2203-005061	C-CER,CHIP	cetus-15	2-A	100nF,+80-20%,16V,Y5V,-,1005
C27	2203-000206	C-CER,CHIP	cetus-31	2-D	100nF,10%,50V,X7R,TP,2012
C270	2203-006143	C-CER,CHIP	cetus-17	4-B	22000NF,20%,6.3V,X5R,TP,3216
C271	2203-005061	C-CER,CHIP	cetus-28	2-B	100nF,+80-20%,16V,Y5V,-,1005
C272	2203-005061	C-CER,CHIP	cetus-20	2-A	100nF,+80-20%,16V,Y5V,-,1005
C274	2203-000654	C-CER,CHIP	cetus-21	2-D	0.27NF,10%,50V,X7R,TP,1005
C278	2203-005198	C-CER,CHIP	cetus-17	3-D	1uF,10%,10V,X5R,TP,2012,-
C279	2203-005061	C-CER,CHIP	cetus-17	3-D	100nF,+80-20%,16V,Y5V,-,1005
C28	2402-001170	C-POLYMER AL CHIP	cetus-31	3-B	150UF,20%,6V,WT,TP,7.3x4.3x1.8MM
C280	2203-005061	C-CER,CHIP	cetus-38	4-B	100nF,+80-20%,16V,Y5V,-,1005
C281	2203-000062	C-CER,CHIP	cetus-17	1-D	47nF,+80-20%,50V,Y5V,TP,1608
C282	2402-001169	C-POLYMER AL CHIP	cetus-36	2-D	220UF,20%,4V,WT,TP,7.3x4.3x1.8MM

Ref.	RART NO.	DESCRIPTION	SHEET	Loc.	SPECIFICATIONS
C283	2203-000476	C-CER,CHIP	cetus-17	1-D	1000nF,+80-20%,16V,Y5V,-,2012
C284	2203-000233	C-CER,CHIP	cetus-36	3-D	0.1nF,5%,50V,COG,-,1005
C285	2203-000438	C-CER,CHIP	cetus-36	3-D	1nF,10%,50V,X7R,TP,1005,-
C286	2203-005655	C-CER,CHIP	cetus-36	3-D	1000nF,10%,6.3V,X5R,TP,1608
C287	2203-005061	C-CER,CHIP	cetus-27	3-C	100nF,+80-20%,16V,Y5V,-,1005
C288	2203-005655	C-CER,CHIP	cetus-21	4-D	1000nF,10%,6.3V,X5R,TP,1608
C289	2203-000254	C-CER,CHIP	cetus-21	4-D	10nF,10%,16V,X7R,TP,1005,-
C290	2203-006090	C-CER,CHIP	cetus-20	2-B	10000nF,10%,6.3V,X5R,-,2012
C291	2203-005061	C-CER,CHIP	cetus-20	2-A	100nF,+80-20%,16V,Y5V,-,1005
C292	2203-005061	C-CER,CHIP	cetus-20	3-A	100nF,+80-20%,16V,Y5V,-,1005
C293	2203-005061	C-CER,CHIP	cetus-20	2-C	100nF,+80-20%,16V,Y5V,-,1005
C294	2203-000278	C-CER,CHIP	cetus-20	4-B	0.01NF,0.5PF,50V,COG,TP,1005
C295	2203-005061	C-CER,CHIP	cetus-17	1-D	100nF,+80-20%,16V,Y5V,-,1005
C296	2203-000438	C-CER,CHIP	cetus-27	3-C	1nF,10%,50V,X7R,TP,1005,-
C297	2203-005148	C-CER,CHIP	cetus-19	2-A	100nF,10%,16V,X7R,TP,1608
C3	2203-000438	C-CER,CHIP	cetus-27	3-D	1nF,10%,50V,X7R,TP,1005,-
C30	2203-005482	C-CER,CHIP	cetus-33	3-B	100nF,10%,10V,X5R,TP,1005,-
C31	2203-000206	C-CER,CHIP	cetus-33	4-C	100nF,10%,50V,X7R,TP,2012
C32	2203-002720	C-CER,CHIP	cetus-35	3-C	10nF,10%,25V,X7R,-,1005
C33	2203-005482	C-CER,CHIP	cetus-35	3-B	100nF,10%,10V,X5R,TP,1005,-
C34	2402-001125	C-POLYMER AL CHIP	cetus-35	4-C	15UF,20%,25V,-,TP,7.3X4.3X1.9MM
C38	2203-000576	C-CER,CHIP	cetus-34	3-D	220nF,10%,50V,X7R,TP,3216
C39	2203-005664	C-CER,CHIP	cetus-34	2-D	4700nF,10%,6.3V,X5R,TP,2012
C4	2203-005061	C-CER,CHIP	cetus-27	3-D	100nF,+80-20%,16V,Y5V,-,1005
C40	2203-005198	C-CER,CHIP	cetus-34	3-C	1uF,10%,10V,X5R,TP,2012,-
C41	2203-005664	C-CER,CHIP	cetus-34	3-C	4700nF,10%,6.3V,X5R,TP,2012
C42	2203-005254	C-CER,CHIP	cetus-34	3-B	100nF,20%,50V,X7R,TP,2012,-
C43	2203-005198	C-CER,CHIP	cetus-34	3-C	1uF,10%,10V,X5R,TP,2012,-
C44	2203-000585	C-CER,CHIP	cetus-34	4-A	0.22NF,10%,50V,X7R,TP,1005
C45	2203-005061	C-CER,CHIP	cetus-27	2-D	100nF,+80-20%,16V,Y5V,-,1005
C46	2203-000189	C-CER,CHIP	cetus-20	1-C	100nF,+80-20%,25V,Y5V,TP,1608,
C47	2402-001125	C-POLYMER AL CHIP	cetus-31	1-D	15UF,20%,25V,-,TP,7.3X4.3X1.9MM
C49	2203-005261	C-CER,CHIP	cetus-36	2-B	1000nF,10%,25V,X7R,-,3216
C5	2203-005061	C-CER,CHIP	cetus-29	1-B	100nF,+80-20%,16V,Y5V,-,1005
C50	2203-000254	C-CER,CHIP	cetus-32	4-C	10nF,10%,16V,X7R,TP,1005,-
C500	2203-005052	C-CER,CHIP	cetus-19	2-D	0.0033nF,0.25pF,50V,NP0,TP,1005
C501	2203-005052	C-CER,CHIP	cetus-19	2-D	0.0033nF,0.25pF,50V,NP0,TP,1005
C502	2203-000585	C-CER,CHIP	cetus-19	2-C	0.22NF,10%,50V,X7R,TP,1005
C503	2203-005052	C-CER,CHIP	cetus-19	2-D	0.0033nF,0.25pF,50V,NP0,TP,1005

Ref.	RART NO.	DESCRIPTION	SHEET	Loc.	SPECIFICATIONS
C504	2203-000585	C-CER,CHIP	cetus-19	2-C	0.22NF,10%,50V,X7R,TP,1005
C505	2203-005052	C-CER,CHIP	cetus-19	2-D	0.0033nF,0.25pF,50V,NP0,TP,1005
C506	2203-005052	C-CER,CHIP	cetus-19	2-D	0.0033nF,0.25pF,50V,NP0,TP,1005
C507	2203-005052	C-CER,CHIP	cetus-19	2-D	0.0033nF,0.25pF,50V,NP0,TP,1005
C508	2203-000585	C-CER,CHIP	cetus-19	2-C	0.22NF,10%,50V,X7R,TP,1005
C509	2203-000585	C-CER,CHIP	cetus-19	2-C	0.22NF,10%,50V,X7R,TP,1005
C51	2203-005198	C-CER,CHIP	cetus-32	2-B	1uF,10%,10V,X5R,TP,2012,-
C511	2203-005571	C-CER,CHIP	cetus-6	4-D	1000nF,+80-20%,6.3V,Y5V,-,2012
C512	2203-005571	C-CER,CHIP	cetus-6	4-D	1000nF,+80-20%,6.3V,Y5V,-,2012
C513	2203-005571	C-CER,CHIP	cetus-27	3-C	1000nF,+80-20%,6.3V,Y5V,-,2012
C514	2203-005061	C-CER,CHIP	cetus-27	3-D	100nF,+80-20%,16V,Y5V,-,1005
C515	2203-000257	C-CER,CHIP	cetus-31	4-C	10nF,10%,50V,X7R,TP,1608
C516	2203-000206	C-CER,CHIP	cetus-31	4-C	100nF,10%,50V,X7R,TP,2012
C517	2203-000233	C-CER,CHIP	cetus-31	1-C	0.1nF,5%,50V,C0G,-,1005
C518	2203-000438	C-CER,CHIP	cetus-31	1-C	1nF,10%,50V,X7R,TP,1005,-
C519	2203-000438	C-CER,CHIP	cetus-31	1-B	1nF,10%,50V,X7R,TP,1005,-
C52	2203-000257	C-CER,CHIP	cetus-32	2-D	10nF,10%,50V,X7R,TP,1608
C520	2203-000585	C-CER,CHIP	cetus-31	1-B	0.22NF,10%,50V,X7R,TP,1005
C521	2203-000585	C-CER,CHIP	cetus-31	2-B	0.22NF,10%,50V,X7R,TP,1005
C522	2203-000438	C-CER,CHIP	cetus-31	2-C	1nF,10%,50V,X7R,TP,1005,-
C523	2203-002720	C-CER,CHIP	cetus-31	2-C	10nF,10%,25V,X7R,-,1005
C524	2203-000995	C-CER,CHIP	cetus-31	3-C	0.047NF,5%,50V,C0G,TP,1005
C525	2203-000438	C-CER,CHIP	cetus-31	2-C	1nF,10%,50V,X7R,TP,1005,-
C526	2203-000604	C-CER,CHIP	cetus-31	2-B	22nF,10%,25V,X7R,TP,1608
C527	2203-000206	C-CER,CHIP	cetus-31	3-D	100nF,10%,50V,X7R,TP,2012
C528	2402-001125	C-POLYMER AL CHIP	cetus-31	2-D	15UF,20%,25V,-,TP,7.3X4.3X1.9MM
C53	2203-000575	C-CER,CHIP	cetus-32	2-D	220NF,10%,25V,X7R,TP,2012
C530	2203-000206	C-CER,CHIP	cetus-33	2-C	100nF,10%,50V,X7R,TP,2012
C531	2402-001125	C-POLYMER AL CHIP	cetus-33	2-C	15UF,20%,25V,-,TP,7.3X4.3X1.9MM
C532	2402-001125	C-POLYMER AL CHIP	cetus-33	2-C	15UF,20%,25V,-,TP,7.3X4.3X1.9MM
C533	2203-001103	C-CER,CHIP	cetus-33	3-C	6.8nF,10%,50V,X7R,TP,1608,-
C534	2203-000206	C-CER,CHIP	cetus-33	3-C	100nF,10%,50V,X7R,TP,2012
C535	2203-005261	C-CER,CHIP	cetus-33	3-C	1000nF,10%,25V,X7R,-,3216
C536	2203-000254	C-CER,CHIP	cetus-6	3-D	10nF,10%,16V,X7R,TP,1005,-
C537	2203-005061	C-CER,CHIP	cetus-6	2-A	100nF,+80-20%,16V,Y5V,-,1005
C538	2203-005482	C-CER,CHIP	cetus-6	3-A	100nF,10%,10V,X5R,TP,1005,-
C539	2203-000254	C-CER,CHIP	cetus-6	4-D	10nF,10%,16V,X7R,TP,1005,-
C54	2203-000575	C-CER,CHIP	cetus-32	3-D	220NF,10%,25V,X7R,TP,2012
C540	2203-005482	C-CER,CHIP	cetus-6	4-A	100nF,10%,10V,X5R,TP,1005,-

Ref.	RART NO.	DESCRIPTION	SHEET	Loc.	SPECIFICATIONS
C541	2203-005482	C-CER,CHIP	cetus-6	4-A	100nF,10%,10V,X5R,TP,1005,-
C542	2203-005061	C-CER,CHIP	cetus-6	1-A	100nF,+80-20%,16V,Y5V,-,1005
C543	2203-006090	C-CER,CHIP	cetus-6	4-A	10000nF,10%,6.3V,X5R,-,2012
C544	2203-006090	C-CER,CHIP	cetus-6	4-A	10000nF,10%,6.3V,X5R,-,2012
C545	2402-001168	C-POLYMER AL CHIP	cetus-6	4-B	330UF,20%,2.5V,WT,TP,7.3x4.3x1.8MM
C546	2203-005061	C-CER,CHIP	cetus-28	3-B	100nF,+80-20%,16V,Y5V,-,1005
C547	2203-000995	C-CER,CHIP	cetus-28	3-D	0.047NF,5%,50V,C0G,TP,1005
C548	2203-000189	C-CER,CHIP	cetus-28	3-D	100nF,+80-20%,25V,Y5V,TP,1608,
C549	2203-000206	C-CER,CHIP	cetus-31	1-D	100nF,10%,50V,X7R,TP,2012
C55	2203-000140	C-CER,CHIP	cetus-33	2-B	1.5nF,10%,50V,X7R,TP,1608,-
C550	2203-000206	C-CER,CHIP	cetus-31	2-C	100nF,10%,50V,X7R,TP,2012
C551	2203-000189	C-CER,CHIP	cetus-37	1-B	100nF,+80-20%,25V,Y5V,TP,1608,
C552	2203-000233	C-CER,CHIP	cetus-33	1-D	0.1nF,5%,50V,C0G,-,1005
C553	2203-005482	C-CER,CHIP	cetus-37	2-D	100nF,10%,10V,X5R,TP,1005,-
C554	2203-005254	C-CER,CHIP	cetus-37	3-B	100nF,20%,50V,X7R,TP,2012,-
C555	2203-005254	C-CER,CHIP	cetus-37	3-B	100nF,20%,50V,X7R,TP,2012,-
C556	2203-002720	C-CER,CHIP	cetus-37	4-B	10nF,10%,25V,X7R,-,1005
C557	2203-002720	C-CER,CHIP	cetus-37	3-B	10nF,10%,25V,X7R,-,1005
C558	2203-000260	C-CER,CHIP	cetus-37	4-B	10nF,10%,50V,X7R,TP,2012
C559	2203-002720	C-CER,CHIP	cetus-37	4-B	10nF,10%,25V,X7R,-,1005
C56	2203-000206	C-CER,CHIP	cetus-33	2-B	100nF,10%,50V,X7R,TP,2012
C560	2203-001397	C-CER,CHIP	cetus-33	3-B	2.2nF,5%,50V,NP0,TP,1608
C561	2203-001662	C-CER,CHIP	cetus-33	3-B	5.6NF,10%,50V,X7R,TP,1608
C562	2203-000438	C-CER,CHIP	cetus-35	4-C	1nF,10%,50V,X7R,TP,1005,-
C563	2203-000575	C-CER,CHIP	cetus-35	3-C	220NF,10%,25V,X7R,TP,2012
C564	2203-005261	C-CER,CHIP	cetus-35	4-C	1000nF,10%,25V,X7R,-,3216
C565	2203-000206	C-CER,CHIP	cetus-35	4-C	100nF,10%,50V,X7R,TP,2012
C566	2203-001103	C-CER,CHIP	cetus-35	3-C	6.8nF,10%,50V,X7R,TP,1608,-
C568	2203-005482	C-CER,CHIP	cetus-6	4-A	100nF,10%,10V,X5R,TP,1005,-
C569	2203-005482	C-CER,CHIP	cetus-6	4-A	100nF,10%,10V,X5R,TP,1005,-
C57	2203-000206	C-CER,CHIP	cetus-33	3-B	100nF,10%,50V,X7R,TP,2012
C571	2203-006090	C-CER,CHIP	cetus-6	3-B	10000nF,10%,6.3V,X5R,-,2012
C572	2203-006090	C-CER,CHIP	cetus-6	3-B	10000nF,10%,6.3V,X5R,-,2012
C573	2203-006090	C-CER,CHIP	cetus-6	4-A	10000nF,10%,6.3V,X5R,-,2012
C574	2203-006090	C-CER,CHIP	cetus-6	4-B	10000nF,10%,6.3V,X5R,-,2012
C575	2203-006090	C-CER,CHIP	cetus-6	4-B	10000nF,10%,6.3V,X5R,-,2012
C576	2203-006090	C-CER,CHIP	cetus-6	4-A	10000nF,10%,6.3V,X5R,-,2012
C577	2203-006090	C-CER,CHIP	cetus-6	3-A	10000nF,10%,6.3V,X5R,-,2012
C578	2203-006090	C-CER,CHIP	cetus-6	3-A	10000nF,10%,6.3V,X5R,-,2012

Ref.	RART NO.	DESCRIPTION	SHEET	Loc.	SPECIFICATIONS
C579	2203-006090	C-CER,CHIP	cetus-6	4-B	10000nF,10%,6.3V,X5R,-,2012
C58	2203-000206	C-CER,CHIP	cetus-33	3-C	100nF,10%,50V,X7R,TP,2012
C580	2203-006090	C-CER,CHIP	cetus-6	3-B	10000nF,10%,6.3V,X5R,-,2012
C581	2203-006090	C-CER,CHIP	cetus-6	4-A	10000nF,10%,6.3V,X5R,-,2012
C582	2203-006090	C-CER,CHIP	cetus-6	2-A	10000nF,10%,6.3V,X5R,-,2012
C583	2203-006090	C-CER,CHIP	cetus-6	3-A	10000nF,10%,6.3V,X5R,-,2012
C584	2203-006090	C-CER,CHIP	cetus-6	3-A	10000nF,10%,6.3V,X5R,-,2012
C585	2203-006090	C-CER,CHIP	cetus-6	3-A	10000nF,10%,6.3V,X5R,-,2012
C586	2203-006090	C-CER,CHIP	cetus-6	4-B	10000nF,10%,6.3V,X5R,-,2012
C587	2402-001168	C-POLYMER AL CHIP	cetus-6	4-B	330UF,20%,2.5V,WT,TP,7.3x4.3x1.8MM
C588	2203-001103	C-CER,CHIP	cetus-34	2-C	6.8nF,10%,50V,X7R,TP,1608,-
C589	2203-000206	C-CER,CHIP	cetus-34	2-C	100nF,10%,50V,X7R,TP,2012
C59	2203-002720	C-CER,CHIP	cetus-35	2-C	10nF,10%,25V,X7R,-,1005
C590	2203-001103	C-CER,CHIP	cetus-34	2-D	6.8nF,10%,50V,X7R,TP,1608,-
C591	2203-000206	C-CER,CHIP	cetus-34	2-D	100nF,10%,50V,X7R,TP,2012
C592	2203-000576	C-CER,CHIP	cetus-34	2-C	220nF,10%,50V,X7R,TP,3216
C593	2203-000995	C-CER,CHIP	cetus-28	3-B	0.047NF,5%,50V,COG,TP,1005
C594	2203-006093	C-CER,CHIP	cetus-27	2-D	1000NF,+80-20%,6.3V,Y5V,TP,1005
C595	2203-005061	C-CER,CHIP	cetus-29	2-A	100nF,+80-20%,16V,Y5V,-,1005
C596	2203-005619	C-CER,CHIP	cetus-36	2-B	4700NF,10%,16V,X5R,TP,3216
C597	2203-000257	C-CER,CHIP	cetus-32	2-D	10nF,10%,50V,X7R,TP,1608
C598	2203-005664	C-CER,CHIP	cetus-32	1-C	4700nF,10%,6.3V,X5R,TP,2012
C599	2203-005148	C-CER,CHIP	cetus-32	2-D	100nF,10%,16V,X7R,TP,1608
C6	2203-005664	C-CER,CHIP	cetus-29	1-B	4700nF,10%,6.3V,X5R,TP,2012
C60	2203-005482	C-CER,CHIP	cetus-35	2-B	100nF,10%,10V,X5R,TP,1005,-
C600	2203-005619	C-CER,CHIP	cetus-32	2-D	4700NF,10%,16V,X5R,TP,3216
C601	2203-005261	C-CER,CHIP	cetus-32	3-D	1000nF,10%,25V,X7R,-,3216
C602	2203-001103	C-CER,CHIP	cetus-32	3-D	6.8nF,10%,50V,X7R,TP,1608,-
C603	2203-000206	C-CER,CHIP	cetus-32	2-D	100nF,10%,50V,X7R,TP,2012
C605	2203-005655	C-CER,CHIP	cetus-33	2-B	1000nF,10%,6.3V,X5R,TP,1608
C606	2203-002050	C-CER,CHIP	cetus-35	1-C	47nF,10%,50V,X7R,-,1608
C607	2203-005619	C-CER,CHIP	cetus-35	2-C	4700NF,10%,16V,X5R,TP,3216
C608	2402-001125	C-POLYMER AL CHIP	cetus-35	2-D	15UF,20%,25V,-,TP,7.3X4.3X1.9MM
C609	2203-001103	C-CER,CHIP	cetus-35	1-D	6.8nF,10%,50V,X7R,TP,1608,-
C61	2203-005482	C-CER,CHIP	cetus-35	3-C	100nF,10%,10V,X5R,TP,1005,-
C610	2203-000206	C-CER,CHIP	cetus-35	1-D	100nF,10%,50V,X7R,TP,2012
C611	2203-005261	C-CER,CHIP	cetus-35	2-D	1000nF,10%,25V,X7R,-,3216
C612	2203-005482	C-CER,CHIP	cetus-6	4-A	100nF,10%,10V,X5R,TP,1005,-
C613	2203-005482	C-CER,CHIP	cetus-6	3-A	100nF,10%,10V,X5R,TP,1005,-

Ref.	RART NO.	DESCRIPTION	SHEET	Loc.	SPECIFICATIONS
C614	2203-005482	C-CER,CHIP	cetus-6	4-A	100nF,10%,10V,X5R,TP,1005,-
C615	2203-006090	C-CER,CHIP	cetus-6	3-A	10000nF,10%,6.3V,X5R,-,2012
C616	2203-006090	C-CER,CHIP	cetus-6	3-A	10000nF,10%,6.3V,X5R,-,2012
C617	2203-006090	C-CER,CHIP	cetus-6	4-A	10000nF,10%,6.3V,X5R,-,2012
C618	2203-006090	C-CER,CHIP	cetus-6	3-B	10000nF,10%,6.3V,X5R,-,2012
C619	2203-005482	C-CER,CHIP	cetus-6	4-A	100nF,10%,10V,X5R,TP,1005,-
C62	2203-005482	C-CER,CHIP	cetus-35	2-C	100nF,10%,10V,X5R,TP,1005,-
C620	2203-005482	C-CER,CHIP	cetus-6	4-A	100nF,10%,10V,X5R,TP,1005,-
C621	2203-006090	C-CER,CHIP	cetus-6	4-B	10000nF,10%,6.3V,X5R,-,2012
C622	2203-006090	C-CER,CHIP	cetus-6	3-B	10000nF,10%,6.3V,X5R,-,2012
C623	2203-006090	C-CER,CHIP	cetus-6	4-A	10000nF,10%,6.3V,X5R,-,2012
C624	2203-006090	C-CER,CHIP	cetus-6	3-A	10000nF,10%,6.3V,X5R,-,2012
C625	2203-006090	C-CER,CHIP	cetus-6	4-A	10000nF,10%,6.3V,X5R,-,2012
C626	2203-006090	C-CER,CHIP	cetus-6	4-B	10000nF,10%,6.3V,X5R,-,2012
C627	2203-006090	C-CER,CHIP	cetus-6	4-B	10000nF,10%,6.3V,X5R,-,2012
C628	2203-006090	C-CER,CHIP	cetus-6	3-A	10000nF,10%,6.3V,X5R,-,2012
C629	2203-006090	C-CER,CHIP	cetus-6	3-A	10000nF,10%,6.3V,X5R,-,2012
C63	2402-001168	C-POLYMER AL CHIP	cetus-35	4-C	330UF,20%,2.5V,WT,TP,7.3x4.3x1.8MM
C630	2203-006090	C-CER,CHIP	cetus-6	4-B	10000nF,10%,6.3V,X5R,-,2012
C631	2203-006090	C-CER,CHIP	cetus-6	4-A	10000nF,10%,6.3V,X5R,-,2012
C632	2203-006090	C-CER,CHIP	cetus-6	4-B	10000nF,10%,6.3V,X5R,-,2012
C633	2203-006090	C-CER,CHIP	cetus-6	3-B	10000nF,10%,6.3V,X5R,-,2012
C634	2402-001168	C-POLYMER AL CHIP	cetus-6	4-B	330UF,20%,2.5V,WT,TP,7.3x4.3x1.8MM
C636	2402-001125	C-POLYMER AL CHIP	cetus-34	2-C	15UF,20%,25V,-,TP,7.3X4.3X1.9MM
C638	2402-001125	C-POLYMER AL CHIP	cetus-34	2-D	15UF,20%,25V,-,TP,7.3X4.3X1.9MM
C639	2203-001686	C-CER,CHIP	cetus-34	4-C	0.075nF,5%,50V,NP0,TP,1608
C64	2203-005061	C-CER,CHIP	cetus-5	3-B	100nF,+80-20%,16V,Y5V,-,1005
C640	2203-000438	C-CER,CHIP	cetus-34	4-C	1nF,10%,50V,X7R,TP,1005,-
C641	2203-000438	C-CER,CHIP	cetus-34	4-B	1nF,10%,50V,X7R,TP,1005,-
C642	2203-005437	C-CER,CHIP	cetus-27	2-D	10000nF,+80-20%,10V,Y5V,TP,3216
C643	2203-005664	C-CER,CHIP	cetus-29	2-A	4700nF,10%,6.3V,X5R,TP,2012
C644	2203-000254	C-CER,CHIP	cetus-26	4-A	10nF,10%,16V,X7R,TP,1005,-
C645	2203-000940	C-CER,CHIP	cetus-36	3-B	0.47NF,10%,50V,X7R,TP,1005
C647	2203-005061	C-CER,CHIP	cetus-30	2-D	100nF,+80-20%,16V,Y5V,-,1005
C648	2203-005061	C-CER,CHIP	cetus-29	3-D	100nF,+80-20%,16V,Y5V,-,1005
C65	2203-000489	C-CER,CHIP	cetus-5	2-A	2.2nF,10%,50V,X7R,TP,1005,-
C650	2402-001125	C-POLYMER AL CHIP	cetus-32	3-D	15UF,20%,25V,-,TP,7.3X4.3X1.9MM
C651	2203-005061	C-CER,CHIP	cetus-11	1-C	100nF,+80-20%,16V,Y5V,-,1005
C652	2203-001103	C-CER,CHIP	cetus-32	1-D	6.8nF,10%,50V,X7R,TP,1608,-

Ref.	RART NO.	DESCRIPTION	SHEET	Loc.	SPECIFICATIONS
C653	2203-005261	C-CER,CHIP	cetus-32	1-D	1000nF,10%,25V,X7R,-,3216
C654	2203-005619	C-CER,CHIP	cetus-32	1-D	4700NF,10%,16V,X5R,TP,3216
C655	2203-000254	C-CER,CHIP	cetus-14	2-B	10nF,10%,16V,X7R,TP,1005,-
C656	2203-005061	C-CER,CHIP	cetus-14	2-B	100nF,+80-20%,16V,Y5V,-,1005
C657	2203-005061	C-CER,CHIP	cetus-12	2-B	100nF,+80-20%,16V,Y5V,-,1005
C658	2203-000254	C-CER,CHIP	cetus-14	2-B	10nF,10%,16V,X7R,TP,1005,-
C659	2203-005061	C-CER,CHIP	cetus-14	1-B	100nF,+80-20%,16V,Y5V,-,1005
C66	2203-000233	C-CER,CHIP	cetus-34	3-B	0.1nF,5%,50V,COG,-,1005
C660	2203-005061	C-CER,CHIP	cetus-12	1-B	100nF,+80-20%,16V,Y5V,-,1005
C661	2203-000206	C-CER,CHIP	cetus-32	1-D	100nF,10%,50V,X7R,TP,2012
C662	2203-000575	C-CER,CHIP	cetus-35	2-C	220NF,10%,25V,X7R,TP,2012
C663	2203-005061	C-CER,CHIP	cetus-11	2-C	100nF,+80-20%,16V,Y5V,-,1005
C665	2203-005198	C-CER,CHIP	cetus-7	2-D	1uF,10%,10V,X5R,TP,2012,-
C666	2203-005198	C-CER,CHIP	cetus-7	1-D	1uF,10%,10V,X5R,TP,2012,-
C667	2203-005061	C-CER,CHIP	cetus-6	2-A	100nF,+80-20%,16V,Y5V,-,1005
C668	2203-000254	C-CER,CHIP	cetus-6	4-D	10nF,10%,16V,X7R,TP,1005,-
C669	2203-005571	C-CER,CHIP	cetus-6	4-D	10000nF,+80-20%,6.3V,Y5V,-,2012
C67	2203-000938	C-CER,CHIP	cetus-34	3-B	0.47NF,5%,50V,COG,TP,2012
C670	2203-005061	C-CER,CHIP	cetus-6	2-A	100nF,+80-20%,16V,Y5V,-,1005
C671	2203-005061	C-CER,CHIP	cetus-6	1-A	100nF,+80-20%,16V,Y5V,-,1005
C672	2203-000254	C-CER,CHIP	cetus-6	4-D	10nF,10%,16V,X7R,TP,1005,-
C673	2402-001168	C-POLYMER AL CHIP	cetus-6	4-B	330UF,20%,2.5V,WT,TP,7.3x4.3x1.8MM
C674	2203-000483	C-CER,CHIP	cetus-19	3-A	1000nF,+80-20%,25V,Y5V,TP,3216
C675	2402-001170	C-POLYMER AL CHIP	cetus-31	1-C	150UF,20%,6V,WT,TP,7.3x4.3x1.8MM
C677	2402-001170	C-POLYMER AL CHIP	cetus-26	3-A	150UF,20%,6V,WT,TP,7.3x4.3x1.8MM
C678	2203-005061	C-CER,CHIP	cetus-26	3-A	100nF,+80-20%,16V,Y5V,-,1005
C679	2203-005061	C-CER,CHIP	cetus-22	1-D	100nF,+80-20%,16V,Y5V,-,1005
C68	2203-000438	C-CER,CHIP	cetus-34	3-A	1nF,10%,50V,X7R,TP,1005,-
C680	2203-005061	C-CER,CHIP	cetus-30	3-D	100nF,+80-20%,16V,Y5V,-,1005
C681	2203-000628	C-CER,CHIP	cetus-22	4-C	0.022NF,5%,50V,COG,TP,1005
C682	2203-005061	C-CER,CHIP	cetus-29	3-D	100nF,+80-20%,16V,Y5V,-,1005
C683	2203-000278	C-CER,CHIP	cetus-29	3-C	0.01NF,0.5PF,50V,COG,TP,1005
C684	2203-005061	C-CER,CHIP	cetus-11	3-C	100nF,+80-20%,16V,Y5V,-,1005
C685	2203-005061	C-CER,CHIP	cetus-11	1-D	100nF,+80-20%,16V,Y5V,-,1005
C686	2203-005061	C-CER,CHIP	cetus-7	1-D	100nF,+80-20%,16V,Y5V,-,1005
C687	2203-005061	C-CER,CHIP	cetus-10	2-C	100nF,+80-20%,16V,Y5V,-,1005
C688	2203-005571	C-CER,CHIP	cetus-10	4-D	10000nF,+80-20%,6.3V,Y5V,-,2012
C689	2203-005061	C-CER,CHIP	cetus-10	2-C	100nF,+80-20%,16V,Y5V,-,1005
C69	2203-005254	C-CER,CHIP	cetus-19	3-A	100nF,20%,50V,X7R,TP,2012,-

Ref.	RART NO.	DESCRIPTION	SHEET	Loc.	SPECIFICATIONS
C690	2203-005482	C-CER,CHIP	cetus-7	4-C	100nF,10%,10V,X5R,TP,1005,-
C691	2203-005061	C-CER,CHIP	cetus-10	2-C	100nF,+80-20%,16V,Y5V,-,1005
C692	2203-005061	C-CER,CHIP	cetus-10	3-C	100nF,+80-20%,16V,Y5V,-,1005
C693	2203-005571	C-CER,CHIP	cetus-6	4-D	10000nF,+80-20%,6.3V,Y5V,-,2012
C694	2203-000438	C-CER,CHIP	cetus-23	1-A	1nF,10%,50V,X7R,TP,1005,-
C695	2203-005061	C-CER,CHIP	cetus-26	1-B	100nF,+80-20%,16V,Y5V,-,1005
C696	2203-005061	C-CER,CHIP	cetus-30	2-D	100nF,+80-20%,16V,Y5V,-,1005
C697	2203-000254	C-CER,CHIP	cetus-26	1-B	10nF,10%,16V,X7R,TP,1005,-
C698	2203-005061	C-CER,CHIP	cetus-38	4-D	100nF,+80-20%,16V,Y5V,-,1005
C699	2402-001170	C-POLYMER AL CHIP	cetus-26	1-B	150UF,20%,6V,WT,TP,7.3x4.3x1.8MM
C7	2203-005198	C-CER,CHIP	cetus-30	1-C	1uF,10%,10V,X5R,TP,2012,-
C70	2203-000254	C-CER,CHIP	cetus-20	1-C	10nF,10%,16V,X7R,TP,1005,-
C700	2203-005061	C-CER,CHIP	cetus-19	3-B	100nF,+80-20%,16V,Y5V,-,1005
C701	2203-005061	C-CER,CHIP	cetus-19	4-D	100nF,+80-20%,16V,Y5V,-,1005
C702	2203-005061	C-CER,CHIP	cetus-19	4-D	100nF,+80-20%,16V,Y5V,-,1005
C703	2203-005061	C-CER,CHIP	cetus-19	3-B	100nF,+80-20%,16V,Y5V,-,1005
C704	2203-005437	C-CER,CHIP	cetus-30	3-D	10000nF,+80-20%,10V,Y5V,TP,3216
C705	2203-005061	C-CER,CHIP	cetus-30	1-A	100nF,+80-20%,16V,Y5V,-,1005
C706	2203-005061	C-CER,CHIP	cetus-30	3-D	100nF,+80-20%,16V,Y5V,-,1005
C707	2203-005061	C-CER,CHIP	cetus-22	1-D	100nF,+80-20%,16V,Y5V,-,1005
C708	2203-005061	C-CER,CHIP	cetus-22	1-C	100nF,+80-20%,16V,Y5V,-,1005
C709	2203-005061	C-CER,CHIP	cetus-22	1-C	100nF,+80-20%,16V,Y5V,-,1005
C71	2203-000438	C-CER,CHIP	cetus-20	1-C	1nF,10%,50V,X7R,TP,1005,-
C710	2203-005061	C-CER,CHIP	cetus-22	1-C	100nF,+80-20%,16V,Y5V,-,1005
C711	2203-005061	C-CER,CHIP	cetus-22	1-D	100nF,+80-20%,16V,Y5V,-,1005
C712	2203-005061	C-CER,CHIP	cetus-22	1-C	100nF,+80-20%,16V,Y5V,-,1005
C713	2203-005061	C-CER,CHIP	cetus-22	1-D	100nF,+80-20%,16V,Y5V,-,1005
C714	2203-005061	C-CER,CHIP	cetus-22	1-C	100nF,+80-20%,16V,Y5V,-,1005
C715	2203-005061	C-CER,CHIP	cetus-22	1-D	100nF,+80-20%,16V,Y5V,-,1005
C716	2203-005061	C-CER,CHIP	cetus-22	1-C	100nF,+80-20%,16V,Y5V,-,1005
C717	2203-005061	C-CER,CHIP	cetus-22	1-D	100nF,+80-20%,16V,Y5V,-,1005
C718	2203-000628	C-CER,CHIP	cetus-22	4-C	0.022NF,5%,50V,C0G,TP,1005
C719	2203-005061	C-CER,CHIP	cetus-29	3-D	100nF,+80-20%,16V,Y5V,-,1005
C72	2203-000476	C-CER,CHIP	cetus-23	3-A	1000nF,+80-20%,16V,Y5V,-,2012
C720	2203-000278	C-CER,CHIP	cetus-29	3-C	0.01NF,0.5PF,50V,C0G,TP,1005
C721	2203-005061	C-CER,CHIP	cetus-11	1-C	100nF,+80-20%,16V,Y5V,-,1005
C722	2203-005061	C-CER,CHIP	cetus-12	1-B	100nF,+80-20%,16V,Y5V,-,1005
C723	2203-005061	C-CER,CHIP	cetus-12	2-B	100nF,+80-20%,16V,Y5V,-,1005
C724	2203-005061	C-CER,CHIP	cetus-11	3-C	100nF,+80-20%,16V,Y5V,-,1005

Ref.	RART NO.	DESCRIPTION	SHEET	Loc.	SPECIFICATIONS
C725	2203-005061	C-CER,CHIP	cetus-12	1-B	100nF,+80-20%,16V,Y5V,-,1005
C726	2203-005061	C-CER,CHIP	cetus-12	1-B	100nF,+80-20%,16V,Y5V,-,1005
C727	2203-005061	C-CER,CHIP	cetus-11	2-C	100nF,+80-20%,16V,Y5V,-,1005
C728	2203-005061	C-CER,CHIP	cetus-11	2-C	100nF,+80-20%,16V,Y5V,-,1005
C729	2203-005061	C-CER,CHIP	cetus-11	1-D	100nF,+80-20%,16V,Y5V,-,1005
C73	2203-001598	C-CER,CHIP	cetus-23	3-A	2200nF,+80-20%,16V,Y5V,TP,2012
C730	2203-005061	C-CER,CHIP	cetus-8	3-A	100nF,+80-20%,16V,Y5V,-,1005
C731	2203-005061	C-CER,CHIP	cetus-8	3-A	100nF,+80-20%,16V,Y5V,-,1005
C732	2203-005061	C-CER,CHIP	cetus-10	4-D	100nF,+80-20%,16V,Y5V,-,1005
C733	2203-005061	C-CER,CHIP	cetus-10	4-D	100nF,+80-20%,16V,Y5V,-,1005
C734	2203-005061	C-CER,CHIP	cetus-7	2-D	100nF,+80-20%,16V,Y5V,-,1005
C735	2203-005061	C-CER,CHIP	cetus-10	4-D	100nF,+80-20%,16V,Y5V,-,1005
C736	2203-005061	C-CER,CHIP	cetus-10	4-D	100nF,+80-20%,16V,Y5V,-,1005
C737	2203-005061	C-CER,CHIP	cetus-7	2-C	100nF,+80-20%,16V,Y5V,-,1005
C738	2203-005061	C-CER,CHIP	cetus-10	2-C	100nF,+80-20%,16V,Y5V,-,1005
C739	2203-005061	C-CER,CHIP	cetus-10	2-C	100nF,+80-20%,16V,Y5V,-,1005
C74	2203-000995	C-CER,CHIP	cetus-23	3-A	0.047NF,5%,50V,C0G,TP,1005
C740	2402-001167	C-POLYMER AL CHIP	cetus-10	4-B	82UF,20%,2.5V,WT,TP,7.3x4.3x1.8MM
C741	2203-000438	C-CER,CHIP	cetus-23	2-B	1nF,10%,50V,X7R,TP,1005,-
C742	2203-005437	C-CER,CHIP	cetus-23	2-B	10000nF,+80-20%,10V,Y5V,TP,3216
C743	2203-005198	C-CER,CHIP	cetus-23	2-A	1uF,10%,10V,X5R,TP,2012,-
C744	2203-005061	C-CER,CHIP	cetus-38	4-C	100nF,+80-20%,16V,Y5V,-,1005
C745	2203-000206	C-CER,CHIP	cetus-26	2-C	100nF,10%,50V,X7R,TP,2012
C746	2402-001169	C-POLYMER AL CHIP	cetus-12	2-B	220UF,20%,4V,WT,TP,7.3x4.3x1.8MM
C749	2203-005061	C-CER,CHIP	cetus-11	2-C	100nF,+80-20%,16V,Y5V,-,1005
C75	2203-000995	C-CER,CHIP	cetus-23	3-A	0.047NF,5%,50V,C0G,TP,1005
C750	2203-005061	C-CER,CHIP	cetus-12	2-B	100nF,+80-20%,16V,Y5V,-,1005
C751	2203-005061	C-CER,CHIP	cetus-12	2-B	100nF,+80-20%,16V,Y5V,-,1005
C752	2203-005061	C-CER,CHIP	cetus-12	2-B	100nF,+80-20%,16V,Y5V,-,1005
C753	2203-005061	C-CER,CHIP	cetus-12	2-B	100nF,+80-20%,16V,Y5V,-,1005
C754	2203-000254	C-CER,CHIP	cetus-14	1-B	10nF,10%,16V,X7R,TP,1005,-
C755	2203-005061	C-CER,CHIP	cetus-14	1-B	100nF,+80-20%,16V,Y5V,-,1005
C756	2203-000254	C-CER,CHIP	cetus-14	1-A	10nF,10%,16V,X7R,TP,1005,-
C757	2203-005061	C-CER,CHIP	cetus-14	1-B	100nF,+80-20%,16V,Y5V,-,1005
C758	2203-000254	C-CER,CHIP	cetus-14	2-B	10nF,10%,16V,X7R,TP,1005,-
C759	2203-005061	C-CER,CHIP	cetus-12	2-B	100nF,+80-20%,16V,Y5V,-,1005
C76	2203-000476	C-CER,CHIP	cetus-23	3-A	1000nF,+80-20%,16V,Y5V,-,2012
C760	2203-005061	C-CER,CHIP	cetus-14	1-B	100nF,+80-20%,16V,Y5V,-,1005
C761	2203-005061	C-CER,CHIP	cetus-8	3-A	100nF,+80-20%,16V,Y5V,-,1005

Ref.	RART NO.	DESCRIPTION	SHEET	Loc.	SPECIFICATIONS
C762	2203-005061	C-CER,CHIP	cetus-10	4-D	100nF,+80-20%,16V,Y5V,-,1005
C763	2203-005061	C-CER,CHIP	cetus-10	3-D	100nF,+80-20%,16V,Y5V,-,1005
C764	2203-005061	C-CER,CHIP	cetus-10	3-D	100nF,+80-20%,16V,Y5V,-,1005
C765	2203-005061	C-CER,CHIP	cetus-10	4-D	100nF,+80-20%,16V,Y5V,-,1005
C766	2203-005571	C-CER,CHIP	cetus-10	4-D	10000nF,+80-20%,6.3V,Y5V,-,2012
C767	2203-005571	C-CER,CHIP	cetus-10	4-C	10000nF,+80-20%,6.3V,Y5V,-,2012
C768	2203-005061	C-CER,CHIP	cetus-10	3-D	100nF,+80-20%,16V,Y5V,-,1005
C769	2203-005061	C-CER,CHIP	cetus-10	4-C	100nF,+80-20%,16V,Y5V,-,1005
C770	2402-001167	C-POLYMER AL CHIP	cetus-10	4-D	82UF,20%,2.5V,WT,TP,7.3x4.3x1.8MM
C771	2203-005061	C-CER,CHIP	cetus-10	3-D	100nF,+80-20%,16V,Y5V,-,1005
C772	2203-005061	C-CER,CHIP	cetus-10	3-D	100nF,+80-20%,16V,Y5V,-,1005
C773	2203-005571	C-CER,CHIP	cetus-10	4-C	10000nF,+80-20%,6.3V,Y5V,-,2012
C774	2203-005198	C-CER,CHIP	cetus-7	1-C	1uF,10%,10V,X5R,TP,2012,-
C775	2203-006143	C-CER,CHIP	cetus-10	3-A	22000NF,20%,6.3V,X5R,TP,3216
C776	2203-000278	C-CER,CHIP	cetus-9	1-B	0.01NF,0.5PF,50V,COG,TP,1005
C777	2203-005482	C-CER,CHIP	cetus-7	4-C	100nF,10%,10V,X5R,TP,1005,-
C778	2203-005061	C-CER,CHIP	cetus-10	4-A	100nF,+80-20%,16V,Y5V,-,1005
C779	2203-005061	C-CER,CHIP	cetus-10	3-A	100nF,+80-20%,16V,Y5V,-,1005
C78	2203-005482	C-CER,CHIP	cetus-32	2-D	100nF,10%,10V,X5R,TP,1005,-
C780	2203-005061	C-CER,CHIP	cetus-10	4-B	100nF,+80-20%,16V,Y5V,-,1005
C781	2203-000254	C-CER,CHIP	cetus-10	3-B	10nF,10%,16V,X7R,TP,1005,-
C782	2203-000438	C-CER,CHIP	cetus-24	1-B	1nF,10%,50V,X7R,TP,1005,-
C783	2203-000233	C-CER,CHIP	cetus-24	1-B	0.1nF,5%,50V,COG,-,1005
C784	2203-005061	C-CER,CHIP	cetus-38	4-C	100nF,+80-20%,16V,Y5V,-,1005
C785	2203-005061	C-CER,CHIP	cetus-38	4-C	100nF,+80-20%,16V,Y5V,-,1005
C786	2203-005061	C-CER,CHIP	cetus-30	1-A	100nF,+80-20%,16V,Y5V,-,1005
C787	2203-005061	C-CER,CHIP	cetus-30	1-A	100nF,+80-20%,16V,Y5V,-,1005
C788	2203-005437	C-CER,CHIP	cetus-30	3-D	10000nF,+80-20%,10V,Y5V,TP,3216
C789	2203-005061	C-CER,CHIP	cetus-26	1-C	100nF,+80-20%,16V,Y5V,-,1005
C790	2203-005437	C-CER,CHIP	cetus-26	1-C	10000nF,+80-20%,10V,Y5V,TP,3216
C791	2203-005148	C-CER,CHIP	cetus-33	2-B	100nF,10%,16V,X7R,TP,1608
C792	2402-001169	C-POLYMER AL CHIP	cetus-12	2-B	220UF,20%,4V,WT,TP,7.3x4.3x1.8MM
C793	2203-005061	C-CER,CHIP	cetus-12	1-B	100nF,+80-20%,16V,Y5V,-,1005
C794	2203-005061	C-CER,CHIP	cetus-11	1-D	100nF,+80-20%,16V,Y5V,-,1005
C795	2203-005061	C-CER,CHIP	cetus-11	3-D	100nF,+80-20%,16V,Y5V,-,1005
C796	2203-005061	C-CER,CHIP	cetus-11	2-D	100nF,+80-20%,16V,Y5V,-,1005
C797	2203-005061	C-CER,CHIP	cetus-11	1-C	100nF,+80-20%,16V,Y5V,-,1005
C798	2203-005061	C-CER,CHIP	cetus-11	1-D	100nF,+80-20%,16V,Y5V,-,1005
C799	2203-005664	C-CER,CHIP	cetus-10	4-B	4700nF,10%,6.3V,X5R,TP,2012

Ref.	RART NO.	DESCRIPTION	SHEET	Loc.	SPECIFICATIONS
C8	2203-005261	C-CER,CHIP	cetus-31	4-C	1000nF,10%,25V,X7R,-,3216
C80	2203-005061	C-CER,CHIP	cetus-14	1-A	100nF,+80-20%,16V,Y5V,-,1005
C800	2203-005061	C-CER,CHIP	cetus-10	4-B	100nF,+80-20%,16V,Y5V,-,1005
C801	2203-005061	C-CER,CHIP	cetus-10	3-D	100nF,+80-20%,16V,Y5V,-,1005
C802	2203-005061	C-CER,CHIP	cetus-10	4-D	100nF,+80-20%,16V,Y5V,-,1005
C803	2203-005061	C-CER,CHIP	cetus-10	4-D	100nF,+80-20%,16V,Y5V,-,1005
C804	2203-005061	C-CER,CHIP	cetus-10	3-D	100nF,+80-20%,16V,Y5V,-,1005
C805	2203-005061	C-CER,CHIP	cetus-10	3-D	100nF,+80-20%,16V,Y5V,-,1005
C806	2203-005061	C-CER,CHIP	cetus-10	4-D	100nF,+80-20%,16V,Y5V,-,1005
C807	2203-005061	C-CER,CHIP	cetus-10	4-C	100nF,+80-20%,16V,Y5V,-,1005
C809	2203-005061	C-CER,CHIP	cetus-10	4-C	100nF,+80-20%,16V,Y5V,-,1005
C81	2203-000254	C-CER,CHIP	cetus-14	1-B	10nF,10%,16V,X7R,TP,1005,-
C810	2203-005061	C-CER,CHIP	cetus-10	4-C	100nF,+80-20%,16V,Y5V,-,1005
C811	2203-005061	C-CER,CHIP	cetus-10	4-A	100nF,+80-20%,16V,Y5V,-,1005
C812	2203-005061	C-CER,CHIP	cetus-10	3-B	100nF,+80-20%,16V,Y5V,-,1005
C813	2203-000278	C-CER,CHIP	cetus-9	1-B	0.01NF,0.5PF,50V,C0G,TP,1005
C814	2203-005061	C-CER,CHIP	cetus-10	4-A	100nF,+80-20%,16V,Y5V,-,1005
C815	2203-005061	C-CER,CHIP	cetus-10	4-B	100nF,+80-20%,16V,Y5V,-,1005
C816	2203-000254	C-CER,CHIP	cetus-10	3-B	10nF,10%,16V,X7R,TP,1005,-
C817	2203-005061	C-CER,CHIP	cetus-10	3-B	100nF,+80-20%,16V,Y5V,-,1005
C818	2203-005061	C-CER,CHIP	cetus-10	3-B	100nF,+80-20%,16V,Y5V,-,1005
C819	2203-006143	C-CER,CHIP	cetus-10	4-A	22000NF,20%,6.3V,X5R,TP,3216
C82	2402-001168	C-POLYMER AL CHIP	cetus-32	1-C	330UF,20%,2.5V,WT,TP,7.3x4.3x1.8MM
C820	2203-000233	C-CER,CHIP	cetus-24	1-B	0.1nF,5%,50V,C0G,-,1005
C821	2203-005061	C-CER,CHIP	cetus-19	3-B	100nF,+80-20%,16V,Y5V,-,1005
C822	2203-000278	C-CER,CHIP	cetus-30	4-C	0.01NF,0.5PF,50V,C0G,TP,1005
C823	2203-005061	C-CER,CHIP	cetus-38	3-B	100nF,+80-20%,16V,Y5V,-,1005
C824	2203-005061	C-CER,CHIP	cetus-38	4-D	100nF,+80-20%,16V,Y5V,-,1005
C825	2203-005437	C-CER,CHIP	cetus-30	4-D	10000nF,+80-20%,10V,Y5V,TP,3216
C826	2203-005061	C-CER,CHIP	cetus-12	1-B	100nF,+80-20%,16V,Y5V,-,1005
C827	2203-000254	C-CER,CHIP	cetus-11	2-D	10nF,10%,16V,X7R,TP,1005,-
C828	2203-000254	C-CER,CHIP	cetus-11	2-B	10nF,10%,16V,X7R,TP,1005,-
C829	2203-005061	C-CER,CHIP	cetus-12	1-B	100nF,+80-20%,16V,Y5V,-,1005
C830	2203-005061	C-CER,CHIP	cetus-11	2-A	100nF,+80-20%,16V,Y5V,-,1005
C831	2203-005061	C-CER,CHIP	cetus-12	1-B	100nF,+80-20%,16V,Y5V,-,1005
C832	2203-005061	C-CER,CHIP	cetus-12	1-B	100nF,+80-20%,16V,Y5V,-,1005
C833	2203-005061	C-CER,CHIP	cetus-12	1-B	100nF,+80-20%,16V,Y5V,-,1005
C834	2203-000254	C-CER,CHIP	cetus-11	3-B	10nF,10%,16V,X7R,TP,1005,-
C835	2203-005061	C-CER,CHIP	cetus-11	2-D	100nF,+80-20%,16V,Y5V,-,1005

Ref.	RART NO.	DESCRIPTION	SHEET	Loc.	SPECIFICATIONS
C836	2203-005061	C-CER,CHIP	cetus-11	1-C	100nF,+80-20%,16V,Y5V,-,1005
C837	2203-005061	C-CER,CHIP	cetus-10	4-B	100nF,+80-20%,16V,Y5V,-,1005
C838	2203-005061	C-CER,CHIP	cetus-8	1-C	100nF,+80-20%,16V,Y5V,-,1005
C839	2203-000278	C-CER,CHIP	cetus-9	3-A	0.01NF,0.5PF,50V,C0G,TP,1005
C84	2402-001168	C-POLYMER AL CHIP	cetus-35	1-C	330UF,20%,2.5V,WT,TP,7.3x4.3x1.8MM
C840	2203-005061	C-CER,CHIP	cetus-7	1-B	100nF,+80-20%,16V,Y5V,-,1005
C841	2203-000254	C-CER,CHIP	cetus-7	1-B	10nF,10%,16V,X7R,TP,1005,-
C842	2203-005061	C-CER,CHIP	cetus-10	3-C	100nF,+80-20%,16V,Y5V,-,1005
C843	2203-005061	C-CER,CHIP	cetus-7	1-B	100nF,+80-20%,16V,Y5V,-,1005
C844	2203-000254	C-CER,CHIP	cetus-7	1-B	10nF,10%,16V,X7R,TP,1005,-
C845	2203-005061	C-CER,CHIP	cetus-9	4-B	100nF,+80-20%,16V,Y5V,-,1005
C846	2203-005061	C-CER,CHIP	cetus-19	1-C	100nF,+80-20%,16V,Y5V,-,1005
C847	2203-005061	C-CER,CHIP	cetus-38	4-C	100nF,+80-20%,16V,Y5V,-,1005
C848	2203-005571	C-CER,CHIP	cetus-10	3-B	10000nF,+80-20%,6.3V,Y5V,-,2012
C849	2402-001167	C-POLYMER AL CHIP	cetus-10	4-B	82UF,20%,2.5V,WT,TP,7.3x4.3x1.8MM
C85	2203-000206	C-CER,CHIP	cetus-31	1-C	100nF,10%,50V,X7R,TP,2012
C850	2203-005664	C-CER,CHIP	cetus-36	3-A	4700nF,10%,6.3V,X5R,TP,2012
C851	2203-000940	C-CER,CHIP	cetus-36	3-A	0.47NF,10%,50V,X7R,TP,1005
C852	2203-005664	C-CER,CHIP	cetus-36	4-A	4700nF,10%,6.3V,X5R,TP,2012
C853	2203-005061	C-CER,CHIP	cetus-11	2-D	100nF,+80-20%,16V,Y5V,-,1005
C854	2203-005061	C-CER,CHIP	cetus-12	2-B	100nF,+80-20%,16V,Y5V,-,1005
C855	2203-005198	C-CER,CHIP	cetus-17	3-D	1uF,10%,10V,X5R,TP,2012,-
C856	2203-005061	C-CER,CHIP	cetus-17	2-D	100nF,+80-20%,16V,Y5V,-,1005
C857	2203-000425	C-CER,CHIP	cetus-17	1-B	0.018NF,5%,50V,C0G,TP,1005
C858	2203-000425	C-CER,CHIP	cetus-17	1-B	0.018NF,5%,50V,C0G,TP,1005
C859	2203-005061	C-CER,CHIP	cetus-38	4-C	100nF,+80-20%,16V,Y5V,-,1005
C86	2203-000206	C-CER,CHIP	cetus-31	3-B	100nF,10%,50V,X7R,TP,2012
C860	2203-000254	C-CER,CHIP	cetus-11	1-D	10nF,10%,16V,X7R,TP,1005,-
C861	2203-005061	C-CER,CHIP	cetus-12	2-B	100nF,+80-20%,16V,Y5V,-,1005
C862	2203-005061	C-CER,CHIP	cetus-14	2-B	100nF,+80-20%,16V,Y5V,-,1005
C863	2203-000254	C-CER,CHIP	cetus-14	1-A	10nF,10%,16V,X7R,TP,1005,-
C864	2203-000254	C-CER,CHIP	cetus-14	2-B	10nF,10%,16V,X7R,TP,1005,-
C865	2203-005061	C-CER,CHIP	cetus-14	2-B	100nF,+80-20%,16V,Y5V,-,1005
C867	2203-000254	C-CER,CHIP	cetus-4	3-D	10nF,10%,16V,X7R,TP,1005,-
C868	2203-005061	C-CER,CHIP	cetus-4	2-D	100nF,+80-20%,16V,Y5V,-,1005
C869	2203-005061	C-CER,CHIP	cetus-4	2-D	100nF,+80-20%,16V,Y5V,-,1005
C87	2402-001169	C-POLYMER AL CHIP	cetus-32	3-C	220UF,20%,4V,WT,TP,7.3x4.3x1.8MM
C870	2203-000254	C-CER,CHIP	cetus-4	2-C	10nF,10%,16V,X7R,TP,1005,-
C871	2203-005061	C-CER,CHIP	cetus-30	1-A	100nF,+80-20%,16V,Y5V,-,1005

Ref.	RART NO.	DESCRIPTION	SHEET	Loc.	SPECIFICATIONS
C872	2203-005061	C-CER,CHIP	cetus-26	2-B	100nF,+80-20%,16V,Y5V,-,1005
C873	2203-005061	C-CER,CHIP	cetus-17	4-B	100nF,+80-20%,16V,Y5V,-,1005
C874	2203-005061	C-CER,CHIP	cetus-17	4-A	100nF,+80-20%,16V,Y5V,-,1005
C875	2203-005061	C-CER,CHIP	cetus-38	4-B	100nF,+80-20%,16V,Y5V,-,1005
C876	2203-005061	C-CER,CHIP	cetus-17	4-B	100nF,+80-20%,16V,Y5V,-,1005
C877	2203-005061	C-CER,CHIP	cetus-38	4-B	100nF,+80-20%,16V,Y5V,-,1005
C878	2203-006143	C-CER,CHIP	cetus-17	4-B	22000NF,20%,6.3V,X5R,TP,3216
C879	2402-001167	C-POLYMER AL CHIP	cetus-17	4-C	82UF,20%,2.5V,WT,TP,7.3x4.3x1.8MM
C880	2203-005061	C-CER,CHIP	cetus-17	4-B	100nF,+80-20%,16V,Y5V,-,1005
C881	2203-005061	C-CER,CHIP	cetus-17	2-D	100nF,+80-20%,16V,Y5V,-,1005
C882	2203-000278	C-CER,CHIP	cetus-16	4-C	0.01NF,0.5PF,50V,COG,TP,1005
C883	2203-005061	C-CER,CHIP	cetus-15	1-B	100nF,+80-20%,16V,Y5V,-,1005
C884	2203-000254	C-CER,CHIP	cetus-15	1-B	10nF,10%,16V,X7R,TP,1005,-
C885	2203-005198	C-CER,CHIP	cetus-17	2-D	1uF,10%,10V,X5R,TP,2012,-
C886	2203-000254	C-CER,CHIP	cetus-4	2-D	10nF,10%,16V,X7R,TP,1005,-
C887	2203-000254	C-CER,CHIP	cetus-4	2-D	10nF,10%,16V,X7R,TP,1005,-
C888	2203-005061	C-CER,CHIP	cetus-4	2-D	100nF,+80-20%,16V,Y5V,-,1005
C889	2203-005061	C-CER,CHIP	cetus-4	2-D	100nF,+80-20%,16V,Y5V,-,1005
C890	2203-000254	C-CER,CHIP	cetus-4	2-D	10nF,10%,16V,X7R,TP,1005,-
C891	2203-005061	C-CER,CHIP	cetus-4	2-D	100nF,+80-20%,16V,Y5V,-,1005
C892	2203-005061	C-CER,CHIP	cetus-4	2-D	100nF,+80-20%,16V,Y5V,-,1005
C893	2203-000254	C-CER,CHIP	cetus-4	2-D	10nF,10%,16V,X7R,TP,1005,-
C894	2203-000254	C-CER,CHIP	cetus-4	3-D	10nF,10%,16V,X7R,TP,1005,-
C895	2203-005198	C-CER,CHIP	cetus-21	4-A	1uF,10%,10V,X5R,TP,2012,-
C896	2203-000298	C-CER,CHIP	cetus-21	3-A	10000NF,+80-20%,16V,Y5V,TP,3225
C897	2203-005061	C-CER,CHIP	cetus-38	4-C	100nF,+80-20%,16V,Y5V,-,1005
C898	2203-000254	C-CER,CHIP	cetus-26	2-B	10nF,10%,16V,X7R,TP,1005,-
C899	2203-005061	C-CER,CHIP	cetus-20	2-A	100nF,+80-20%,16V,Y5V,-,1005
C9	2203-000254	C-CER,CHIP	cetus-31	2-B	10nF,10%,16V,X7R,TP,1005,-
C90	2203-000254	C-CER,CHIP	cetus-11	2-D	10nF,10%,16V,X7R,TP,1005,-
C900	2203-005061	C-CER,CHIP	cetus-21	3-A	100nF,+80-20%,16V,Y5V,-,1005
C901	2203-005061	C-CER,CHIP	cetus-17	4-B	100nF,+80-20%,16V,Y5V,-,1005
C902	2203-005061	C-CER,CHIP	cetus-38	4-C	100nF,+80-20%,16V,Y5V,-,1005
C903	2203-005061	C-CER,CHIP	cetus-17	4-B	100nF,+80-20%,16V,Y5V,-,1005
C904	2203-005061	C-CER,CHIP	cetus-38	4-C	100nF,+80-20%,16V,Y5V,-,1005
C905	2203-000278	C-CER,CHIP	cetus-15	4-A	0.01NF,0.5PF,50V,COG,TP,1005
C906	2203-005061	C-CER,CHIP	cetus-17	4-C	100nF,+80-20%,16V,Y5V,-,1005
C907	2203-005061	C-CER,CHIP	cetus-17	4-C	100nF,+80-20%,16V,Y5V,-,1005
C908	2203-005061	C-CER,CHIP	cetus-17	4-B	100nF,+80-20%,16V,Y5V,-,1005

Ref.	RART NO.	DESCRIPTION	SHEET	Loc.	SPECIFICATIONS
C909	2203-006143	C-CER,CHIP	cetus-17	4-B	22000NF,20%,6.3V,X5R,TP,3216
C91	2203-005061	C-CER,CHIP	cetus-14	1-B	100nF,+80-20%,16V,Y5V,-,1005
C910	2203-005061	C-CER,CHIP	cetus-17	4-B	100nF,+80-20%,16V,Y5V,-,1005
C911	2203-005061	C-CER,CHIP	cetus-17	4-C	100nF,+80-20%,16V,Y5V,-,1005
C912	2203-005061	C-CER,CHIP	cetus-17	4-A	100nF,+80-20%,16V,Y5V,-,1005
C913	2203-005061	C-CER,CHIP	cetus-17	4-C	100nF,+80-20%,16V,Y5V,-,1005
C914	2203-005061	C-CER,CHIP	cetus-17	4-C	100nF,+80-20%,16V,Y5V,-,1005
C915	2203-005061	C-CER,CHIP	cetus-15	1-A	100nF,+80-20%,16V,Y5V,-,1005
C916	2203-000278	C-CER,CHIP	cetus-16	4-C	0.01NF,0.5PF,50V,C0G,TP,1005
C917	2203-000254	C-CER,CHIP	cetus-15	1-A	10nF,10%,16V,X7R,TP,1005,-
C918	2203-005571	C-CER,CHIP	cetus-17	4-C	10000nF,+80-20%,6.3V,Y5V,-,2012
C919	2203-005061	C-CER,CHIP	cetus-30	1-A	100nF,+80-20%,16V,Y5V,-,1005
C92	2203-000254	C-CER,CHIP	cetus-11	1-D	10nF,10%,16V,X7R,TP,1005,-
C920	2203-005061	C-CER,CHIP	cetus-38	4-D	100nF,+80-20%,16V,Y5V,-,1005
C921	2203-005061	C-CER,CHIP	cetus-38	4-D	100nF,+80-20%,16V,Y5V,-,1005
C922	2203-005198	C-CER,CHIP	cetus-17	3-D	1uF,10%,10V,X5R,TP,2012,-
C923	2203-005061	C-CER,CHIP	cetus-17	3-D	100nF,+80-20%,16V,Y5V,-,1005
C924	2203-005061	C-CER,CHIP	cetus-17	2-C	100nF,+80-20%,16V,Y5V,-,1005
C925	2203-005061	C-CER,CHIP	cetus-17	2-C	100nF,+80-20%,16V,Y5V,-,1005
C926	2203-005061	C-CER,CHIP	cetus-38	4-B	100nF,+80-20%,16V,Y5V,-,1005
C927	2203-005061	C-CER,CHIP	cetus-29	4-B	100nF,+80-20%,16V,Y5V,-,1005
C928	2203-005061	C-CER,CHIP	cetus-17	4-B	100nF,+80-20%,16V,Y5V,-,1005
C929	2203-005061	C-CER,CHIP	cetus-38	4-B	100nF,+80-20%,16V,Y5V,-,1005
C93	2203-000254	C-CER,CHIP	cetus-11	1-B	10nF,10%,16V,X7R,TP,1005,-
C930	2203-005061	C-CER,CHIP	cetus-17	4-B	100nF,+80-20%,16V,Y5V,-,1005
C931	2203-005061	C-CER,CHIP	cetus-17	4-A	100nF,+80-20%,16V,Y5V,-,1005
C932	2203-005571	C-CER,CHIP	cetus-17	4-A	10000nF,+80-20%,6.3V,Y5V,-,2012
C933	2203-005061	C-CER,CHIP	cetus-17	3-C	100nF,+80-20%,16V,Y5V,-,1005
C934	2203-002720	C-CER,CHIP	cetus-17	3-C	10nF,10%,25V,X7R,-,1005
C935	2203-005061	C-CER,CHIP	cetus-28	1-B	100nF,+80-20%,16V,Y5V,-,1005
C936	2203-005061	C-CER,CHIP	cetus-28	1-B	100nF,+80-20%,16V,Y5V,-,1005
C937	2203-000438	C-CER,CHIP	cetus-29	4-B	1nF,10%,50V,X7R,TP,1005,-
C938	2203-000476	C-CER,CHIP	cetus-27	1-B	1000nF,+80-20%,16V,Y5V,-,2012
C94	2203-000254	C-CER,CHIP	cetus-14	1-B	10nF,10%,16V,X7R,TP,1005,-
C940	2203-005437	C-CER,CHIP	cetus-28	1-B	10000nF,+80-20%,10V,Y5V,TP,3216
C941	2203-000233	C-CER,CHIP	cetus-36	1-C	0.1nF,5%,50V,C0G,-,1005
C942	2203-005061	C-CER,CHIP	cetus-39	4-B	100nF,+80-20%,16V,Y5V,-,1005
C943	2203-005061	C-CER,CHIP	cetus-39	4-C	100nF,+80-20%,16V,Y5V,-,1005
C944	2203-005061	C-CER,CHIP	cetus-18	3-B	100nF,+80-20%,16V,Y5V,-,1005

Ref.	RART NO.	DESCRIPTION	SHEET	Loc.	SPECIFICATIONS
C945	2203-005061	C-CER,CHIP	cetus-18	3-B	100nF,+80-20%,16V,Y5V,-,1005
C946	2203-005061	C-CER,CHIP	cetus-38	3-C	100nF,+80-20%,16V,Y5V,-,1005
C947	2203-005061	C-CER,CHIP	cetus-18	3-B	100nF,+80-20%,16V,Y5V,-,1005
C948	2203-005061	C-CER,CHIP	cetus-18	3-B	100nF,+80-20%,16V,Y5V,-,1005
C949	2203-005061	C-CER,CHIP	cetus-23	1-D	100nF,+80-20%,16V,Y5V,-,1005
C95	2203-005061	C-CER,CHIP	cetus-14	2-B	100nF,+80-20%,16V,Y5V,-,1005
C950	2203-000628	C-CER,CHIP	cetus-19	3-C	0.022NF,5%,50V,C0G,TP,1005
C951	2203-000628	C-CER,CHIP	cetus-19	3-C	0.022NF,5%,50V,C0G,TP,1005
C954	2203-005061	C-CER,CHIP	cetus-6	1-A	100nF,+80-20%,16V,Y5V,-,1005
C955	2203-005061	C-CER,CHIP	cetus-6	1-A	100nF,+80-20%,16V,Y5V,-,1005
C956	2203-005061	C-CER,CHIP	cetus-6	1-A	100nF,+80-20%,16V,Y5V,-,1005
C957	2203-005061	C-CER,CHIP	cetus-6	1-A	100nF,+80-20%,16V,Y5V,-,1005
C958	2203-005061	C-CER,CHIP	cetus-6	1-A	100nF,+80-20%,16V,Y5V,-,1005
C959	2203-005061	C-CER,CHIP	cetus-6	1-A	100nF,+80-20%,16V,Y5V,-,1005
C96	2203-005061	C-CER,CHIP	cetus-30	1-A	100nF,+80-20%,16V,Y5V,-,1005
C960	2203-005061	C-CER,CHIP	cetus-6	1-A	100nF,+80-20%,16V,Y5V,-,1005
C961	2203-005061	C-CER,CHIP	cetus-6	1-A	100nF,+80-20%,16V,Y5V,-,1005
C962	2203-005061	C-CER,CHIP	cetus-6	1-A	100nF,+80-20%,16V,Y5V,-,1005
C963	2203-005061	C-CER,CHIP	cetus-14	3-B	100nF,+80-20%,16V,Y5V,-,1005
C964	2203-005061	C-CER,CHIP	cetus-14	3-B	100nF,+80-20%,16V,Y5V,-,1005
C968	2203-005061	C-CER,CHIP	cetus-14	3-B	100nF,+80-20%,16V,Y5V,-,1005
C97	2203-005061	C-CER,CHIP	cetus-30	3-D	100nF,+80-20%,16V,Y5V,-,1005
C972	2203-005061	C-CER,CHIP	cetus-14	2-B	100nF,+80-20%,16V,Y5V,-,1005
C973	2203-005061	C-CER,CHIP	cetus-14	2-B	100nF,+80-20%,16V,Y5V,-,1005
C976	2203-005061	C-CER,CHIP	cetus-19	4-C	100nF,+80-20%,16V,Y5V,-,1005
C977	2203-005061	C-CER,CHIP	cetus-19	4-C	100nF,+80-20%,16V,Y5V,-,1005
C978	2203-000628	C-CER,CHIP	cetus-22	4-B	0.022NF,5%,50V,C0G,TP,1005
C979	2203-000628	C-CER,CHIP	cetus-23	2-C	0.022NF,5%,50V,C0G,TP,1005
C98	2203-005061	C-CER,CHIP	cetus-38	4-D	100nF,+80-20%,16V,Y5V,-,1005
C980	2203-006000	C-CER,CHIP	cetus-22	3-A	1NF,10%,3KV,X7R,TP,4520
C981	2203-006000	C-CER,CHIP	cetus-22	3-A	1NF,10%,3KV,X7R,TP,4520
C982	2203-000233	C-CER,CHIP	cetus-23	2-B	0.1nF,5%,50V,C0G,-,1005
C983	2203-005482	C-CER,CHIP	cetus-6	3-A	100nF,10%,10V,X5R,TP,1005,-
C984	2203-005482	C-CER,CHIP	cetus-6	3-A	100nF,10%,10V,X5R,TP,1005,-
C985	2203-005482	C-CER,CHIP	cetus-6	3-A	100nF,10%,10V,X5R,TP,1005,-
C986	2203-005482	C-CER,CHIP	cetus-6	3-A	100nF,10%,10V,X5R,TP,1005,-
C987	2203-005061	C-CER,CHIP	cetus-22	3-B	100nF,+80-20%,16V,Y5V,-,1005
C988	2203-005061	C-CER,CHIP	cetus-22	1-D	100nF,+80-20%,16V,Y5V,-,1005
C989	2203-005061	C-CER,CHIP	cetus-22	1-D	100nF,+80-20%,16V,Y5V,-,1005

Ref.	RART NO.	DESCRIPTION	SHEET	Loc.	SPECIFICATIONS
C99	2203-005061	C-CER,CHIP	cetus-29	3-D	100nF,+80-20%,16V,Y5V,-,1005
C990	2203-005061	C-CER,CHIP	cetus-22	1-D	100nF,+80-20%,16V,Y5V,-,1005
C991	2203-005061	C-CER,CHIP	cetus-22	1-C	100nF,+80-20%,16V,Y5V,-,1005
C992	2203-005061	C-CER,CHIP	cetus-22	1-C	100nF,+80-20%,16V,Y5V,-,1005
C993	2203-005061	C-CER,CHIP	cetus-22	1-C	100nF,+80-20%,16V,Y5V,-,1005
C994	2203-005061	C-CER,CHIP	cetus-22	1-D	100nF,+80-20%,16V,Y5V,-,1005
C995	2203-005061	C-CER,CHIP	cetus-22	1-D	100nF,+80-20%,16V,Y5V,-,1005
C996	2203-005061	C-CER,CHIP	cetus-9	1-D	100nF,+80-20%,16V,Y5V,-,1005
C997	2203-000278	C-CER,CHIP	cetus-40	1-D	0.01NF,0.5PF,50V,COG,TP,1005
C998	2203-000278	C-CER,CHIP	cetus-40	1-C	0.01NF,0.5PF,50V,COG,TP,1005
C999	2203-000425	C-CER,CHIP	cetus-40	1-C	0.018NF,5%,50V,COG,TP,1005
D1	0401-000191	DIODE-SWITCHING	cetus-19	1-D	MMBD4148,75V,200MA,SOT-23,TP
D10	0404-000157	DIODE-SCHOTTKY	cetus-32	2-D	CMPSH-3A,30V,100MA,SOT-23,TP
D11	0404-000157	DIODE-SCHOTTKY	cetus-35	2-D	CMPSH-3A,30V,100MA,SOT-23,TP
D1100	0401-000191	DIODE-SWITCHING	cetus-39	3-B	MMBD4148,75V,200MA,SOT-23,TP
D1101	0401-000191	DIODE-SWITCHING	cetus-39	3-C	MMBD4148,75V,200MA,SOT-23,TP
D1106	0406-001141	DIODE-TVS	cetus-29	4-A	PGB0010603NR,-/-/1000V,-,EIA-RS481
D1108	0406-001141	DIODE-TVS	cetus-29	4-A	PGB0010603NR,-/-/1000V,-,EIA-RS481
D1109	0406-001141	DIODE-TVS	cetus-29	4-A	PGB0010603NR,-/-/1000V,-,EIA-RS481
D1110	0406-001141	DIODE-TVS	cetus-29	4-A	PGB0010603NR,-/-/1000V,-,EIA-RS481
D1112	0406-001141	DIODE-TVS	cetus-29	4-A	PGB0010603NR,-/-/1000V,-,EIA-RS481
D1113	0406-001141	DIODE-TVS	cetus-29	4-A	PGB0010603NR,-/-/1000V,-,EIA-RS481
D12	0401-000191	DIODE-SWITCHING	cetus-27	2-D	MMBD4148,75V,200MA,SOT-23,TP
D13	0404-000114	DIODE-SCHOTTKY	cetus-27	2-C	MMBD301LT1,30V,-,SOT-23,TP
D14	0402-001405	DIODE-RECTIFIER	cetus-20	1-C	B340A,40,3A,SMA,TP
D15	0401-000191	DIODE-SWITCHING	cetus-26	4-C	MMBD4148,75V,200MA,SOT-23,TP
D16	0404-000114	DIODE-SCHOTTKY	cetus-37	2-A	MMBD301LT1,30V,-,SOT-23,TP
D17	0401-000191	DIODE-SWITCHING	cetus-19	2-A	MMBD4148,75V,200MA,SOT-23,TP
D18	0402-001405	DIODE-RECTIFIER	cetus-36	2-D	B340A,40,3A,SMA,TP
D19	0401-000191	DIODE-SWITCHING	cetus-21	3-B	MMBD4148,75V,200MA,SOT-23,TP
D2	0402-001405	DIODE-RECTIFIER	cetus-31	3-D	B340A,40,3A,SMA,TP
D20	0401-000191	DIODE-SWITCHING	cetus-21	3-B	MMBD4148,75V,200MA,SOT-23,TP
D21	0404-000114	DIODE-SCHOTTKY	cetus-17	1-D	MMBD301LT1,30V,-,SOT-23,TP
D22	0404-000114	DIODE-SCHOTTKY	cetus-17	1-D	MMBD301LT1,30V,-,SOT-23,TP
D4	0402-001405	DIODE-RECTIFIER	cetus-33	3-D	B340A,40,3A,SMA,TP
D5	0401-000191	DIODE-SWITCHING	cetus-31	3-C	MMBD4148,75V,200MA,SOT-23,TP
D500	0406-001141	DIODE-TVS	cetus-19	2-D	PGB0010603NR,-/-/1000V,-,EIA-RS481
D501	0406-001141	DIODE-TVS	cetus-19	2-D	PGB0010603NR,-/-/1000V,-,EIA-RS481
D502	0406-001141	DIODE-TVS	cetus-19	1-D	PGB0010603NR,-/-/1000V,-,EIA-RS481

Ref.	RART NO.	DESCRIPTION	SHEET	Loc.	SPECIFICATIONS
D503	0401-000191	DIODE-SWITCHING	cetus-30	1-C	MMBD4148,75V,200MA,SOT-23,TP
D504	0402-001405	DIODE-RECTIFIER	cetus-31	2-C	B340A,40,3A,SMA,TP
D505	0402-001405	DIODE-RECTIFIER	cetus-33	3-D	B340A,40,3A,SMA,TP
D506	0402-001405	DIODE-RECTIFIER	cetus-33	2-C	B340A,40,3A,SMA,TP
D507	0402-001405	DIODE-RECTIFIER	cetus-33	3-C	B340A,40,3A,SMA,TP
D508	0402-001405	DIODE-RECTIFIER	cetus-34	2-B	B340A,40,3A,SMA,TP
D509	0402-001405	DIODE-RECTIFIER	cetus-34	2-C	B340A,40,3A,SMA,TP
D510	0406-001141	DIODE-TVS	cetus-28	3-A	PGB0010603NR,-/-/1000V,-,EIA-RS481
D511	0406-001141	DIODE-TVS	cetus-28	3-A	PGB0010603NR,-/-/1000V,-,EIA-RS481
D512	0402-001405	DIODE-RECTIFIER	cetus-37	1-B	B340A,40,3A,SMA,TP
D513	0402-001405	DIODE-RECTIFIER	cetus-37	1-B	B340A,40,3A,SMA,TP
D514	0401-000191	DIODE-SWITCHING	cetus-33	1-C	MMBD4148,75V,200MA,SOT-23,TP
D515	0401-000191	DIODE-SWITCHING	cetus-33	1-C	MMBD4148,75V,200MA,SOT-23,TP
D516	0402-001405	DIODE-RECTIFIER	cetus-36	2-B	B340A,40,3A,SMA,TP
D517	0402-001405	DIODE-RECTIFIER	cetus-36	2-B	B340A,40,3A,SMA,TP
D518	0402-001405	DIODE-RECTIFIER	cetus-31	1-C	B340A,40,3A,SMA,TP
D519	0404-001020	DIODE-SCHOTTKY	cetus-33	2-B	BAT54C,30V,200MA,SOT-23,TP
D520	0401-000191	DIODE-SWITCHING	cetus-19	1-C	MMBD4148,75V,200MA,SOT-23,TP
D521	0404-000114	DIODE-SCHOTTKY	cetus-17	3-D	MMBD301LT1,30V,-,SOT-23,TP
D522	0404-000114	DIODE-SCHOTTKY	cetus-28	1-A	MMBD301LT1,30V,-,SOT-23,TP
D6	0404-000157	DIODE-SCHOTTKY	cetus-31	2-C	CMPSH-3A,30V,100MA,SOT-23,TP
D7	0404-000157	DIODE-SCHOTTKY	cetus-34	3-D	CMPSH-3A,30V,100MA,SOT-23,TP
D8	0406-001141	DIODE-TVS	cetus-28	3-C	PGB0010603NR,-/-/1000V,-,EIA-RS481
D9	0406-001141	DIODE-TVS	cetus-28	3-C	PGB0010603NR,-/-/1000V,-,EIA-RS481
EC1	2402-001170	C-POLYMER AL CHIP	cetus-28	3-B	150UF,20%,6V,WT,TP,7.3x4.3x1.8MM
EC2	2402-001125	C-POLYMER AL CHIP	cetus-36	1-B	15UF,20%,25V,-,TP,7.3X4.3X1.9MM
EC3	2402-001125	C-POLYMER AL CHIP	cetus-36	1-B	15UF,20%,25V,-,TP,7.3X4.3X1.9MM
EC500	2402-001170	C-POLYMER AL CHIP	cetus-28	3-D	150UF,20%,6V,WT,TP,7.3x4.3x1.8MM
EC502	2402-001170	C-POLYMER AL CHIP	cetus-36	1-C	150UF,20%,6V,WT,TP,7.3x4.3x1.8MM
EC503	2402-001121	C-POLYMER AL CHIP	cetus-24	2-B	220UF,-,2.5V,-,TP,7.3x4.3x1.9
EC504	2402-001121	C-POLYMER AL CHIP	cetus-24	2-B	220UF,-,2.5V,-,TP,7.3x4.3x1.9
EMI1	BA70-00564A	CONTACT PLATE-EMI	cetus-12	1-C	DRAKEII,ASTM C32000 COPPER,TO.13,W2.8,L4.5
EMI2	BA70-00564A	CONTACT PLATE-EMI	cetus-12	1-C	DRAKEII,ASTM C32000 COPPER,TO.13,W2.8,L4.5
EMI3	BA70-00564A	CONTACT PLATE-EMI	cetus-12	1-C	DRAKEII,ASTM C32000 COPPER,TO.13,W2.8,L4.5
J1	3722-001692	JACK-MODULAR	cetus-22	2-B	12P/10C 2,STANDARD,N,SMD-OFFSET,-,N,BLK,AU
J10	3722-001649	JACK-IEEE1394	cetus-20	1-D	6P/1C,AU,BLK,ANGLE,IEEE1394
J11	3722-001775	JACK-PHONE	cetus-23	1-B	6P,3.6P,AG,PINK,-
J12	3709-001206	CONNECTOR-CARD EDGE	cetus-30	3-A	124P,0.8MM,SMD-A,AUF
J13-#	3709-001196	CONNECTOR-CARD EDGE	cetus-12	3-A	200P,0.6MM,SMD-A,AUF

Ref.	RART NO.	DESCRIPTION	SHEET	Loc.	SPECIFICATIONS
J14	3722-001785	JACK-PHONE	cetus-24	1-B	6P,3.6PI,AG,LIME,-
J15	3710-001763	CONNECTOR-SOCKET	cetus-23	1-C	30P,2R,0.8MM,SMD-S,AU
J16	3711-004649	CONNECTOR-HEADER	cetus-30	1-D	BOX,4P,1R,1.25mm,SMD-A,AUF
J17	3709-001261	CONNECTOR-CARD EDGE	cetus-21	4-C	9/10P,1.5MM/2MM,PIN,COPPER
J18	3711-000541	CONNECTOR-HEADER	cetus-17	1-C	BOX,2P,1R,1.25MM,SMD-A,SN,NTR
J2	3711-003609	CONNECTOR-HEADER	cetus-22	3-A	BOX,2P,1R,1.25MM,SMD-A,SN,BEG
J3	3701-001260	CONNECTOR-DSUB	cetus-19	1-C	15P,3R,FEMALE,-,AU
J4	3722-001772	JACK-DC POWER	cetus-31	4-C	1P,-,SN,-,-
J5	3711-004687	CONNECTOR-HEADER	cetus-33	1-C	NOWALL,5P,1R,2.5mm,ANGLE,AU10U
J500	3711-004649	CONNECTOR-HEADER	cetus-27	1-D	BOX,4P,1R,1.25mm,SMD-A,AUF
J501	3711-004649	CONNECTOR-HEADER	cetus-19	4-C	BOX,4P,1R,1.25mm,SMD-A,AUF
J502	3710-001669	CONNECTOR-SOCKET	cetus-19	3-C	20P,2R,0.5mm,SMD-A,SN
J503	3711-004318	CONNECTOR-HEADER	cetus-26	3-C	BOX,2P,1R,1.25MM,SMD-A,AUF
J504	3711-004646	CONNECTOR-HEADER	cetus-21	1-B	NOWALL,68P,2R,1.27mm,SMD-A,AUF
J505	3709-001226	CONNECTOR-CARD EDGE	cetus-21	1-A	68P,0.635MM,ANGLE,AU
J507	3711-004318	CONNECTOR-HEADER	cetus-24	1-C	BOX,2P,1R,1.25MM,SMD-A,AUF
J508	3708-001276	CONNECTOR-FPC/FFC/PIC	cetus-29	4-A	12P,0.5MM,SMD-A,SN,ZIF,FLIP,BOTTOM
J509	3711-004318	CONNECTOR-HEADER	cetus-24	1-D	BOX,2P,1R,1.25MM,SMD-A,AUF
J510	3708-001630	CONNECTOR-FPC/FFC/PIC	cetus-27	3-B	15P,0.5MM,SMD-A,-,ZIF,FLIP,BOTTOM
J511	3710-001764	CONNECTOR-SOCKET	cetus-28	1-B	50P,2R,0.5MM,SMD-S,AU
J6	3722-001619	JACK-USB	cetus-28	3-A	4P/1C,AU,BLK,ANFLE-OFF,A TYPE
J7	3710-001639	CONNECTOR-SOCKET	cetus-37	3-B	100P+4P,2R,0.5mm,SMD-S,AUF
J8-#	0902-001688	IC-MICROPROCESSOR	cetus-6	2-B	RJ80535LC0091M,64Bit,MicroFCBGA,478P
J9	3722-001619	JACK-USB	cetus-28	3-C	4P/1C,AU,BLK,ANFLE-OFF,A TYPE
KBD500	3708-001532	CONNECTOR-FPC/FFC/PIC	cetus-29	4-C	24P,1MM,SMD-A,SN,ZIF,-,BOTTOM
L1	2703-002533	INDUCTOR-SMD	cetus-31	3-C	3.7uH,20%,10.0x10.0mm
L10	2703-002535	INDUCTOR-SMD	cetus-36	2-D	4.7uH,20%,5050
L2	2703-002534	INDUCTOR-SMD	cetus-33	3-C	10uH,20%,10.0x10.0mm
L3	2703-002042	INDUCTOR-SMD	cetus-34	2-B	1.0uH,20%,13.0x13.0mm
L4	2703-002042	INDUCTOR-SMD	cetus-34	2-D	1.0uH,20%,13.0x13.0mm
L5	2703-002539	INDUCTOR-SMD	cetus-35	4-C	6.8uH,20%,6965
L500	2703-002397	INDUCTOR-SMD	cetus-10	4-B	0.1uH,10%,2012
L501	2703-002498	INDUCTOR-SMD	cetus-10	4-B	0.68uH,10%,2012
L502	2703-002397	INDUCTOR-SMD	cetus-10	4-B	0.1uH,10%,2012
L503	2703-000158	INDUCTOR-SMD	cetus-10	4-B	1uH,10%,2012
L6	2703-002540	INDUCTOR-SMD	cetus-32	3-C	4.7UH,20%,10.0x10.0mm
L7	2703-002540	INDUCTOR-SMD	cetus-32	1-C	4.7UH,20%,10.0x10.0mm
L8	2703-002539	INDUCTOR-SMD	cetus-35	1-C	6.8uH,20%,6965
L9	2703-002533	INDUCTOR-SMD	cetus-31	1-C	3.7uH,20%,10.0x10.0mm

Ref.	RART NO.	DESCRIPTION	SHEET	Loc.	SPECIFICATIONS
LT4	2703-002042	INDUCTOR-SMD	cetus-36	2-B	1.0uH,20%,13.0x13.0mm
LT5	2603-000048	TRANS-MATCHING	cetus-22	3-B	-,1:1,1:1,-,16P,11.81x8.63x2.15mm,ST
Q1	0505-000110	FET-SILICON	cetus-34	3-A	2N7002,N,60V,115mA,7.5ohm,0.3W,SOT-23
Q12	0505-000110	FET-SILICON	cetus-19	4-A	2N7002,N,60V,115mA,7.5ohm,0.3W,SOT-23
Q14	0505-000110	FET-SILICON	cetus-27	3-A	2N7002,N,60V,115mA,7.5ohm,0.3W,SOT-23
Q15	0505-000110	FET-SILICON	cetus-4	4-B	2N7002,N,60V,115mA,7.5ohm,0.3W,SOT-23
Q16	0501-000465	TR-SMALL SIGNAL	cetus-25	1-C	MMBT3904,NPN,350mW,SOT-23,TP,30-300
Q17	0505-001507	FET-SILICON	cetus-26	2-B	SI4465DY,P,-8V,+14A,0.009ohm,2.5W,SO-8
Q18	0505-000110	FET-SILICON	cetus-26	3-B	2N7002,N,60V,115mA,7.5ohm,0.3W,SOT-23
Q19	0501-000465	TR-SMALL SIGNAL	cetus-25	1-C	MMBT3904,NPN,350mW,SOT-23,TP,30-300
Q2	0505-001760	FET-SILICON	cetus-27	2-D	SI3456DV,N,+30V,+5.1A,0.045,2W,TSOP
Q20	0501-000465	TR-SMALL SIGNAL	cetus-25	1-B	MMBT3904,NPN,350mW,SOT-23,TP,30-300
Q21	0505-001165	FET-SILICON	cetus-36	2-D	SI3443DV,P,-20V,+3.5mA,65mohm
Q22	0501-000463	TR-SMALL SIGNAL	cetus-27	2-B	KST2907A,PNP,350mW,SOT-23,TP,1
Q23	0501-000458	TR-SMALL SIGNAL	cetus-27	2-A	KST2222ATF,NPN,350mW,SOT-23,TP
Q24	0505-000110	FET-SILICON	cetus-36	3-D	2N7002,N,60V,115mA,7.5ohm,0.3W,SOT-23
Q25	0501-000465	TR-SMALL SIGNAL	cetus-18	4-C	MMBT3904,NPN,350mW,SOT-23,TP,30-300
Q26	0501-000466	TR-SMALL SIGNAL	cetus-27	1-A	KST3904,NPN,350mW,SOT-23,TP,10
Q27	0501-000466	TR-SMALL SIGNAL	cetus-27	1-B	KST3904,NPN,350mW,SOT-23,TP,10
Q28	0501-000466	TR-SMALL SIGNAL	cetus-27	1-A	KST3904,NPN,350mW,SOT-23,TP,10
Q29	0501-000465	TR-SMALL SIGNAL	cetus-18	4-C	MMBT3904,NPN,350mW,SOT-23,TP,30-300
Q3	0505-000110	FET-SILICON	cetus-31	1-B	2N7002,N,60V,115mA,7.5ohm,0.3W,SOT-23
Q4	0505-000110	FET-SILICON	cetus-31	1-B	2N7002,N,60V,115mA,7.5ohm,0.3W,SOT-23
Q5	0505-000110	FET-SILICON	cetus-31	2-B	2N7002,N,60V,115mA,7.5ohm,0.3W,SOT-23
Q500	0505-000110	FET-SILICON	cetus-31	3-B	2N7002,N,60V,115mA,7.5ohm,0.3W,SOT-23
Q501	0505-001386	FET-SILICON	cetus-31	2-C	FDS6680A,N,30V,12.5A,0.0095ohm,2.5W,SO-8
Q502	0505-000275	FET-SILICON	cetus-33	2-C	SI4435DY,P,-30V,+8.0A,0.014ohm,2.5W,SO-8
Q503	0505-001056	FET-SILICON	cetus-33	3-C	IRF7205,P,-30V,-4.6A,0.070ohm,
Q504	0505-001650	FET-SILICON	cetus-34	2-B	IRF7809AV,N,30V,13.3A,9MOHM,2.5W,SO-8
Q505	0505-001650	FET-SILICON	cetus-34	2-C	IRF7809AV,N,30V,13.3A,9MOHM,2.5W,SO-8
Q506	0505-000110	FET-SILICON	cetus-31	3-C	2N7002,N,60V,115mA,7.5ohm,0.3W,SOT-23
Q507	0505-000110	FET-SILICON	cetus-33	2-C	2N7002,N,60V,115mA,7.5ohm,0.3W,SOT-23
Q508	0505-000110	FET-SILICON	cetus-37	4-B	2N7002,N,60V,115mA,7.5ohm,0.3W,SOT-23
Q509	0505-001562	FET-SILICON	cetus-35	3-C	SI4816DY,N,30V,5.3/7.7A,30/18.5mohm,1W,SO-8
Q510	0505-001648	FET-SILICON	cetus-34	2-C	IRF7811AV,N,30V,10.8A,11MOHM,2.5W,SO-8
Q511	0505-001648	FET-SILICON	cetus-34	2-D	IRF7811AV,N,30V,10.8A,11MOHM,2.5W,SO-8
Q512	0505-000110	FET-SILICON	cetus-34	3-A	2N7002,N,60V,115mA,7.5ohm,0.3W,SOT-23
Q513	0505-001386	FET-SILICON	cetus-31	1-C	FDS6680A,N,30V,12.5A,0.0095ohm,2.5W,SO-8
Q514	0505-001617	FET-SILICON	cetus-36	2-B	SI4470EY,N,60V,9A,11MOHM,1.85W,SO-8

Ref.	RART NO.	DESCRIPTION	SHEET	Loc.	SPECIFICATIONS
Q515-#	0505-001240	FET-SILICON	cetus-36	1-B	SI6933DQ,P,-30V,3.5A,0.045ohm,
Q516	0505-000110	FET-SILICON	cetus-22	4-A	2N7002,N,60V,115mA,7.5ohm,0.3W,SOT-23
Q517	0505-001562	FET-SILICON	cetus-35	2-C	SI4816DY,N,30V,5.3/7.7A,30/18.5mohm,1W,SO-8
Q518	0505-001386	FET-SILICON	cetus-31	1-C	FDS6680A,N,30V,12.5A,0.0095ohm,2.5W,SO-8
Q519	0505-000110	FET-SILICON	cetus-36	3-B	2N7002,N,60V,115mA,7.5ohm,0.3W,SOT-23
Q520	0505-000110	FET-SILICON	cetus-36	3-B	2N7002,N,60V,115mA,7.5ohm,0.3W,SOT-23
Q521	0505-001507	FET-SILICON	cetus-26	4-A	SI4465DY,P,-8V,+14A,0.009ohm,2.5W,SO-8
Q523	0505-000110	FET-SILICON	cetus-26	4-A	2N7002,N,60V,115mA,7.5ohm,0.3W,SOT-23
Q524	0505-000110	FET-SILICON	cetus-36	1-B	2N7002,N,60V,115mA,7.5ohm,0.3W,SOT-23
Q525	0505-000110	FET-SILICON	cetus-22	1-A	2N7002,N,60V,115mA,7.5ohm,0.3W,SOT-23
Q526	0505-000110	FET-SILICON	cetus-22	3-D	2N7002,N,60V,115mA,7.5ohm,0.3W,SOT-23
Q527	0505-001562	FET-SILICON	cetus-32	3-C	SI4816DY,N,30V,5.3/7.7A,30/18.5mohm,1W,SO-8
Q528	0505-001562	FET-SILICON	cetus-32	1-C	SI4816DY,N,30V,5.3/7.7A,30/18.5mohm,1W,SO-8
Q529	0505-001507	FET-SILICON	cetus-26	1-B	SI4465DY,P,-8V,+14A,0.009ohm,2.5W,SO-8
Q530	0505-000110	FET-SILICON	cetus-26	1-B	2N7002,N,60V,115mA,7.5ohm,0.3W,SOT-23
Q531	0505-001516	FET-SILICON	cetus-19	3-B	SI2315DS,P,-12V,+3.5A,0.118 ohm,1.25W,SOT-23
Q532	0505-000110	FET-SILICON	cetus-19	4-B	2N7002,N,60V,115mA,7.5ohm,0.3W,SOT-23
Q533	0505-000110	FET-SILICON	cetus-9	4-C	2N7002,N,60V,115mA,7.5ohm,0.3W,SOT-23
Q534	0501-000465	TR-SMALL SIGNAL	cetus-25	1-B	MMBT3904,NPN,350mW,SOT-23,TP,30-300
Q535	0505-000110	FET-SILICON	cetus-36	3-C	2N7002,N,60V,115mA,7.5ohm,0.3W,SOT-23
Q536	0505-000110	FET-SILICON	cetus-27	4-A	2N7002,N,60V,115mA,7.5ohm,0.3W,SOT-23
Q537	0505-000110	FET-SILICON	cetus-19	2-B	2N7002,N,60V,115mA,7.5ohm,0.3W,SOT-23
Q6	0505-001386	FET-SILICON	cetus-31	2-C	FDS6680A,N,30V,12.5A,0.0095ohm,2.5W,SO-8
Q7	0505-000110	FET-SILICON	cetus-31	2-B	2N7002,N,60V,115mA,7.5ohm,0.3W,SOT-23
R1	2007-000171	R-CHIP	cetus-34	3-A	0ohm,5%,1/16W,TP,1005
R10	2007-007107	R-CHIP	cetus-27	3-D	100Kohm,1%,1/16W,TP,1005
R101	2007-007942	R-CHIP	cetus-34	4-A	1Mohm,1%,1/16W,DA,TP,1005
R102	2007-007616	R-CHIP	cetus-34	3-B	4.64Kohm,1%,1/10W,TP,1608
R103	2007-000157	R-CHIP	cetus-27	1-D	47Kohm,5%,1/16W,TP,1005
R104	2007-007142	R-CHIP	cetus-27	1-D	10Kohm,1%,1/16W,TP,1005
R105	2007-000477	R-CHIP	cetus-20	1-C	1Mohm,5%,1/8W,TP,2012
R106	2007-000157	R-CHIP	cetus-23	3-A	47Kohm,5%,1/16W,TP,1005
R107	2007-007306	R-CHIP	cetus-23	3-A	100ohm,1%,1/16W,DA,TP,1005
R108	2007-007306	R-CHIP	cetus-23	3-A	100ohm,1%,1/16W,DA,TP,1005
R109	2007-000157	R-CHIP	cetus-23	3-A	47Kohm,5%,1/16W,TP,1005
R11	2007-000157	R-CHIP	cetus-27	3-D	47Kohm,5%,1/16W,TP,1005
R110	2007-007306	R-CHIP	cetus-23	3-A	100ohm,1%,1/16W,DA,TP,1005
R1100	2007-007142	R-CHIP	cetus-39	3-B	10Kohm,1%,1/16W,TP,1005
R1101	2007-007142	R-CHIP	cetus-39	3-C	10Kohm,1%,1/16W,TP,1005

Ref.	RART NO.	DESCRIPTION	SHEET	Loc.	SPECIFICATIONS
R1102	2007-007142	R-CHIP	cetus-16	1-B	10Kohm,1%,1/16W,TP,1005
R1103	2007-000171	R-CHIP	cetus-23	2-C	0ohm,5%,1/16W,TP,1005
R1105	2007-000141	R-CHIP	cetus-23	1-B	2.2Kohm,5%,1/16W,TP,1005
R1106	2007-007942	R-CHIP	cetus-34	4-B	1Mohm,1%,1/16W,DA,TP,1005
R1107	2007-008294	R-CHIP	cetus-19	4-C	330HM,1%,1/16W,DA,TP,1005
R1108	2007-008294	R-CHIP	cetus-19	4-C	330HM,1%,1/16W,DA,TP,1005
R1109	2007-000157	R-CHIP	cetus-27	4-B	47Kohm,5%,1/16W,TP,1005
R111	2007-000157	R-CHIP	cetus-23	3-A	47Kohm,5%,1/16W,TP,1005
R1110	2007-008294	R-CHIP	cetus-22	3-C	330HM,1%,1/16W,DA,TP,1005
R1111	2007-008294	R-CHIP	cetus-22	3-C	330HM,1%,1/16W,DA,TP,1005
R1112	2007-008294	R-CHIP	cetus-22	3-C	330HM,1%,1/16W,DA,TP,1005
R1113	2007-008294	R-CHIP	cetus-22	3-C	330HM,1%,1/16W,DA,TP,1005
R1114	2007-000173	R-CHIP	cetus-22	4-C	22ohm,5%,1/16W,DA,TP,1005
R1115	2007-008294	R-CHIP	cetus-22	4-C	330HM,1%,1/16W,DA,TP,1005
R1116	2007-008294	R-CHIP	cetus-22	4-C	330HM,1%,1/16W,DA,TP,1005
R1117	2007-008294	R-CHIP	cetus-22	4-C	330HM,1%,1/16W,DA,TP,1005
R1118	2007-007142	R-CHIP	cetus-19	2-B	10Kohm,1%,1/16W,TP,1005
R112	2007-008295	R-CHIP	cetus-32	4-C	43KOHM,1%,1/16W,DA,TP,1005
R1120	2007-000116	R-CHIP	cetus-23	3-B	120ohm,5%,1/10W,TP,1608
R1122	2007-008312	R-CHIP	cetus-20	3-D	390KOHM,1%,1/16W,DA,TP,1005
R1123	2007-007142	R-CHIP	cetus-22	4-B	10Kohm,1%,1/16W,TP,1005
R1124	2007-000148	R-CHIP	cetus-9	1-D	10Kohm,5%,1/16W,DA,TP,1005
R1125	2007-000148	R-CHIP	cetus-21	4-A	10Kohm,5%,1/16W,DA,TP,1005
R1126	2007-000141	R-CHIP	cetus-23	4-D	2.2Kohm,5%,1/16W,TP,1005
R1127	2007-007318	R-CHIP	cetus-32	2-D	1Kohm,1%,1/16W,DA,TP,1005
R114	2007-002970	R-CHIP	cetus-14	4-A	56ohm,5%,1/16W,TP,1005
R115	2007-002970	R-CHIP	cetus-13	1-A	56ohm,5%,1/16W,TP,1005
R116	2007-007142	R-CHIP	cetus-19	4-A	10Kohm,1%,1/16W,TP,1005
R117	2007-007107	R-CHIP	cetus-19	4-A	100Kohm,1%,1/16W,TP,1005
R118	2007-000143	R-CHIP	cetus-19	4-A	4.7Kohm,5%,1/16W,TP,1005
R119	2007-000171	R-CHIP	cetus-31	1-C	0ohm,5%,1/16W,TP,1005
R12	2007-000163	R-CHIP	cetus-27	2-C	120Kohm,5%,1/16W,DA,TP,1005
R120	2007-007877	R-CHIP	cetus-31	1-C	0.004ohm,1%,1W,TP,6432
R121	2007-002970	R-CHIP	cetus-14	4-A	56ohm,5%,1/16W,TP,1005
R122	2007-002970	R-CHIP	cetus-13	1-A	56ohm,5%,1/16W,TP,1005
R123	2007-007312	R-CHIP	cetus-29	2-D	20Kohm,1%,1/16W,TP,1005
R124	2007-002970	R-CHIP	cetus-14	1-C	56ohm,5%,1/16W,TP,1005
R125	2007-002970	R-CHIP	cetus-14	1-C	56ohm,5%,1/16W,TP,1005
R126	2007-002970	R-CHIP	cetus-14	1-C	56ohm,5%,1/16W,TP,1005

Ref.	RART NO.	DESCRIPTION	SHEET	Loc.	SPECIFICATIONS
R127	2007-002970	R-CHIP	cetus-14	4-A	56ohm,5%,1/16W,TP,1005
R128	2007-000172	R-CHIP	cetus-14	4-C	10ohm,5%,1/16W,TP,1005
R129	2007-000172	R-CHIP	cetus-14	4-C	10ohm,5%,1/16W,TP,1005
R13	2007-008269	R-CHIP	cetus-27	3-D	51KOHM,1%,1/16W,TP,1005
R130	2007-000172	R-CHIP	cetus-14	4-C	10ohm,5%,1/16W,TP,1005
R131	2007-002970	R-CHIP	cetus-13	1-A	56ohm,5%,1/16W,TP,1005
R132	2007-002970	R-CHIP	cetus-14	2-C	56ohm,5%,1/16W,TP,1005
R133	2007-002970	R-CHIP	cetus-14	2-B	56ohm,5%,1/16W,TP,1005
R134	2007-002970	R-CHIP	cetus-14	1-C	56ohm,5%,1/16W,TP,1005
R135	2007-002970	R-CHIP	cetus-14	4-A	56ohm,5%,1/16W,TP,1005
R136	2007-002970	R-CHIP	cetus-14	2-B	56ohm,5%,1/16W,TP,1005
R137	2007-002970	R-CHIP	cetus-13	1-A	56ohm,5%,1/16W,TP,1005
R138	2007-000172	R-CHIP	cetus-14	4-B	10ohm,5%,1/16W,TP,1005
R139	2007-000172	R-CHIP	cetus-14	4-C	10ohm,5%,1/16W,TP,1005
R14	2007-007142	R-CHIP	cetus-31	1-B	10Kohm,1%,1/16W,TP,1005
R140	2007-000172	R-CHIP	cetus-14	4-C	10ohm,5%,1/16W,TP,1005
R141	2007-000172	R-CHIP	cetus-14	4-C	10ohm,5%,1/16W,TP,1005
R142	2007-002970	R-CHIP	cetus-14	1-C	56ohm,5%,1/16W,TP,1005
R143	2007-002970	R-CHIP	cetus-14	1-C	56ohm,5%,1/16W,TP,1005
R144	2007-002970	R-CHIP	cetus-14	1-C	56ohm,5%,1/16W,TP,1005
R145	2007-000029	R-CHIP	cetus-23	4-A	0ohm,5%,1/8W,TP,2012
R146	2007-002970	R-CHIP	cetus-14	4-A	56ohm,5%,1/16W,TP,1005
R147	2007-002970	R-CHIP	cetus-14	2-B	56ohm,5%,1/16W,TP,1005
R148	2007-002970	R-CHIP	cetus-14	2-B	56ohm,5%,1/16W,TP,1005
R149	2007-002970	R-CHIP	cetus-14	2-B	56ohm,5%,1/16W,TP,1005
R15	2007-008304	R-CHIP	cetus-31	1-B	300KOHM,1%,1/16W,DA,TP,1005
R150	2007-002970	R-CHIP	cetus-14	2-B	56ohm,5%,1/16W,TP,1005
R151	2007-002970	R-CHIP	cetus-14	2-B	56ohm,5%,1/16W,TP,1005
R152	2007-002970	R-CHIP	cetus-13	1-A	56ohm,5%,1/16W,TP,1005
R153	2007-000172	R-CHIP	cetus-14	4-B	10ohm,5%,1/16W,TP,1005
R154	2007-000172	R-CHIP	cetus-14	4-B	10ohm,5%,1/16W,TP,1005
R155	2007-000172	R-CHIP	cetus-14	4-B	10ohm,5%,1/16W,TP,1005
R156	2007-000172	R-CHIP	cetus-14	4-B	10ohm,5%,1/16W,TP,1005
R157	2007-000172	R-CHIP	cetus-14	4-B	10ohm,5%,1/16W,TP,1005
R158	2007-002970	R-CHIP	cetus-14	1-C	56ohm,5%,1/16W,TP,1005
R159	2007-000029	R-CHIP	cetus-23	4-A	0ohm,5%,1/8W,TP,2012
R16	2007-008304	R-CHIP	cetus-31	1-B	300KOHM,1%,1/16W,DA,TP,1005
R160	2007-002970	R-CHIP	cetus-14	4-A	56ohm,5%,1/16W,TP,1005
R161	2007-002970	R-CHIP	cetus-14	2-B	56ohm,5%,1/16W,TP,1005

Ref.	RART NO.	DESCRIPTION	SHEET	Loc.	SPECIFICATIONS
R162	2007-002970	R-CHIP	cetus-14	4-A	56ohm,5%,1/16W,TP,1005
R163	2007-002970	R-CHIP	cetus-13	1-A	56ohm,5%,1/16W,TP,1005
R164	2007-000172	R-CHIP	cetus-14	4-B	10ohm,5%,1/16W,TP,1005
R165	2007-002970	R-CHIP	cetus-13	1-B	56ohm,5%,1/16W,TP,1005
R166	2007-000070	R-CHIP	cetus-23	3-C	0ohm,5%,1/10W,TP,1608
R167	2007-000070	R-CHIP	cetus-23	3-C	0ohm,5%,1/10W,TP,1608
R168	2007-000157	R-CHIP	cetus-23	2-B	47Kohm,5%,1/16W,TP,1005
R17	2007-007942	R-CHIP	cetus-31	2-B	1Mohm,1%,1/16W,DA,TP,1005
R171	2007-008294	R-CHIP	cetus-23	2-C	330HM,1%,1/16W,DA,TP,1005
R172	2007-008294	R-CHIP	cetus-23	1-D	330HM,1%,1/16W,DA,TP,1005
R173	2007-008294	R-CHIP	cetus-23	1-C	330HM,1%,1/16W,DA,TP,1005
R174	2007-007142	R-CHIP	cetus-30	3-C	10Kohm,1%,1/16W,TP,1005
R175	2007-002970	R-CHIP	cetus-14	4-A	56ohm,5%,1/16W,TP,1005
R176	2007-002970	R-CHIP	cetus-13	1-B	56ohm,5%,1/16W,TP,1005
R178	2007-000029	R-CHIP	cetus-23	4-A	0ohm,5%,1/8W,TP,2012
R179	2007-007142	R-CHIP	cetus-23	4-C	10Kohm,1%,1/16W,TP,1005
R18	2007-007142	R-CHIP	cetus-31	2-B	10Kohm,1%,1/16W,TP,1005
R180	2007-007142	R-CHIP	cetus-23	4-B	10Kohm,1%,1/16W,TP,1005
R181	2007-008294	R-CHIP	cetus-23	3-C	330HM,1%,1/16W,DA,TP,1005
R182	2007-008294	R-CHIP	cetus-23	3-C	330HM,1%,1/16W,DA,TP,1005
R183	2007-008294	R-CHIP	cetus-23	3-C	330HM,1%,1/16W,DA,TP,1005
R184	2007-008294	R-CHIP	cetus-23	3-C	330HM,1%,1/16W,DA,TP,1005
R185	2007-000157	R-CHIP	cetus-23	3-A	47Kohm,5%,1/16W,TP,1005
R186	2007-000157	R-CHIP	cetus-23	4-C	47Kohm,5%,1/16W,TP,1005
R187	2007-000143	R-CHIP	cetus-23	4-C	4.7Kohm,5%,1/16W,TP,1005
R188	2007-000157	R-CHIP	cetus-23	3-B	47Kohm,5%,1/16W,TP,1005
R189	2007-000157	R-CHIP	cetus-26	4-C	47Kohm,5%,1/16W,TP,1005
R19	2007-007766	R-CHIP	cetus-31	2-B	2Kohm,1%,1/16W,TP,1005
R190	2007-000157	R-CHIP	cetus-27	3-A	47Kohm,5%,1/16W,TP,1005
R191	2007-007142	R-CHIP	cetus-25	4-D	10Kohm,1%,1/16W,TP,1005
R192	2007-007142	R-CHIP	cetus-25	4-D	10Kohm,1%,1/16W,TP,1005
R193	2007-000171	R-CHIP	cetus-25	3-A	0ohm,5%,1/16W,TP,1005
R194	2007-007142	R-CHIP	cetus-25	4-D	10Kohm,1%,1/16W,TP,1005
R195	2007-007142	R-CHIP	cetus-25	4-D	10Kohm,1%,1/16W,TP,1005
R196	2007-007142	R-CHIP	cetus-25	4-D	10Kohm,1%,1/16W,TP,1005
R197	2007-007142	R-CHIP	cetus-25	2-A	10Kohm,1%,1/16W,TP,1005
R198	2007-007142	R-CHIP	cetus-25	4-D	10Kohm,1%,1/16W,TP,1005
R199	2007-007946	R-CHIP	cetus-25	2-B	470Kohm,1%,1/16W,TP,1005
R2	2007-007142	R-CHIP	cetus-16	1-B	10Kohm,1%,1/16W,TP,1005

Ref.	RART NO.	DESCRIPTION	SHEET	Loc.	SPECIFICATIONS
R20	2007-008136	R-CHIP	cetus-31	2-C	36Kohm,1%,1/16W,DA,TP,1005
R200	2007-007142	R-CHIP	cetus-4	4-B	10Kohm,1%,1/16W,TP,1005
R201	2007-007142	R-CHIP	cetus-4	4-C	10Kohm,1%,1/16W,TP,1005
R203	2007-000171	R-CHIP	cetus-23	4-C	0ohm,5%,1/16W,TP,1005
R204	2007-007134	R-CHIP	cetus-24	4-B	39Kohm,1%,1/16W,DA,TP,1005
R205	2007-000156	R-CHIP	cetus-24	4-A	30Kohm,5%,1/16W,TP,1005
R206	2007-000156	R-CHIP	cetus-24	4-B	30Kohm,5%,1/16W,TP,1005
R207	2007-007134	R-CHIP	cetus-24	4-C	39Kohm,1%,1/16W,DA,TP,1005
R208	2007-007142	R-CHIP	cetus-23	1-B	10Kohm,1%,1/16W,TP,1005
R209	2007-007142	R-CHIP	cetus-23	1-B	10Kohm,1%,1/16W,TP,1005
R21	2007-008304	R-CHIP	cetus-31	2-B	300KOHM,1%,1/16W,DA,TP,1005
R210	2007-007142	R-CHIP	cetus-23	1-C	10Kohm,1%,1/16W,TP,1005
R211	2007-000160	R-CHIP	cetus-24	2-D	68Kohm,5%,1/16W,DA,TP,1005
R212	2007-008269	R-CHIP	cetus-24	2-D	51KOHM,1%,1/16W,TP,1005
R213	2007-000029	R-CHIP	cetus-23	4-A	0ohm,5%,1/8W,TP,2012
R214	2007-000160	R-CHIP	cetus-24	2-D	68Kohm,5%,1/16W,DA,TP,1005
R215	2007-008269	R-CHIP	cetus-24	2-D	51KOHM,1%,1/16W,TP,1005
R216	2007-000141	R-CHIP	cetus-37	3-A	2.2Kohm,5%,1/16W,TP,1005
R217	2007-007107	R-CHIP	cetus-37	2-B	100Kohm,1%,1/16W,TP,1005
R218	2007-007107	R-CHIP	cetus-37	3-A	100Kohm,1%,1/16W,TP,1005
R219	2007-007107	R-CHIP	cetus-37	3-A	100Kohm,1%,1/16W,TP,1005
R22	2007-008304	R-CHIP	cetus-31	3-B	300KOHM,1%,1/16W,DA,TP,1005
R220	2007-000141	R-CHIP	cetus-37	3-A	2.2Kohm,5%,1/16W,TP,1005
R221	2007-001313	R-CHIP	cetus-25	1-D	330ohm,5%,1/16W,DA,TP,1005
R222	2007-007142	R-CHIP	cetus-25	4-D	10Kohm,1%,1/16W,TP,1005
R223	2007-007142	R-CHIP	cetus-25	4-D	10Kohm,1%,1/16W,TP,1005
R224	2007-007107	R-CHIP	cetus-25	3-D	100Kohm,1%,1/16W,TP,1005
R225	2007-007142	R-CHIP	cetus-25	4-D	10Kohm,1%,1/16W,TP,1005
R226	2007-007142	R-CHIP	cetus-25	2-A	10Kohm,1%,1/16W,TP,1005
R227	2007-000157	R-CHIP	cetus-19	1-A	47Kohm,5%,1/16W,TP,1005
R228	2007-007142	R-CHIP	cetus-4	4-C	10Kohm,1%,1/16W,TP,1005
R229	2007-008294	R-CHIP	cetus-4	2-C	33OHM,1%,1/16W,DA,TP,1005
R23	2007-007107	R-CHIP	cetus-33	1-B	100Kohm,1%,1/16W,TP,1005
R230	2007-008294	R-CHIP	cetus-4	2-C	33OHM,1%,1/16W,DA,TP,1005
R231	2007-008294	R-CHIP	cetus-4	2-C	33OHM,1%,1/16W,DA,TP,1005
R232	2007-008294	R-CHIP	cetus-4	2-B	33OHM,1%,1/16W,DA,TP,1005
R233	2007-008294	R-CHIP	cetus-4	2-C	33OHM,1%,1/16W,DA,TP,1005
R234	2007-008294	R-CHIP	cetus-4	2-B	33OHM,1%,1/16W,DA,TP,1005
R235	2007-008294	R-CHIP	cetus-4	2-B	33OHM,1%,1/16W,DA,TP,1005

Ref.	RART NO.	DESCRIPTION	SHEET	Loc.	SPECIFICATIONS
R236	2007-008294	R-CHIP	cetus-4	2-B	330HM,1%,1/16W,DA,TP,1005
R238	2007-008294	R-CHIP	cetus-4	2-C	330HM,1%,1/16W,DA,TP,1005
R24	2007-007334	R-CHIP	cetus-33	1-B	200Kohm,1%,1/16W,TP,1005
R240	2007-008294	R-CHIP	cetus-4	3-C	330HM,1%,1/16W,DA,TP,1005
R242	2007-008294	R-CHIP	cetus-4	3-C	330HM,1%,1/16W,DA,TP,1005
R243	2007-008294	R-CHIP	cetus-4	3-C	330HM,1%,1/16W,DA,TP,1005
R244	2007-008294	R-CHIP	cetus-4	2-B	330HM,1%,1/16W,DA,TP,1005
R245	2007-007142	R-CHIP	cetus-4	2-B	10Kohm,1%,1/16W,TP,1005
R247	2007-000231	R-CHIP	cetus-25	1-D	1.3Kohm,1%,1/10W,TP,1608
R248	2007-001313	R-CHIP	cetus-25	1-C	330ohm,5%,1/16W,DA,TP,1005
R249	2007-000172	R-CHIP	cetus-25	3-C	10ohm,5%,1/16W,TP,1005
R25	2007-007306	R-CHIP	cetus-33	1-C	100ohm,1%,1/16W,DA,TP,1005
R250	2007-007142	R-CHIP	cetus-20	3-C	10Kohm,1%,1/16W,TP,1005
R251	2007-008300	R-CHIP	cetus-20	2-C	5.11KOHM,1%,1/16W,DA,TP,1005
R252	2007-008026	R-CHIP	cetus-20	2-C	56ohm,1%,1/16W,DA,TP,1005
R253	2007-008026	R-CHIP	cetus-20	2-C	56ohm,1%,1/16W,DA,TP,1005
R254	2007-008026	R-CHIP	cetus-20	2-C	56ohm,1%,1/16W,DA,TP,1005
R255	2007-007312	R-CHIP	cetus-19	2-B	20Kohm,1%,1/16W,TP,1005
R256	2007-008026	R-CHIP	cetus-20	2-C	56ohm,1%,1/16W,DA,TP,1005
R257	2007-000171	R-CHIP	cetus-20	4-B	0ohm,5%,1/16W,TP,1005
R258	2007-008294	R-CHIP	cetus-21	2-C	330HM,1%,1/16W,DA,TP,1005
R259	2007-000172	R-CHIP	cetus-16	4-C	10ohm,5%,1/16W,TP,1005
R26	2007-007306	R-CHIP	cetus-33	1-C	100ohm,1%,1/16W,DA,TP,1005
R260	2007-008294	R-CHIP	cetus-4	2-C	330HM,1%,1/16W,DA,TP,1005
R261	2007-007142	R-CHIP	cetus-4	3-C	10Kohm,1%,1/16W,TP,1005
R262	2007-008329	R-CHIP	cetus-4	2-B	1500HM,1%,1/16W,TP,1005
R263	2007-008329	R-CHIP	cetus-4	2-B	1500HM,1%,1/16W,TP,1005
R264	2007-008294	R-CHIP	cetus-4	3-C	330HM,1%,1/16W,DA,TP,1005
R265	2007-000171	R-CHIP	cetus-21	3-B	0ohm,5%,1/16W,TP,1005
R266	2007-008300	R-CHIP	cetus-20	2-D	5.11KOHM,1%,1/16W,DA,TP,1005
R267	2007-000157	R-CHIP	cetus-21	3-B	47Kohm,5%,1/16W,TP,1005
R268	2007-000171	R-CHIP	cetus-21	3-C	0ohm,5%,1/16W,TP,1005
R269	2007-008026	R-CHIP	cetus-20	1-D	56ohm,1%,1/16W,DA,TP,1005
R27	2007-007306	R-CHIP	cetus-33	1-C	100ohm,1%,1/16W,DA,TP,1005
R270	2007-008026	R-CHIP	cetus-20	2-D	56ohm,1%,1/16W,DA,TP,1005
R271	2007-008026	R-CHIP	cetus-20	2-D	56ohm,1%,1/16W,DA,TP,1005
R272	2007-008026	R-CHIP	cetus-20	2-D	56ohm,1%,1/16W,DA,TP,1005
R273	2007-001313	R-CHIP	cetus-25	1-B	330ohm,5%,1/16W,DA,TP,1005
R274	2007-000171	R-CHIP	cetus-25	1-C	0ohm,5%,1/16W,TP,1005

Ref.	RART NO.	DESCRIPTION	SHEET	Loc.	SPECIFICATIONS
R275	2007-001313	R-CHIP	cetus-25	1-C	330ohm,5%,1/16W,DA,TP,1005
R276	2007-000157	R-CHIP	cetus-21	3-B	47Kohm,5%,1/16W,TP,1005
R277	2007-008294	R-CHIP	cetus-21	3-D	330HM,1%,1/16W,DA,TP,1005
R278	2007-007142	R-CHIP	cetus-15	1-D	10Kohm,1%,1/16W,TP,1005
R279	2007-007142	R-CHIP	cetus-15	1-D	10Kohm,1%,1/16W,TP,1005
R28	2007-007318	R-CHIP	cetus-31	3-C	1Kohm,1%,1/16W,DA,TP,1005
R280	2007-007142	R-CHIP	cetus-15	1-D	10Kohm,1%,1/16W,TP,1005
R281	2007-007306	R-CHIP	cetus-20	4-B	100ohm,1%,1/16W,DA,TP,1005
R282	2007-000172	R-CHIP	cetus-20	4-B	10ohm,5%,1/16W,TP,1005
R283	2007-007107	R-CHIP	cetus-20	4-A	100Kohm,1%,1/16W,TP,1005
R285	2007-007142	R-CHIP	cetus-20	3-C	10Kohm,1%,1/16W,TP,1005
R286	2007-000735	R-CHIP	cetus-27	2-B	30Kohm,1%,1/8W,TP,2012
R287	2007-000868	R-CHIP	cetus-27	2-B	4.7Kohm,1%,1/8W,TP,2012
R289	2007-007318	R-CHIP	cetus-17	3-D	1Kohm,1%,1/16W,DA,TP,1005
R29	2007-007142	R-CHIP	cetus-31	2-B	10Kohm,1%,1/16W,TP,1005
R290	2007-007107	R-CHIP	cetus-36	3-D	100Kohm,1%,1/16W,TP,1005
R291	2007-000157	R-CHIP	cetus-21	3-B	47Kohm,5%,1/16W,TP,1005
R292	2007-007142	R-CHIP	cetus-20	2-C	10Kohm,1%,1/16W,TP,1005
R293	2007-001313	R-CHIP	cetus-18	4-C	330ohm,5%,1/16W,DA,TP,1005
R294	2007-007142	R-CHIP	cetus-20	2-C	10Kohm,1%,1/16W,TP,1005
R295	2007-007142	R-CHIP	cetus-15	1-C	10Kohm,1%,1/16W,TP,1005
R296	2007-007312	R-CHIP	cetus-20	2-C	20Kohm,1%,1/16W,TP,1005
R297	2007-007142	R-CHIP	cetus-27	2-B	10Kohm,1%,1/16W,TP,1005
R298	2007-000297	R-CHIP	cetus-27	1-B	10Kohm,1%,1/8W,TP,2012
R299	2007-000998	R-CHIP	cetus-27	2-B	510ohm,1%,1/8W,TP,2012
R3	2007-000060	R-CHIP	cetus-34	3-A	100Kohm,1%,1/10W,TP,1608
R30	2007-000172	R-CHIP	cetus-31	2-D	10ohm,5%,1/16W,TP,1005
R300	2007-000998	R-CHIP	cetus-27	1-B	510ohm,1%,1/8W,TP,2012
R301	2007-007142	R-CHIP	cetus-27	2-A	10Kohm,1%,1/16W,TP,1005
R302	2007-007142	R-CHIP	cetus-27	2-A	10Kohm,1%,1/16W,TP,1005
R303	2007-000277	R-CHIP	cetus-27	2-A	100Kohm,1%,1/8W,TP,2012
R305	2007-007318	R-CHIP	cetus-17	1-C	1Kohm,1%,1/16W,DA,TP,1005
R306	2007-007942	R-CHIP	cetus-27	1-C	1Mohm,1%,1/16W,DA,TP,1005
R307	2007-000152	R-CHIP	cetus-19	2-A	20Kohm,5%,1/16W,DA,TP,1005
R308	2007-000231	R-CHIP	cetus-18	4-C	1.3Kohm,1%,1/10W,TP,1608
R31	2007-008717	R-CHIP	cetus-31	3-C	0.007ohm,1%,1W,TP,6432
R35	2007-007766	R-CHIP	cetus-33	2-B	2Kohm,1%,1/16W,TP,1005
R36	2007-007312	R-CHIP	cetus-33	4-B	20Kohm,1%,1/16W,TP,1005
R37	2007-008304	R-CHIP	cetus-33	2-B	300KOHM,1%,1/16W,DA,TP,1005

Ref.	RART NO.	DESCRIPTION	SHEET	Loc.	SPECIFICATIONS
R38	2007-000736	R-CHIP	cetus-33	4-B	30Kohm,1%,1/10W,TP,1608
R39	2007-000736	R-CHIP	cetus-33	4-B	30Kohm,1%,1/10W,TP,1608
R4	2007-001161	R-CHIP	cetus-27	2-D	75Kohm,5%,1/10W,TP,1608
R40	2007-007311	R-CHIP	cetus-33	4-B	22Kohm,1%,1/16W,TP,1005
R41	2007-000171	R-CHIP	cetus-35	2-C	0ohm,5%,1/16W,TP,1005
R42	2007-007585	R-CHIP	cetus-35	3-C	430Kohm,1%,1/16W,DA,TP,1005
R43	2007-007585	R-CHIP	cetus-35	2-B	430Kohm,1%,1/16W,DA,TP,1005
R46	2007-007318	R-CHIP	cetus-35	3-B	1Kohm,1%,1/16W,DA,TP,1005
R47	2007-007568	R-CHIP	cetus-33	4-C	0.0330HM,1%,1W,TP,6432
R48	2007-008300	R-CHIP	cetus-35	3-C	5.11KOHM,1%,1/16W,DA,TP,1005
R49	2007-007142	R-CHIP	cetus-5	4-B	10Kohm,1%,1/16W,TP,1005
R5	2007-000163	R-CHIP	cetus-27	2-D	120Kohm,5%,1/16W,DA,TP,1005
R50	2007-007142	R-CHIP	cetus-5	4-B	10Kohm,1%,1/16W,TP,1005
R500	2007-001166	R-CHIP	cetus-22	3-A	75ohm,5%,1/8W,TP,2012
R501	2007-001166	R-CHIP	cetus-22	2-A	75ohm,5%,1/8W,TP,2012
R502	2007-001166	R-CHIP	cetus-22	3-A	75ohm,5%,1/8W,TP,2012
R503	2007-001166	R-CHIP	cetus-22	3-A	75ohm,5%,1/8W,TP,2012
R504	2007-000157	R-CHIP	cetus-30	1-C	47Kohm,5%,1/16W,TP,1005
R505	2007-000070	R-CHIP	cetus-6	4-D	0ohm,5%,1/10W,TP,1608
R506	2007-000066	R-CHIP	cetus-31	4-C	20Kohm,1%,1/10W,TP,1608
R507	2007-002899	R-CHIP	cetus-31	1-C	10ohm,1%,1/10W,TP,1608
R508	2007-007142	R-CHIP	cetus-31	1-B	10Kohm,1%,1/16W,TP,1005
R509	2007-007592	R-CHIP	cetus-31	1-C	270Kohm,1%,1/16W,DA,TP,1005
R51	2007-000171	R-CHIP	cetus-5	3-A	0ohm,5%,1/16W,TP,1005
R510	2007-002899	R-CHIP	cetus-31	1-C	10ohm,1%,1/10W,TP,1608
R511	2007-008269	R-CHIP	cetus-31	1-C	51KOHM,1%,1/16W,TP,1005
R512	2007-007142	R-CHIP	cetus-31	2-B	10Kohm,1%,1/16W,TP,1005
R513	2007-007489	R-CHIP	cetus-31	2-B	150Kohm,1%,1/16W,DA,TP,1005
R514	2007-007946	R-CHIP	cetus-31	3-C	470Kohm,1%,1/16W,TP,1005
R515	2007-007942	R-CHIP	cetus-31	2-B	1Mohm,1%,1/16W,DA,TP,1005
R516	2007-002899	R-CHIP	cetus-31	2-C	10ohm,1%,1/10W,TP,1608
R517	2007-002899	R-CHIP	cetus-31	3-C	10ohm,1%,1/10W,TP,1608
R518	2007-007142	R-CHIP	cetus-33	2-C	10Kohm,1%,1/16W,TP,1005
R519	2007-007107	R-CHIP	cetus-33	2-C	100Kohm,1%,1/16W,TP,1005
R52	2007-000171	R-CHIP	cetus-5	3-A	0ohm,5%,1/16W,TP,1005
R520	2007-007568	R-CHIP	cetus-33	2-C	0.0330HM,1%,1W,TP,6432
R521	2007-002970	R-CHIP	cetus-5	3-C	56ohm,5%,1/16W,TP,1005
R523	2007-001313	R-CHIP	cetus-6	4-D	330ohm,5%,1/16W,DA,TP,1005
R524	2007-001313	R-CHIP	cetus-6	3-C	330ohm,5%,1/16W,DA,TP,1005

Ref.	RART NO.	DESCRIPTION	SHEET	Loc.	SPECIFICATIONS
R525	2007-000171	R-CHIP	cetus-6	3-C	0ohm,5%,1/16W,TP,1005
R526	2007-008314	R-CHIP	cetus-6	2-C	54.90HM,1%,1/16W,DA,TP,1005
R527	2007-008303	R-CHIP	cetus-6	2-C	27.40HM,1%,1/16W,DA,TP,1005
R528	2007-007107	R-CHIP	cetus-31	3-C	100Kohm,1%,1/16W,TP,1005
R529	2007-008304	R-CHIP	cetus-31	3-C	300KOHM,1%,1/16W,DA,TP,1005
R53	2007-007142	R-CHIP	cetus-34	3-D	10Kohm,1%,1/16W,TP,1005
R530	2007-000171	R-CHIP	cetus-31	4-B	0ohm,5%,1/16W,TP,1005
R531	2007-007107	R-CHIP	cetus-31	3-C	100Kohm,1%,1/16W,TP,1005
R532	2007-000171	R-CHIP	cetus-31	4-B	0ohm,5%,1/16W,TP,1005
R533	2007-000171	R-CHIP	cetus-31	3-C	0ohm,5%,1/16W,TP,1005
R534	2007-007946	R-CHIP	cetus-33	3-D	470Kohm,1%,1/16W,TP,1005
R535	2007-000156	R-CHIP	cetus-33	3-D	30Kohm,5%,1/16W,TP,1005
R536	2007-007107	R-CHIP	cetus-37	2-D	100Kohm,1%,1/16W,TP,1005
R54	2007-000070	R-CHIP	cetus-34	3-D	0ohm,5%,1/10W,TP,1608
R540	2007-007107	R-CHIP	cetus-37	4-B	100Kohm,1%,1/16W,TP,1005
R541	2007-007142	R-CHIP	cetus-37	4-B	10Kohm,1%,1/16W,TP,1005
R542	2007-007107	R-CHIP	cetus-37	4-B	100Kohm,1%,1/16W,TP,1005
R543	2007-008304	R-CHIP	cetus-37	4-B	300KOHM,1%,1/16W,DA,TP,1005
R544	2007-007592	R-CHIP	cetus-33	3-B	270Kohm,1%,1/16W,DA,TP,1005
R545	2007-000060	R-CHIP	cetus-33	3-B	100Kohm,1%,1/10W,TP,1608
R546	2007-000052	R-CHIP	cetus-33	3-B	10Kohm,1%,1/10W,TP,1608
R547	2007-000052	R-CHIP	cetus-33	3-B	10Kohm,1%,1/10W,TP,1608
R548	2007-000060	R-CHIP	cetus-33	3-B	100Kohm,1%,1/10W,TP,1608
R549	2007-007334	R-CHIP	cetus-35	4-B	200Kohm,1%,1/16W,TP,1005
R550	2007-007142	R-CHIP	cetus-35	4-B	10Kohm,1%,1/16W,TP,1005
R551	2007-000265	R-CHIP	cetus-35	4-C	1.8Kohm,1%,1/10W,TP,1608
R552	2007-000171	R-CHIP	cetus-35	3-C	0ohm,5%,1/16W,TP,1005
R554	2007-000835	R-CHIP	cetus-6	2-C	39ohm,1%,1/10W,TP,1608
R555	2007-000171	R-CHIP	cetus-5	3-C	0ohm,5%,1/16W,TP,1005
R556	2007-008303	R-CHIP	cetus-6	3-C	27.40HM,1%,1/16W,DA,TP,1005
R557	2007-008362	R-CHIP	cetus-6	3-C	6490HM,1%,1/16W,DA,TP,1005
R558	2007-007307	R-CHIP	cetus-6	2-C	150ohm,1%,1/16W,DA,TP,1005
R56	2007-000070	R-CHIP	cetus-34	2-A	0ohm,5%,1/10W,TP,1608
R561	2007-000072	R-CHIP	cetus-29	1-B	47ohm,5%,1/10W,TP,1608
R562	2007-000157	R-CHIP	cetus-22	4-A	47Kohm,5%,1/16W,TP,1005
R563	2007-007142	R-CHIP	cetus-22	4-B	10Kohm,1%,1/16W,TP,1005
R564	2007-007528	R-CHIP	cetus-32	3-C	1.5Kohm,1%,1/16W,DA,TP,1005
R566	2007-008307	R-CHIP	cetus-32	2-C	5760HM,1%,1/16W,DA,TP,1005
R567	2007-007318	R-CHIP	cetus-32	3-B	1Kohm,1%,1/16W,DA,TP,1005

Ref.	RART NO.	DESCRIPTION	SHEET	Loc.	SPECIFICATIONS
R568	2007-000171	R-CHIP	cetus-32	2-D	0ohm,5%,1/16W,TP,1005
R569	2007-000029	R-CHIP	cetus-33	2-A	0ohm,5%,1/8W,TP,2012
R57	2007-002425	R-CHIP	cetus-34	2-C	1ohm,5%,1/10W,TP,1608
R570	2007-001139	R-CHIP	cetus-35	1-B	7.5Kohm,1%,1/10W,TP,1608
R571	2007-007334	R-CHIP	cetus-35	1-B	200Kohm,1%,1/16W,TP,1005
R572	2007-000701	R-CHIP	cetus-35	1-C	3.6Kohm,1%,1/10W,TP,1608
R573	2007-008300	R-CHIP	cetus-35	2-C	5.11KOHM,1%,1/16W,DA,TP,1005
R574	2007-000171	R-CHIP	cetus-35	2-C	0ohm,5%,1/16W,TP,1005
R577	2007-002970	R-CHIP	cetus-6	4-D	56ohm,5%,1/16W,TP,1005
R579	2007-000171	R-CHIP	cetus-6	4-B	0ohm,5%,1/16W,TP,1005
R58	2007-000070	R-CHIP	cetus-32	1-C	0ohm,5%,1/10W,TP,1608
R581	2007-002899	R-CHIP	cetus-34	4-C	10ohm,1%,1/10W,TP,1608
R582	2007-002899	R-CHIP	cetus-34	4-C	10ohm,1%,1/10W,TP,1608
R583	2007-002899	R-CHIP	cetus-34	4-C	10ohm,1%,1/10W,TP,1608
R584	2007-002899	R-CHIP	cetus-34	4-B	10ohm,1%,1/10W,TP,1608
R585	2007-007968	R-CHIP	cetus-34	4-A	12.7Kohm,1%,1/10W,TP,1608
R586	2007-000695	R-CHIP	cetus-29	1-B	3.3ohm,5%,1/10W,TP,1608
R587	2007-007142	R-CHIP	cetus-36	4-B	10Kohm,1%,1/16W,TP,1005
R589	2007-007107	R-CHIP	cetus-36	3-C	100Kohm,1%,1/16W,TP,1005
R591	2007-008304	R-CHIP	cetus-36	3-C	300KOHM,1%,1/16W,DA,TP,1005
R592	2007-007107	R-CHIP	cetus-26	4-A	100Kohm,1%,1/16W,TP,1005
R593	2007-007142	R-CHIP	cetus-36	3-B	10Kohm,1%,1/16W,TP,1005
R594	2007-007107	R-CHIP	cetus-26	4-A	100Kohm,1%,1/16W,TP,1005
R595	2007-000101	R-CHIP	cetus-36	3-B	82Kohm,5%,1/10W,TP,1608
R596	2007-007142	R-CHIP	cetus-26	4-A	10Kohm,1%,1/16W,TP,1005
R597	2007-008167	R-CHIP	cetus-36	2-B	120KOHM,1%,1/16W,DA,TP,1005
R598	2007-007489	R-CHIP	cetus-36	2-B	150Kohm,1%,1/16W,DA,TP,1005
R599	2007-007312	R-CHIP	cetus-36	2-B	20Kohm,1%,1/16W,TP,1005
R6	2007-000842	R-CHIP	cetus-27	3-D	3Kohm,1%,1/10W,TP,1608
R60	2007-007946	R-CHIP	cetus-32	4-C	470Kohm,1%,1/16W,TP,1005
R600	2007-007142	R-CHIP	cetus-36	1-B	10Kohm,1%,1/16W,TP,1005
R601	2007-007107	R-CHIP	cetus-36	1-B	100Kohm,1%,1/16W,TP,1005
R602	2007-008304	R-CHIP	cetus-36	1-B	300KOHM,1%,1/16W,DA,TP,1005
R603	2007-000140	R-CHIP	cetus-22	3-C	1Kohm,5%,1/16W,TP,1005
R604	2007-007142	R-CHIP	cetus-22	1-B	10Kohm,1%,1/16W,TP,1005
R605	2007-000287	R-CHIP	cetus-22	1-B	1000HM,1%,1/10W,DA,TP,1608
R606	2007-000157	R-CHIP	cetus-22	3-D	47Kohm,5%,1/16W,TP,1005
R607	2007-000287	R-CHIP	cetus-22	1-B	1000HM,1%,1/10W,DA,TP,1608
R608	2007-008307	R-CHIP	cetus-22	1-B	5760HM,1%,1/16W,DA,TP,1005

Ref.	RART NO.	DESCRIPTION	SHEET	Loc.	SPECIFICATIONS
R609	2007-008306	R-CHIP	cetus-22	1-C	5490HM,1%,1/16W,DA,TP,1005
R61	2007-007107	R-CHIP	cetus-32	2-C	100Kohm,1%,1/16W,TP,1005
R610	2007-007142	R-CHIP	cetus-22	3-D	10Kohm,1%,1/16W,TP,1005
R615	2007-008303	R-CHIP	cetus-6	2-C	27.40HM,1%,1/16W,DA,TP,1005
R616	2007-008314	R-CHIP	cetus-6	2-C	54.90HM,1%,1/16W,DA,TP,1005
R617	2007-007318	R-CHIP	cetus-6	4-C	1Kohm,1%,1/16W,DA,TP,1005
R618	2007-007766	R-CHIP	cetus-6	4-C	2Kohm,1%,1/16W,TP,1005
R619	2007-007312	R-CHIP	cetus-30	2-A	20Kohm,1%,1/16W,TP,1005
R62	2007-007142	R-CHIP	cetus-32	4-C	10Kohm,1%,1/16W,TP,1005
R620	2007-007318	R-CHIP	cetus-30	2-A	1Kohm,1%,1/16W,DA,TP,1005
R621	2007-000287	R-CHIP	cetus-22	1-C	1000HM,1%,1/10W,DA,TP,1608
R622	2007-000287	R-CHIP	cetus-22	3-C	1000HM,1%,1/10W,DA,TP,1608
R623	2007-000343	R-CHIP	cetus-22	3-C	120ohm,1%,1/10W,TP,1608
R624	2007-000287	R-CHIP	cetus-22	1-B	1000HM,1%,1/10W,DA,TP,1608
R625	2007-000172	R-CHIP	cetus-29	3-C	10ohm,5%,1/16W,TP,1005
R626	2007-000172	R-CHIP	cetus-29	3-C	10ohm,5%,1/16W,TP,1005
R627	2007-000172	R-CHIP	cetus-13	3-A	10ohm,5%,1/16W,TP,1005
R628	2007-000172	R-CHIP	cetus-13	3-A	10ohm,5%,1/16W,TP,1005
R629	2007-000172	R-CHIP	cetus-14	4-B	10ohm,5%,1/16W,TP,1005
R63	2007-007318	R-CHIP	cetus-32	3-B	1Kohm,1%,1/16W,DA,TP,1005
R630	2007-000172	R-CHIP	cetus-14	4-B	10ohm,5%,1/16W,TP,1005
R631	2007-008298	R-CHIP	cetus-7	1-D	49.90HM,1%,1/16W,DA,TP,1005
R632	2007-007306	R-CHIP	cetus-7	1-D	100ohm,1%,1/16W,DA,TP,1005
R633	2007-000171	R-CHIP	cetus-7	3-D	0ohm,5%,1/16W,TP,1005
R634	2007-008313	R-CHIP	cetus-7	4-C	3010HM,1%,1/16W,DA,TP,1005
R635	2007-007307	R-CHIP	cetus-7	4-C	150ohm,1%,1/16W,DA,TP,1005
R636	2007-008303	R-CHIP	cetus-7	4-B	27.40HM,1%,1/16W,DA,TP,1005
R638	2007-007306	R-CHIP	cetus-23	1-A	100ohm,1%,1/16W,DA,TP,1005
R639	2007-007107	R-CHIP	cetus-26	1-B	100Kohm,1%,1/16W,TP,1005
R64	2007-000171	R-CHIP	cetus-32	3-C	0ohm,5%,1/16W,TP,1005
R640	2007-007107	R-CHIP	cetus-26	1-B	100Kohm,1%,1/16W,TP,1005
R641	2007-007142	R-CHIP	cetus-26	2-B	10Kohm,1%,1/16W,TP,1005
R642	2007-007142	R-CHIP	cetus-19	4-B	10Kohm,1%,1/16W,TP,1005
R643	2007-007107	R-CHIP	cetus-19	4-B	100Kohm,1%,1/16W,TP,1005
R644	2007-007142	R-CHIP	cetus-19	4-B	10Kohm,1%,1/16W,TP,1005
R646	2007-000343	R-CHIP	cetus-11	4-A	120ohm,1%,1/10W,TP,1608
R647	2007-000172	R-CHIP	cetus-13	3-A	10ohm,5%,1/16W,TP,1005
R648	2007-000172	R-CHIP	cetus-13	3-A	10ohm,5%,1/16W,TP,1005
R649	2007-000172	R-CHIP	cetus-14	4-B	10ohm,5%,1/16W,TP,1005

Ref.	RART NO.	DESCRIPTION	SHEET	Loc.	SPECIFICATIONS
R65	2007-000736	R-CHIP	cetus-32	4-C	30Kohm,1%,1/10W,TP,1608
R650	2007-000172	R-CHIP	cetus-14	4-B	10ohm,5%,1/16W,TP,1005
R651	2007-007776	R-CHIP	cetus-8	1-B	604ohm,1%,1/10W,TP,1608
R652	2007-007307	R-CHIP	cetus-8	1-B	150ohm,1%,1/16W,DA,TP,1005
R653	2007-000171	R-CHIP	cetus-8	3-A	0ohm,5%,1/16W,TP,1005
R654	2007-008298	R-CHIP	cetus-7	1-D	49.90HM,1%,1/16W,DA,TP,1005
R655	2007-007306	R-CHIP	cetus-7	1-D	100ohm,1%,1/16W,DA,TP,1005
R656	2007-007306	R-CHIP	cetus-7	1-C	100ohm,1%,1/16W,DA,TP,1005
R657	2007-008298	R-CHIP	cetus-7	1-C	49.90HM,1%,1/16W,DA,TP,1005
R658	2007-008303	R-CHIP	cetus-7	4-B	27.40HM,1%,1/16W,DA,TP,1005
R659	2007-007318	R-CHIP	cetus-23	1-B	1Kohm,1%,1/16W,DA,TP,1005
R66	2007-000171	R-CHIP	cetus-32	2-D	0ohm,5%,1/16W,TP,1005
R660	2007-007766	R-CHIP	cetus-23	1-B	2Kohm,1%,1/16W,TP,1005
R664	2007-002970	R-CHIP	cetus-14	1-C	56ohm,5%,1/16W,TP,1005
R665	2007-002970	R-CHIP	cetus-14	1-C	56ohm,5%,1/16W,TP,1005
R666	2007-002970	R-CHIP	cetus-14	1-C	56ohm,5%,1/16W,TP,1005
R667	2007-002970	R-CHIP	cetus-14	2-C	56ohm,5%,1/16W,TP,1005
R668	2007-000172	R-CHIP	cetus-14	4-C	10ohm,5%,1/16W,TP,1005
R669	2007-002970	R-CHIP	cetus-14	2-C	56ohm,5%,1/16W,TP,1005
R67	2007-007142	R-CHIP	cetus-32	1-B	10Kohm,1%,1/16W,TP,1005
R670	2007-002970	R-CHIP	cetus-14	1-C	56ohm,5%,1/16W,TP,1005
R671	2007-002970	R-CHIP	cetus-14	1-C	56ohm,5%,1/16W,TP,1005
R672	2007-002970	R-CHIP	cetus-14	2-C	56ohm,5%,1/16W,TP,1005
R673	2007-002970	R-CHIP	cetus-14	1-C	56ohm,5%,1/16W,TP,1005
R674	2007-002970	R-CHIP	cetus-14	2-C	56ohm,5%,1/16W,TP,1005
R675	2007-002970	R-CHIP	cetus-14	1-C	56ohm,5%,1/16W,TP,1005
R676	2007-007307	R-CHIP	cetus-8	1-B	150ohm,1%,1/16W,DA,TP,1005
R677	2007-007776	R-CHIP	cetus-8	1-A	604ohm,1%,1/10W,TP,1608
R679	2007-000172	R-CHIP	cetus-9	1-B	10ohm,5%,1/16W,TP,1005
R68	2007-007142	R-CHIP	cetus-32	2-B	10Kohm,1%,1/16W,TP,1005
R680	2007-007307	R-CHIP	cetus-7	4-C	150ohm,1%,1/16W,DA,TP,1005
R681	2007-008313	R-CHIP	cetus-7	4-C	3010HM,1%,1/16W,DA,TP,1005
R682	3301-001233	BEAD-SMD	cetus-10	4-C	300ohm,1608,230mA,,,,0.35ohm
R683	3301-001233	BEAD-SMD	cetus-10	4-A	300ohm,1608,230mA,,,,0.35ohm
R684	2007-000171	R-CHIP	cetus-24	2-B	0ohm,5%,1/16W,TP,1005
R685	2007-000157	R-CHIP	cetus-24	2-B	47Kohm,5%,1/16W,TP,1005
R686	2007-000171	R-CHIP	cetus-24	2-B	0ohm,5%,1/16W,TP,1005
R687	2007-000157	R-CHIP	cetus-24	2-B	47Kohm,5%,1/16W,TP,1005
R688	2007-000157	R-CHIP	cetus-24	2-B	47Kohm,5%,1/16W,TP,1005

Ref.	RART NO.	DESCRIPTION	SHEET	Loc.	SPECIFICATIONS
R689	2007-007318	R-CHIP	cetus-24	2-B	1Kohm,1%,1/16W,DA,TP,1005
R69	2007-000171	R-CHIP	cetus-32	2-C	0ohm,5%,1/16W,TP,1005
R690	2007-007306	R-CHIP	cetus-30	2-C	100ohm,1%,1/16W,DA,TP,1005
R691	2007-000171	R-CHIP	cetus-19	3-C	0ohm,5%,1/16W,TP,1005
R694	2007-000171	R-CHIP	cetus-26	1-C	0ohm,5%,1/16W,TP,1005
R695	2007-007142	R-CHIP	cetus-33	3-B	10Kohm,1%,1/16W,TP,1005
R696	2007-000172	R-CHIP	cetus-13	3-A	10ohm,5%,1/16W,TP,1005
R697	2007-000172	R-CHIP	cetus-14	4-B	10ohm,5%,1/16W,TP,1005
R698	2007-002425	R-CHIP	cetus-10	4-B	1ohm,5%,1/10W,TP,1608
R699	2007-007142	R-CHIP	cetus-9	3-B	10Kohm,1%,1/16W,TP,1005
R7	2007-000157	R-CHIP	cetus-27	3-D	47Kohm,5%,1/16W,TP,1005
R70	2007-000171	R-CHIP	cetus-32	1-C	0ohm,5%,1/16W,TP,1005
R700	2007-007142	R-CHIP	cetus-9	3-B	10Kohm,1%,1/16W,TP,1005
R701	2007-007142	R-CHIP	cetus-9	3-B	10Kohm,1%,1/16W,TP,1005
R702	2007-007142	R-CHIP	cetus-9	3-B	10Kohm,1%,1/16W,TP,1005
R703	2007-007142	R-CHIP	cetus-9	3-B	10Kohm,1%,1/16W,TP,1005
R704	3301-001233	BEAD-SMD	cetus-10	4-A	300ohm,1608,230mA,,,,0.35ohm
R706	2007-007142	R-CHIP	cetus-9	3-B	10Kohm,1%,1/16W,TP,1005
R707	2007-007107	R-CHIP	cetus-9	3-C	100Kohm,1%,1/16W,TP,1005
R708	2007-008328	R-CHIP	cetus-9	2-C	121ohm,1%,1/16W,DA,TP,1005
R709	2007-007142	R-CHIP	cetus-9	2-B	10Kohm,1%,1/16W,TP,1005
R71	2007-000566	R-CHIP	cetus-33	2-B	220Kohm,5%,1/16W,DA,TP,1005
R711	2007-000172	R-CHIP	cetus-9	1-B	10ohm,5%,1/16W,TP,1005
R712	2007-007528	R-CHIP	cetus-9	1-B	1.5Kohm,1%,1/16W,DA,TP,1005
R713	2007-008015	R-CHIP	cetus-9	1-D	75ohm,1%,1/16W,DA,TP,1005
R715	2007-008015	R-CHIP	cetus-9	1-D	75ohm,1%,1/16W,DA,TP,1005
R716	2007-008015	R-CHIP	cetus-9	1-D	75ohm,1%,1/16W,DA,TP,1005
R719	3301-001233	BEAD-SMD	cetus-10	4-C	300ohm,1608,230mA,,,,0.35ohm
R72	2007-000939	R-CHIP	cetus-33	2-B	47Kohm,1%,1/10W,TP,1608
R720	2007-007107	R-CHIP	cetus-19	3-B	100Kohm,1%,1/16W,TP,1005
R721	2007-000172	R-CHIP	cetus-30	4-C	10ohm,5%,1/16W,TP,1005
R723	2007-000171	R-CHIP	cetus-19	3-C	0ohm,5%,1/16W,TP,1005
R724	2007-008269	R-CHIP	cetus-33	2-B	51KOHM,1%,1/16W,TP,1005
R725	2007-000156	R-CHIP	cetus-33	2-B	30Kohm,5%,1/16W,TP,1005
R726	2007-007142	R-CHIP	cetus-33	2-B	10Kohm,1%,1/16W,TP,1005
R727	2007-007142	R-CHIP	cetus-33	3-A	10Kohm,1%,1/16W,TP,1005
R728	2007-000343	R-CHIP	cetus-11	4-C	120ohm,1%,1/10W,TP,1608
R729	2007-000172	R-CHIP	cetus-13	3-A	10ohm,5%,1/16W,TP,1005
R73	2007-007142	R-CHIP	cetus-35	1-B	10Kohm,1%,1/16W,TP,1005

Ref.	RART NO.	DESCRIPTION	SHEET	Loc.	SPECIFICATIONS
R730	2007-000172	R-CHIP	cetus-14	4-B	10ohm,5%,1/16W,TP,1005
R731	2007-007619	R-CHIP	cetus-8	1-C	60.4ohm,1%,1/10W,TP,1608
R732	2007-007619	R-CHIP	cetus-8	1-C	60.4ohm,1%,1/10W,TP,1608
R733	2007-000172	R-CHIP	cetus-9	3-A	10ohm,5%,1/16W,TP,1005
R734	2007-008201	R-CHIP	cetus-7	1-B	113ohm,1%,1/10W,TP,1608
R735	2007-008309	R-CHIP	cetus-7	2-A	37.4OHM,1%,1/16W,DA,TP,1005
R736	2007-007221	R-CHIP	cetus-7	1-B	147ohm,1%,1/10W,TP,1608
R737	2007-008492	R-CHIP	cetus-7	1-B	226OHM,1%,1/16W,-,TP,1005
R738	2007-007318	R-CHIP	cetus-9	4-C	1Kohm,1%,1/16W,DA,TP,1005
R739	2007-007107	R-CHIP	cetus-9	3-C	100Kohm,1%,1/16W,TP,1005
R74	2007-007318	R-CHIP	cetus-35	2-B	1Kohm,1%,1/16W,DA,TP,1005
R740	2007-007107	R-CHIP	cetus-9	3-C	100Kohm,1%,1/16W,TP,1005
R741	2007-000835	R-CHIP	cetus-19	2-C	39ohm,1%,1/10W,TP,1608
R742	2007-000835	R-CHIP	cetus-19	2-C	39ohm,1%,1/10W,TP,1608
R743	2007-007107	R-CHIP	cetus-9	3-C	100Kohm,1%,1/16W,TP,1005
R744	2007-007318	R-CHIP	cetus-9	4-B	1Kohm,1%,1/16W,DA,TP,1005
R745	2007-007318	R-CHIP	cetus-9	4-B	1Kohm,1%,1/16W,DA,TP,1005
R746	2007-007724	R-CHIP	cetus-9	3-B	40.2ohm,1%,1/10W,TP,1608
R749	2007-000141	R-CHIP	cetus-19	1-C	2.2Kohm,5%,1/16W,TP,1005
R75	2007-000171	R-CHIP	cetus-35	2-D	0ohm,5%,1/16W,TP,1005
R752	2007-000141	R-CHIP	cetus-19	2-C	2.2Kohm,5%,1/16W,TP,1005
R753	2007-000141	R-CHIP	cetus-19	2-C	2.2Kohm,5%,1/16W,TP,1005
R754	2007-008167	R-CHIP	cetus-36	3-A	120KOHM,1%,1/16W,DA,TP,1005
R755	2007-000172	R-CHIP	cetus-13	3-A	10ohm,5%,1/16W,TP,1005
R756	2007-000172	R-CHIP	cetus-13	3-A	10ohm,5%,1/16W,TP,1005
R757	2007-000172	R-CHIP	cetus-14	4-B	10ohm,5%,1/16W,TP,1005
R758	2007-000172	R-CHIP	cetus-14	4-B	10ohm,5%,1/16W,TP,1005
R76	2007-007142	R-CHIP	cetus-5	4-B	10Kohm,1%,1/16W,TP,1005
R761	2007-000141	R-CHIP	cetus-19	1-C	2.2Kohm,5%,1/16W,TP,1005
R762	2007-000172	R-CHIP	cetus-19	2-C	10ohm,5%,1/16W,TP,1005
R763	2007-000172	R-CHIP	cetus-19	2-C	10ohm,5%,1/16W,TP,1005
R764	2007-000143	R-CHIP	cetus-15	1-B	4.7Kohm,5%,1/16W,TP,1005
R765	2007-008608	R-CHIP	cetus-36	3-A	267kohm,1%,1/16W,TP,1005
R766	2007-000171	R-CHIP	cetus-36	3-A	0ohm,5%,1/16W,TP,1005
R767	2007-007142	R-CHIP	cetus-15	1-D	10Kohm,1%,1/16W,TP,1005
R768	2007-000143	R-CHIP	cetus-15	1-B	4.7Kohm,5%,1/16W,TP,1005
R769	2007-007142	R-CHIP	cetus-16	2-D	10Kohm,1%,1/16W,TP,1005
R77	2007-007142	R-CHIP	cetus-5	3-B	10Kohm,1%,1/16W,TP,1005
R770	2007-007100	R-CHIP	cetus-17	1-C	10MOHM,5%,1/16W,DA,TP,1005

Ref.	RART NO.	DESCRIPTION	SHEET	Loc.	SPECIFICATIONS
R771	2007-007100	R-CHIP	cetus-17	1-B	10MOHM,5%,1/16W,DA,TP,1005
R772	2007-007142	R-CHIP	cetus-15	1-C	10Kohm,1%,1/16W,TP,1005
R773	2007-007312	R-CHIP	cetus-16	2-C	20Kohm,1%,1/16W,TP,1005
R774	2007-007107	R-CHIP	cetus-15	2-B	100Kohm,1%,1/16W,TP,1005
R775	2007-007142	R-CHIP	cetus-15	1-B	10Kohm,1%,1/16W,TP,1005
R776	2007-007142	R-CHIP	cetus-16	3-D	10Kohm,1%,1/16W,TP,1005
R777	2007-007142	R-CHIP	cetus-16	2-D	10Kohm,1%,1/16W,TP,1005
R778	2007-007142	R-CHIP	cetus-15	1-B	10Kohm,1%,1/16W,TP,1005
R78	2007-007877	R-CHIP	cetus-34	1-B	0.004ohm,1%,1W,TP,6432
R781	2007-007142	R-CHIP	cetus-16	2-D	10Kohm,1%,1/16W,TP,1005
R782	2007-007142	R-CHIP	cetus-15	1-C	10Kohm,1%,1/16W,TP,1005
R783	2007-007312	R-CHIP	cetus-16	2-D	20Kohm,1%,1/16W,TP,1005
R784	2007-007142	R-CHIP	cetus-16	3-D	10Kohm,1%,1/16W,TP,1005
R785	2007-007107	R-CHIP	cetus-15	2-B	100Kohm,1%,1/16W,TP,1005
R787	2007-007142	R-CHIP	cetus-16	2-D	10Kohm,1%,1/16W,TP,1005
R788	2007-007142	R-CHIP	cetus-15	3-D	10Kohm,1%,1/16W,TP,1005
R79	2007-000070	R-CHIP	cetus-34	1-B	0ohm,5%,1/10W,TP,1608
R790	2007-007107	R-CHIP	cetus-16	3-C	100Kohm,1%,1/16W,TP,1005
R791	2007-007107	R-CHIP	cetus-16	3-C	100Kohm,1%,1/16W,TP,1005
R792	2007-000171	R-CHIP	cetus-15	3-D	0ohm,5%,1/16W,TP,1005
R793	2007-007142	R-CHIP	cetus-15	1-C	10Kohm,1%,1/16W,TP,1005
R794	2007-008026	R-CHIP	cetus-16	3-D	56ohm,1%,1/16W,DA,TP,1005
R795	2007-000171	R-CHIP	cetus-15	3-D	0ohm,5%,1/16W,TP,1005
R796	2007-000172	R-CHIP	cetus-16	4-C	10ohm,5%,1/16W,TP,1005
R797	2007-002970	R-CHIP	cetus-15	3-D	56ohm,5%,1/16W,TP,1005
R798	2007-002970	R-CHIP	cetus-15	3-D	56ohm,5%,1/16W,TP,1005
R799	2007-008026	R-CHIP	cetus-16	3-D	56ohm,1%,1/16W,DA,TP,1005
R8	2007-007107	R-CHIP	cetus-27	3-D	100Kohm,1%,1/16W,TP,1005
R80	2007-007877	R-CHIP	cetus-34	1-D	0.004ohm,1%,1W,TP,6432
R800	2007-007142	R-CHIP	cetus-15	1-C	10Kohm,1%,1/16W,TP,1005
R801	2007-000171	R-CHIP	cetus-15	3-C	0ohm,5%,1/16W,TP,1005
R802	2007-000171	R-CHIP	cetus-15	3-D	0ohm,5%,1/16W,TP,1005
R803	2007-000171	R-CHIP	cetus-15	3-C	0ohm,5%,1/16W,TP,1005
R804	2007-008578	R-CHIP	cetus-15	2-C	48.7OHM,1%,1/16W,TP,1005
R805	2007-008492	R-CHIP	cetus-15	1-B	226OHM,1%,1/16W,-,TP,1005
R806	2007-008293	R-CHIP	cetus-4	2-B	475OHM,1%,1/16W,DA,TP,1005
R807	2007-007318	R-CHIP	cetus-4	3-C	1Kohm,1%,1/16W,DA,TP,1005
R808	2007-007318	R-CHIP	cetus-4	3-C	1Kohm,1%,1/16W,DA,TP,1005
R809	2007-008298	R-CHIP	cetus-4	3-B	49.9OHM,1%,1/16W,DA,TP,1005

Ref.	RART NO.	DESCRIPTION	SHEET	Loc.	SPECIFICATIONS
R81	2007-000070	R-CHIP	cetus-34	1-D	0ohm,5%,1/10W,TP,1608
R810	2007-008298	R-CHIP	cetus-4	3-B	49.90HM,1%,1/16W,DA,TP,1005
R811	2007-008298	R-CHIP	cetus-4	3-B	49.90HM,1%,1/16W,DA,TP,1005
R812	2007-007142	R-CHIP	cetus-26	3-B	10Kohm,1%,1/16W,TP,1005
R813	2007-007107	R-CHIP	cetus-26	3-B	100Kohm,1%,1/16W,TP,1005
R814	2007-007107	R-CHIP	cetus-26	3-B	100Kohm,1%,1/16W,TP,1005
R815	2007-007142	R-CHIP	cetus-15	1-D	10Kohm,1%,1/16W,TP,1005
R816	2007-007142	R-CHIP	cetus-15	1-D	10Kohm,1%,1/16W,TP,1005
R817	2007-007142	R-CHIP	cetus-15	1-D	10Kohm,1%,1/16W,TP,1005
R818	2007-007142	R-CHIP	cetus-15	1-D	10Kohm,1%,1/16W,TP,1005
R819	2007-000172	R-CHIP	cetus-15	4-A	10ohm,5%,1/16W,TP,1005
R82	2007-007306	R-CHIP	cetus-34	4-B	100ohm,1%,1/16W,DA,TP,1005
R822	2007-007142	R-CHIP	cetus-15	3-B	10Kohm,1%,1/16W,TP,1005
R825	2007-002970	R-CHIP	cetus-15	3-C	56ohm,5%,1/16W,TP,1005
R827	2007-007312	R-CHIP	cetus-15	1-C	20Kohm,1%,1/16W,TP,1005
R83	2007-007306	R-CHIP	cetus-34	4-B	100ohm,1%,1/16W,DA,TP,1005
R830	2007-007221	R-CHIP	cetus-15	1-B	147ohm,1%,1/10W,TP,1608
R831	2007-000172	R-CHIP	cetus-16	4-C	10ohm,5%,1/16W,TP,1005
R832	2007-008201	R-CHIP	cetus-15	1-A	113ohm,1%,1/10W,TP,1608
R833	2007-007568	R-CHIP	cetus-36	2-D	0.0330HM,1%,1W,TP,6432
R834	2007-008294	R-CHIP	cetus-28	2-C	330HM,1%,1/16W,DA,TP,1005
R835	2007-007312	R-CHIP	cetus-28	2-C	20Kohm,1%,1/16W,TP,1005
R836	2007-008298	R-CHIP	cetus-4	3-B	49.90HM,1%,1/16W,DA,TP,1005
R837	2007-000231	R-CHIP	cetus-25	1-C	1.3Kohm,1%,1/10W,TP,1608
R838	2007-007318	R-CHIP	cetus-17	3-D	1Kohm,1%,1/16W,DA,TP,1005
R839	2007-007142	R-CHIP	cetus-15	1-C	10Kohm,1%,1/16W,TP,1005
R84	2007-002425	R-CHIP	cetus-34	4-C	1ohm,5%,1/10W,TP,1608
R840	2007-007142	R-CHIP	cetus-15	1-C	10Kohm,1%,1/16W,TP,1005
R841	2007-007142	R-CHIP	cetus-15	1-D	10Kohm,1%,1/16W,TP,1005
R842	2007-007142	R-CHIP	cetus-15	1-D	10Kohm,1%,1/16W,TP,1005
R843	2007-007142	R-CHIP	cetus-15	1-C	10Kohm,1%,1/16W,TP,1005
R844	2007-007142	R-CHIP	cetus-15	1-C	10Kohm,1%,1/16W,TP,1005
R845	2007-000171	R-CHIP	cetus-15	3-B	0ohm,5%,1/16W,TP,1005
R846	2007-007142	R-CHIP	cetus-15	1-D	10Kohm,1%,1/16W,TP,1005
R847	2007-007142	R-CHIP	cetus-15	1-D	10Kohm,1%,1/16W,TP,1005
R848	2007-007142	R-CHIP	cetus-15	1-C	10Kohm,1%,1/16W,TP,1005
R849	2007-007142	R-CHIP	cetus-15	1-D	10Kohm,1%,1/16W,TP,1005
R85	2007-007946	R-CHIP	cetus-34	4-C	470Kohm,1%,1/16W,TP,1005
R850	2007-007142	R-CHIP	cetus-15	1-D	10Kohm,1%,1/16W,TP,1005

Ref.	RART NO.	DESCRIPTION	SHEET	Loc.	SPECIFICATIONS
R851	2007-007142	R-CHIP	cetus-15	1-C	10Kohm,1%,1/16W,TP,1005
R852	2007-007312	R-CHIP	cetus-15	4-B	20Kohm,1%,1/16W,TP,1005
R853	2007-007142	R-CHIP	cetus-15	1-C	10Kohm,1%,1/16W,TP,1005
R854	2007-007142	R-CHIP	cetus-15	1-C	10Kohm,1%,1/16W,TP,1005
R855	2007-007142	R-CHIP	cetus-15	1-C	10Kohm,1%,1/16W,TP,1005
R857	2007-007142	R-CHIP	cetus-15	1-C	10Kohm,1%,1/16W,TP,1005
R859	2007-007142	R-CHIP	cetus-15	1-C	10Kohm,1%,1/16W,TP,1005
R86	2007-008304	R-CHIP	cetus-34	4-C	300KOHM,1%,1/16W,DA,TP,1005
R861	2007-007142	R-CHIP	cetus-16	3-A	10Kohm,1%,1/16W,TP,1005
R862	2007-007142	R-CHIP	cetus-16	3-A	10Kohm,1%,1/16W,TP,1005
R863	2007-007142	R-CHIP	cetus-16	3-A	10Kohm,1%,1/16W,TP,1005
R864	2007-007142	R-CHIP	cetus-16	3-A	10Kohm,1%,1/16W,TP,1005
R865	2007-007142	R-CHIP	cetus-16	1-B	10Kohm,1%,1/16W,TP,1005
R866	2007-000171	R-CHIP	cetus-16	4-A	0ohm,5%,1/16W,TP,1005
R867	2007-008330	R-CHIP	cetus-16	3-A	22.6OHM,1%,1/16W,DA,TP,1005
R869	2007-007312	R-CHIP	cetus-15	1-C	20Kohm,1%,1/16W,TP,1005
R87	2007-008559	R-CHIP	cetus-34	4-B	13.3KOHM,1%,1/10W,TP,1608
R870	2007-000143	R-CHIP	cetus-28	2-B	4.7Kohm,5%,1/16W,TP,1005
R871	2007-007142	R-CHIP	cetus-28	1-B	10Kohm,1%,1/16W,TP,1005
R872	2007-007318	R-CHIP	cetus-28	1-B	1Kohm,1%,1/16W,DA,TP,1005
R873	2007-007318	R-CHIP	cetus-28	1-B	1Kohm,1%,1/16W,DA,TP,1005
R874	2007-007107	R-CHIP	cetus-36	3-D	100Kohm,1%,1/16W,TP,1005
R875	2007-007312	R-CHIP	cetus-36	2-D	20Kohm,1%,1/16W,TP,1005
R876	2007-007311	R-CHIP	cetus-36	2-C	22Kohm,1%,1/16W,TP,1005
R877	2007-008362	R-CHIP	cetus-36	2-C	649OHM,1%,1/16W,DA,TP,1005
R878	2007-007142	R-CHIP	cetus-28	2-A	10Kohm,1%,1/16W,TP,1005
R879	2007-000143	R-CHIP	cetus-28	1-A	4.7Kohm,5%,1/16W,TP,1005
R88	2007-008559	R-CHIP	cetus-34	3-C	13.3KOHM,1%,1/10W,TP,1608
R880	2007-001313	R-CHIP	cetus-18	4-C	330ohm,5%,1/16W,DA,TP,1005
R881	2007-007142	R-CHIP	cetus-18	4-B	10Kohm,1%,1/16W,TP,1005
R882	2007-007142	R-CHIP	cetus-18	4-B	10Kohm,1%,1/16W,TP,1005
R883	2007-000157	R-CHIP	cetus-18	3-A	47Kohm,5%,1/16W,TP,1005
R884	2007-000157	R-CHIP	cetus-18	3-A	47Kohm,5%,1/16W,TP,1005
R885	2007-000157	R-CHIP	cetus-18	3-A	47Kohm,5%,1/16W,TP,1005
R886	2007-000157	R-CHIP	cetus-18	3-A	47Kohm,5%,1/16W,TP,1005
R887	2007-007306	R-CHIP	cetus-18	4-A	100ohm,1%,1/16W,DA,TP,1005
R888	2007-007306	R-CHIP	cetus-18	4-B	100ohm,1%,1/16W,DA,TP,1005
R889	2007-007142	R-CHIP	cetus-18	4-A	10Kohm,1%,1/16W,TP,1005
R89	2007-000763	R-CHIP	cetus-34	4-B	330ohm,1%,1/10W,TP,1608

Ref.	RART NO.	DESCRIPTION	SHEET	Loc.	SPECIFICATIONS
R890	2007-007142	R-CHIP	cetus-18	4-B	10Kohm,1%,1/16W,TP,1005
R891	2007-007142	R-CHIP	cetus-18	4-B	10Kohm,1%,1/16W,TP,1005
R892	2007-007142	R-CHIP	cetus-18	4-B	10Kohm,1%,1/16W,TP,1005
R893	2007-007306	R-CHIP	cetus-18	4-B	100ohm,1%,1/16W,DA,TP,1005
R894	2007-007142	R-CHIP	cetus-18	4-B	10Kohm,1%,1/16W,TP,1005
R9	2007-007142	R-CHIP	cetus-27	3-D	10Kohm,1%,1/16W,TP,1005
R90	2007-000763	R-CHIP	cetus-34	3-B	330ohm,1%,1/10W,TP,1608
R91	2007-007766	R-CHIP	cetus-34	4-B	2Kohm,1%,1/16W,TP,1005
R92	2007-008269	R-CHIP	cetus-34	4-B	51KOHM,1%,1/16W,TP,1005
R93	2007-007766	R-CHIP	cetus-34	3-B	2Kohm,1%,1/16W,TP,1005
R94	2007-000516	R-CHIP	cetus-34	4-B	2.7Kohm,1%,1/10W,TP,1608
R95	2007-007107	R-CHIP	cetus-34	4-B	100Kohm,1%,1/16W,TP,1005
R96	2007-007942	R-CHIP	cetus-34	4-B	1Mohm,1%,1/16W,DA,TP,1005
R97	2007-008305	R-CHIP	cetus-34	3-B	510KOHM,1%,1/16W,DA,TP,1005
R98	2007-007946	R-CHIP	cetus-34	4-B	470Kohm,1%,1/16W,TP,1005
RA1	2011-001402	R-NET	cetus-13	1-C	560HM,5%,1/16W,L,CHIP,8P,TP
RA500	2011-001264	R-NET	cetus-13	4-C	10ohm,5%,1/16W,L,CHIP,8P,TP,2.0x1.0x0.35mm
RA501	2011-001402	R-NET	cetus-13	2-C	560HM,5%,1/16W,L,CHIP,8P,TP
SW500	3404-001052	SWITCH-TACT	cetus-26	4-C	12V,50mA,160gf,5.2x5.2x0.8mm,SPST
SW501	3404-001052	SWITCH-TACT	cetus-30	1-C	12V,50mA,160gf,5.2x5.2x0.8mm,SPST
TC501	2404-001020	C-TA,CHIP	cetus-19	3-B	10uF,20%,10V,GP,TP,3216
TH1	1404-001248	THERMISTOR-PTC	cetus-20	1-C	0.290HM,-,-,24VAC,40A,0.75A,-
TH500	1404-001065	THERMISTOR-PTC	cetus-28	4-B	0.110HM,-,-,13.2VAC,40A,1.5A,TP
TH501	1404-001259	THERMISTOR-NTC	cetus-27	3-D	100KOHM,-,4390K,0.9MW/C,-,-,TP
TH502	1404-001065	THERMISTOR-PTC	cetus-28	4-D	0.110HM,-,-,13.2VAC,40A,1.5A,TP
U1	2203-006039	C-CER,CHIP	cetus-22	2-A	1NF,10%,2KV,X7R,TP,3216
U10-1	1003-000263	IC-PER. DRIVER	cetus-24	4-B	TDA1308T,SOP,8P,5mm,DUAL,-,ST,
U10-2	1003-000263	IC-PER. DRIVER	cetus-24	4-A	TDA1308T,SOP,8P,5mm,DUAL,-,ST,
U11	1201-001559	IC-AUDIO AMP	cetus-24	2-C	4863,TSSOP,20P,173MIL,DUAL,98dB
U12	0801-002014	IC-CMOS LOGIC	cetus-37	3-A	7S32,OR GATE,SOT353,5P,51MIL,SINGLE,TP
U13	0903-001313	IC-MICROCOMPUTER	cetus-25	4-A	HD64F2160YV,32BIT,QFP,144P,630MIL,10MHZ, TR,CMOS
U14	0801-002195	IC-CMOS LOGIC	cetus-19	2-A	7S08,AND GATE,SOT-25,5P,63MIL,
U15	0801-002195	IC-CMOS LOGIC	cetus-19	1-A	7S08,AND GATE,SOT-25,5P,63MIL,
U16	1205-002354	IC-CLOCK GENERATOR	cetus-4	3-B	ICS950810CG-T,TSSOP,56P
U17	1203-001028	IC-POWER SUPERVISOR	cetus-21	4-A	2563,SOP,28P,300MIL
U18-1	0904-001719	IC-I/O CONTROLLER	cetus-15	4-A	82801DBM,32BIT,MBGA,421P,1220MIL,33,TR,CMOS
U18-2	0904-001719	IC-I/O CONTROLLER	cetus-16	3-A	82801DBM,32BIT,MBGA,421P,1220MIL,33,TR,CMOS
U18-3	0904-001719	IC-I/O CONTROLLER	cetus-17	3-A	82801DBM,32BIT,MBGA,421P,1220MIL,33,TR,CMOS

Ref.	RART NO.	DESCRIPTION	SHEET	Loc.	SPECIFICATIONS
U19-1	0904-001782	IC-BUS CONTROLLER	cetus-20	3-A	R5C591-CSP277,32Bit,CSP,277P
U19-2	0904-001782	IC-BUS CONTROLLER	cetus-21	2-B	R5C591-CSP277,32Bit,CSP,277P
U20	0801-002195	IC-CMOS LOGIC	cetus-15	3-A	7S08,AND GATE,SOT-25,5P,63MIL,
U21	1203-002364	IC-RESET	cetus-17	1-D	TPS3809L30DBVR,SOT-23,3P,63MIL
U22	0801-002252	IC-CMOS LOGIC	cetus-27	1-C	7S14,INVERTER,SOT-25,5P,63MIL,
U23	1203-001964	IC-VOL. REFERENCE	cetus-36	3-D	1772,SOT-23,6P,60MIL,PLASTIC,1.8V/3.3V
U24	1103-001239	IC-EEPROM	cetus-20	2-B	524C20,256x8,TSSOP,8P
U25	0801-002195	IC-CMOS LOGIC	cetus-27	4-B	7S08,AND GATE,SOT-25,5P,63MIL,
U26	0801-002195	IC-CMOS LOGIC	cetus-27	4-C	7S08,AND GATE,SOT-25,5P,63MIL,
U27	0801-002195	IC-CMOS LOGIC	cetus-27	4-B	7S08,AND GATE,SOT-25,5P,63MIL,
U29	1107-001288	IC-FLASH MEMORY	cetus-18	4-A	49LF004A,512Kx8,PLCC,32P
U3	1209-001382	IC-TEMP. TRANSDUCER	cetus-5	3-A	ADM1032ARM,SOIC,8P,118MIL
U4-1	0904-001848	IC-MEMORY CONT.	cetus-7	3-A	Montara GME,64Bit,TR,732P
U4-2	0904-001848	IC-MEMORY CONT.	cetus-8	3-A	Montara GME,64Bit,TR,732P
U4-3	0904-001848	IC-MEMORY CONT.	cetus-9	3-B	Montara GME,64Bit,TR,732P
U4-4	0904-001848	IC-MEMORY CONT.	cetus-10	3-B	Montara GME,64Bit,TR,732P
U4-5	0904-001848	IC-MEMORY CONT.	cetus-10	2-B	Montara GME,64Bit,TR,732P
U5	1203-002972	IC-POSI.FIXED REG.	cetus-23	4-D	TPS793475DBVR,SOT-23,5P,2.9X1.6MM
U500	1201-000167	IC-OP AMP	cetus-27	3-D	KA358,SOP,TP,8P,150MIL,DUAL,100V/MV
U501	0505-000275	FET-SILICON	cetus-31	3-C	SI4435DY,P,-30V,+8.0A,0.014ohm,2.5W,SO-8
U502	1203-002788	IC-SWITCH REG.	cetus-31	2-C	LTC3728LCUH,QFN,32P,5X5MM
U503	0505-000275	FET-SILICON	cetus-33	3-D	SI4435DY,P,-30V,+8.0A,0.014ohm,2.5W,SO-8
U504	0505-000275	FET-SILICON	cetus-37	4-B	SI4435DY,P,-30V,+8.0A,0.014ohm,2.5W,SO-8
U505	1203-002511	IC-PWM CONTROLLER	cetus-33	3-B	MB3887,SSOP,24P,305MIL
U506	1203-002746	IC-SWITCH REG.	cetus-34	3-C	LTC3735EG,SSOP,36P,12.8X5.3MM
U507	1001-001197	IC-ANALOG MULTIPLEX	cetus-22	4-B	PI3L100,CMOS,QSOP,16P,150MIL
U508	1203-002486	IC-PWM CONTROLLER	cetus-32	2-C	ISL6225CA-T,SSOP,28P,153MIL
U509	1203-002486	IC-PWM CONTROLLER	cetus-35	3-B	ISL6225CA-T,SSOP,28P,153MIL
U510	1203-002464	IC-SWITCH CUR. REG.	cetus-36	3-B	LTC1871,MSOP,10P,118MIL
U511	0801-002014	IC-CMOS LOGIC	cetus-22	3-D	7S32,OR GATE,SOT353,5P,51MIL,SINGLE,TP
U512-1	0904-001756	IC-PHERIPHERAL CONT.	cetus-22	4-C	82562EZ,3Bit,BGA,196P,15x15mm,50MHz,TR,
U512-2	0904-001756	IC-PHERIPHERAL CONT.	cetus-22	2-B	82562EZ,3Bit,BGA,196P,15x15mm,50MHz,TR,
U513	0904-001572	IC-I/O CONTROLLER	cetus-29	3-B	PC87391,8BIT,TQFP,100P,551MIL,48MHZ,TR,CMOS
U514	1105-001580	IC-DRAM	cetus-11	1-A	HYB25D512160,32Mx16Bit,TSOPII,66P
U515	1105-001580	IC-DRAM	cetus-11	3-A	HYB25D512160,32Mx16Bit,TSOPII,66P
U516	1203-002203	IC-POSI.AJUST REG.	cetus-26	2-C	LP2951,SOP,8P,153MIL,PLASTIC,3.267/3.333V
U517	1201-000167	IC-OP AMP	cetus-33	2-B	KA358,SOP,TP,8P,150MIL,DUAL,100V/MV
U518	1105-001580	IC-DRAM	cetus-11	1-C	HYB25D512160,32Mx16Bit,TSOPII,66P
U519	1201-001125	IC-OP AMP	cetus-19	3-B	75S01,SOP,5P,63MIL,SINGLE,100d

Ref.	RART NO.	DESCRIPTION	SHEET	Loc.	SPECIFICATIONS
U520	1203-002062	IC-POSI.ADJUST REG.	cetus-36	4-A	5219,SOT-23,5P,63MIL
U521	1105-001580	IC-DRAM	cetus-11	3-C	HYB25D512160,32Mx16Bit,TSOPII,66P
U522	1001-001097	IC-ANALOG SWITCH	cetus-19	2-B	FST3125,BUS SWITCH,TSSOP,14P,173MIL,QUAD, 7V,-40TO+85C
U523	0801-002462	IC-CMOS LOGIC	cetus-28	2-C	7SZ125,GATE BUFFER,SOT-23,5P,63MIL,SINGLE,TP
U524	1103-001244	IC-EEPROM	cetus-16	2-A	93LC46B,64X16BIT,SOP,8P,5X4MM,-,4.5/5.5V
U525	1009-001010	IC-HALL EFFECT S/W	cetus-19	2-A	A3212ELH-SAMSUNG,SC-59A,3P,82MIL,TP,BICMOS
U526	0505-000275	FET-SILICON	cetus-19	4-A	SI4435DY,P,-30V,+8.0A,0.014ohm,2.5W,SO-8
U6	0801-002143	IC-CMOS LOGIC	cetus-24	4-D	7S32,OR GATE,SOT-23,5P,63MIL,SINGLE,TP
U7	1205-002251	IC-INTERFACE	cetus-23	3-B	CS4202,LQFP,48P,276MIL,PLASTIC,5V,1.25W, OTO+70C,TR,-
U8	0801-002706	IC-CMOS LOGIC	cetus-24	4-C	7S02,NOR GATE,SOT-23,5P,62MIL,-,TP
U9	0801-002143	IC-CMOS LOGIC	cetus-24	4-C	7S32,OR GATE,SOT-23,5P,63MIL,SINGLE,TP
Y1	2801-004202	CRYSTAL-SMD	cetus-23	4-B	24.576MHz,30ppm,28-ACF,12.0pF,50ohm,TP
Y2	2801-004200	CRYSTAL-SMD	cetus-25	4-A	10MHz,30ppm,28-ACF,16.0pF,80ohm,TP
Y3	2801-004201	CRYSTAL-SMD	cetus-4	3-B	14.31818MHZ,50PPM,-,15.0PF,500HM,REEL
Y4	2801-003898	CRYSTAL-SMD	cetus-20	2-C	24.576MHz,50ppm,28-ACC,12pF,50ohm,TP
Y500	2801-003892	CRYSTAL-SMD	cetus-22	4-C	25MHZ,50PPM,28-ACC,10PF,500HM,TP
Y501	2801-003856	CRYSTAL-SMD	cetus-17	1-B	0.032768MHz,20ppm,28-ACP,7pF,65000ohm,TP
ZD500-1	0406-001005	DIODE-TVS	cetus-33	1-B	SM05,6V/1mA,300,SOT-23
ZD500-2	0406-001005	DIODE-TVS	cetus-33	1-B	SM05,6V/1mA,300,SOT-23
ZD501	0403-000277	DIODE-ZENER	cetus-33	3-A	MMBZ5226B,3.14-3.47V,225MW,SOT-23,TP
ZD502	0403-000277	DIODE-ZENER	cetus-33	3-A	MMBZ5226B,3.14-3.47V,225MW,SOT-23,TP
ZD503	0406-001005	DIODE-TVS	cetus-37	3-A	SM05,6V/1mA,300,SOT-23