


# DBK-303 & DBK-315

## 25-Pin D-Sub Double Shielded Twisted Pair TDIF, Compatible With Tascam\*

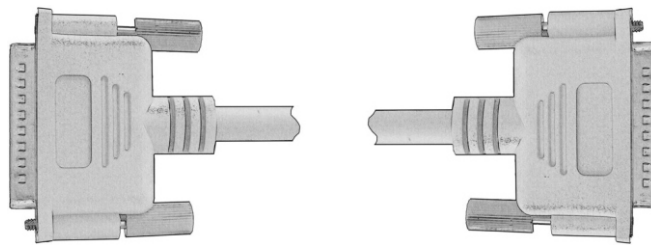

### WIRE COLOR CODING

1	ORANGE / RED 1	13	}	TWISTED PAIR
14	ORANGE / BLACK 1	25		
2	GRAY / RED 1	12	}	TWISTED PAIR
15	GRAY / BLACK 1	24		
3	WHITE / RED 1	11	}	TWISTED PAIR
15	WHITE / BLACK 1	23		
4	YELLOW / RED 1	10	}	TWISTED PAIR
17	YELLOW / BLACK 1	22		
5	PINK / RED 1	9	}	TWISTED PAIR
9	PINK / BLACK 1	5		
7	ORANGE / RED 2	7	}	TWISTED PAIR
18	ORANGE / BLACK 2	21		
6	GRAY / RED 2	8	}	TWISTED PAIR
19	GRAY / BLACK 2	20		
8	WHITE / RED 2	6	}	TWISTED PAIR
20	WHITE / BLACK 2	19		
21	YELLOW / RED 2	18	}	TWISTED PAIR
●	YELLOW / BLACK 2	●		
10	PINK / RED 2	4	}	TWISTED PAIR
22	PINK / BLACK 2	17		
11	ORANGE / RED 3	3	}	TWISTED PAIR
23	ORANGE / BLACK 3	16		
12	GRAY / RED 3	2	}	TWISTED PAIR
24	GRAY / BLACK 3	15		
13	WHITE / RED 3	1	}	TWISTED PAIR
25	WHITE / BLACK 3	14		

# Hosa

Construction of wire for DBK-315		
Conductor	No. of conductor	13P
	Material	Stranded; tinned copper wire
	AWG size & composition	28 AWG (7 strands / 0.127mm)
	Diameter	Nominal 0.38mm
Insulation	Material	Semi-rigid Polyvinyl chloride (SR-PVC)
	Nom. thickness	0.28mm
	Nom. Diameter	0.95mm
	Rated Temperature	80
	Rated Voltage	300 V
Shield	Material & Manner	Overall Aluminum / polyester tape Wrapped, A1, side faced out.
	Overlap	Min. 25 %

Drain wire	Material	Stranded; tinned copper wire
	AWG size & composition	24 AWG (7 strands / 0.20mm)
	Diameter	Nominal 0.60mm
	Note	The drain wire is laid in between Aluminum / polyester shield and braid.
Braid	Material	Tinned copper wire
	Size & composition	85%
	Coverage	Nominal
Jacket	Material	Polyvinyl chloride (PVC)
	Nom. thickness	1.0mm
	Overall diameter	9.0+1-0.15mm
Jacket printing	<b>JAY ANE 146924 AWM 2464 VW-1 80 300V 28 AWG CSALL101096</b> AWM A/B 1/II 80 300V FTI 28 AWG	