

High Brightness Deep Blue LED Lamp




5mm Through-Hole Package


BL-LBDB5N30C series

FEATURES	APPLICATIONS
<ul style="list-style-type: none"> • High Brightness Deep Blue (450nm) LED. • GaN on Sapphire die. • 5mm round resin mold. • Water Clear Lens. • Wide viewing angle 	<ul style="list-style-type: none"> • Dental and Medical applications • Displays and signs • Instrumentation. • Toys and electronics • Decorative /Accent Lighting

PACKAGE OUTLINE DIMENSIONS:

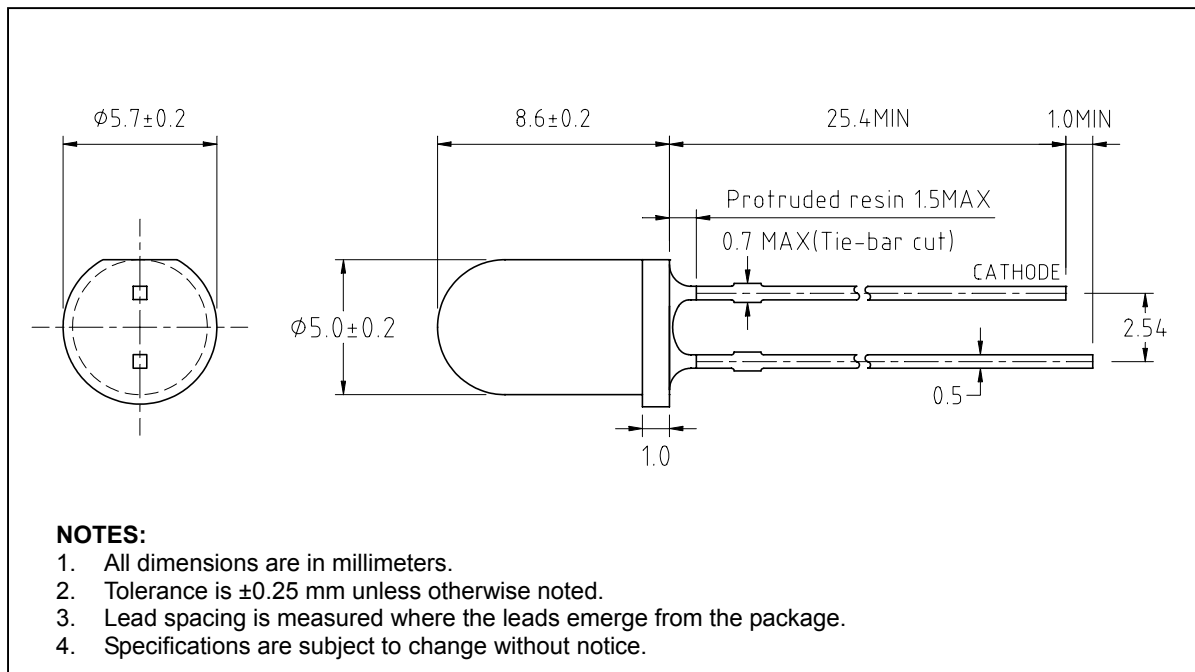

BEAM RADIATION PATTERN

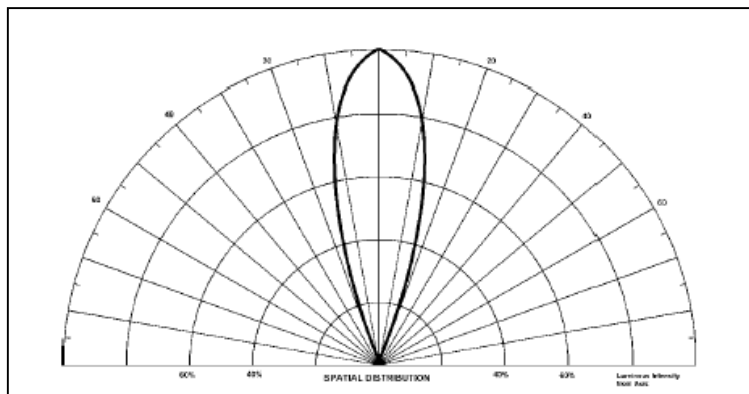

High Brightness Deep Blue LED Lamp

5mm Through-Hole Package

BL-LBDB5N30C series



ABSOLUTE MAXIMUM RATING (at $T_A = 25^\circ\text{C}$)

Parameter	Symbol	Value	Unit
Continuous Forward Current	I_F	30	mA
Peak Forward Current (1/10 Duty Cycle, 0.1msec Pulse width)	I_{Fp}	100	mA
Power Dissipation	P_d	120	mW
Forward Voltage	V_f	3.8	V
Reverse Voltage	V_R	5.0	V
Operating Temperature	T_{opr}	-40 to +85	$^\circ\text{C}$
Storage Temperature	T_{stg}	-45 to +100	$^\circ\text{C}$
Lead Soldering Temperature (1.6mm (0.063") from body)	260 $^\circ\text{C}$ for 5 seconds		

ELECTRICAL / OPTICAL CHARACTERISTICS (at $T_A = 25^\circ\text{C}$)

Parameter	Symbol	Min	Typ	Max	Unit
Forward Voltage	$I_F = 20\text{ mA}$ V_F		3.4	3.8	V
Radiant Intensity (on optical axis)	$I_F = 20\text{ mA}$ I_r		20		mW/sr
Luminous Intensity	$I_F = 20\text{ mA}$ I_v	200	550	650	mcd
Peak Wavelength	$I_F = 20\text{ mA}$ λ_p	440	450	460	nm
Spectrum Radiation Bandwidth	$I_F = 20\text{ mA}$ $\Delta\lambda$		28		nm
Viewing Angle	$2\theta_{1/2}$	25	30	35	deg
Reverse Current	$V_R = 5\text{ V}$ I_R		10	100	μA





High Brightness Deep Blue LED Lamp

5mm Through-Hole Package

BL-LBDB5N30C series



TYPICAL ELECTRICAL CHARACTERISTICS CURVES (at 20 mA DC / $T_A = 25^\circ\text{C}$)

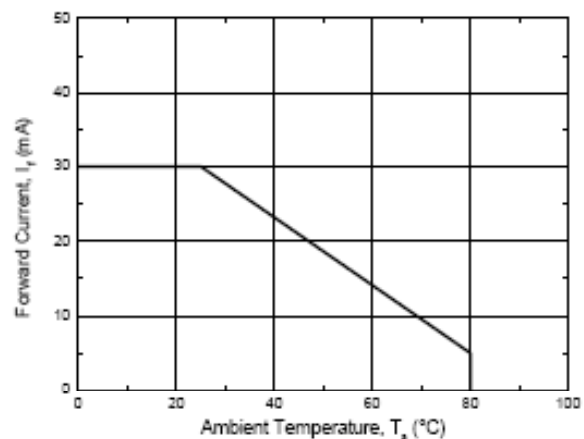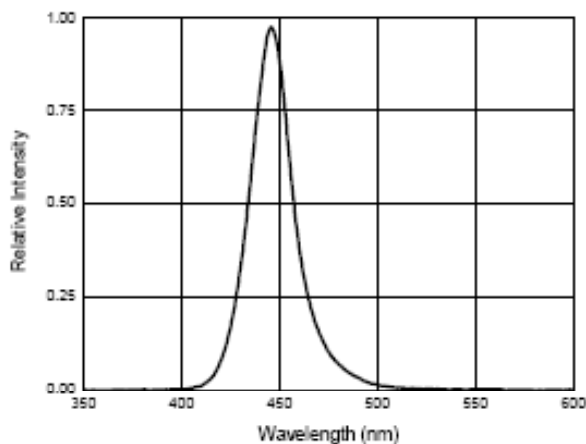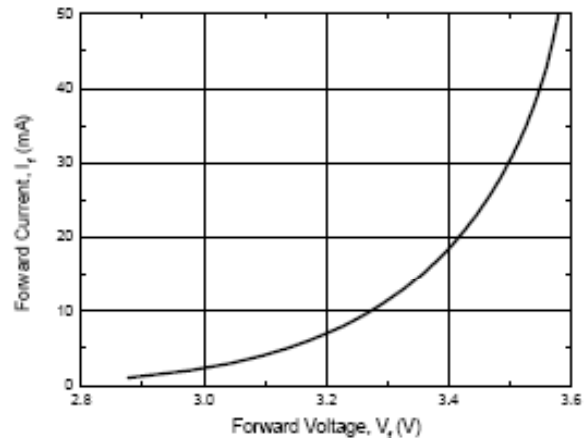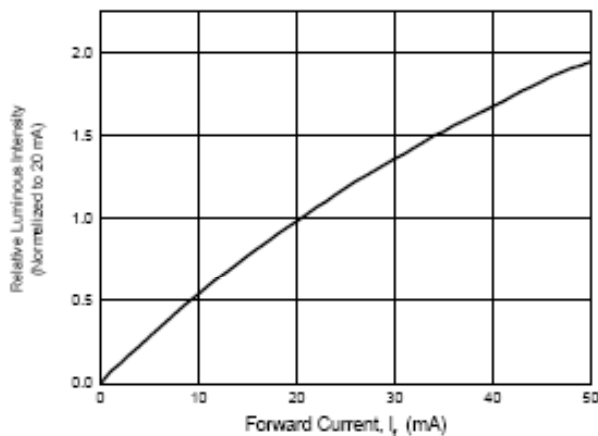

GENERAL NOTES:

1. Luminous Intensity (Iv) is measured with a light sensor and filter combination (goniospectroradiometer) and is the Luminous Flux per unit solid angle (steradian) emitted by the LED lamp in the direction of the mechanical axis of the lamp and then weighed by the eye response curve (1931 CIE 2° Observer Chromaticity Diagram).
2. Luminous Intensity measurement uncertainty is +/- 15% due to test procedures and equipment variations.
3. $\theta_{1/2}$ is the off-axis angle at which the luminous intensity is half the axial luminous intensity. Tolerance +/- 3°.
4. Dominant wavelength is derived from the 1931 CIE 2° Observer Chromaticity Diagram.
5. Peak and Dominant wavelength measurement uncertainty is +/- 0.05 due to variations.
6. Caution for ESD: Static Electricity and surges can damage the LED. It is recommended using a wristband or anti-electrostatic glove when handling the LED. All devices, equipment and machinery must be properly grounded.
7. Do not apply excess mechanical stress to the leads, especially when heated or while soldering.

High Brightness Deep Blue LED Lamp

5mm Through-Hole Package

BL-LBDB5N30C series



PRODUCT CODE BREAKDOWN

