STARSTRIP™ SERIES

STARSTRIP™

STARSTRIP™-24-RGB

Features

- RGB color-changing LED strip
- Wide view angle of up to 120°
- High brightness and long operating life
- Low energy consumption
- Common anode configuration
- Maximum length can be extended using the SS-COUPLER™

Available lengths: 33.6, 63.6, 93.6 and 123.6 cm.

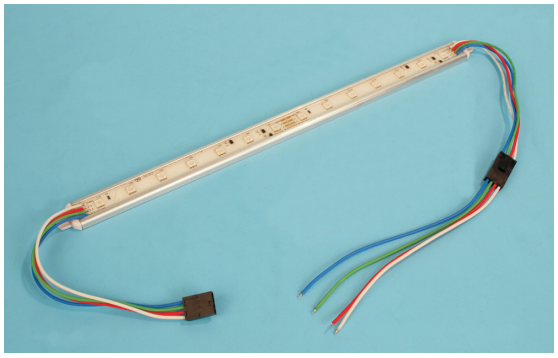

The STARSTRIP™-24-RGB is ideal for accent or cove lighting.

PRODUCT SPECIFICATIONS

Product Number:	STARSTRIP™-24-RGB
LED Type:	SMD RGB LED
Input Voltage:	24VDC
LED Luminous Intensity (Typ.):	R: 430mcd; G: 1000mcd; B: 230mcd
Emitting Color & Wavelength:	R: 622~630nm; G: 524~532nm; B: 464~472nm
Max. Watts/Unit:	3.4W
LED Quantity/Unit:	14 pcs
Unit Length:	33.6 cm
LED Spacing:	21.4 mm
Dimensions:	336mm x 21mm X 9mm
Beam Angle (Typ.):	120°
Color:	Any color available with RGB color mixing
Controller Model:	PAVO-DIAL-DMX
Max. units connected together:	45 units with the PAVO-DIAL-DMX Controller
Operation Temperature:	-20°C ~ 80°C
Power Supply: (Power Consumption for each meter = 10.2W)	15M: 153W/24VDC

DIMENSIONS

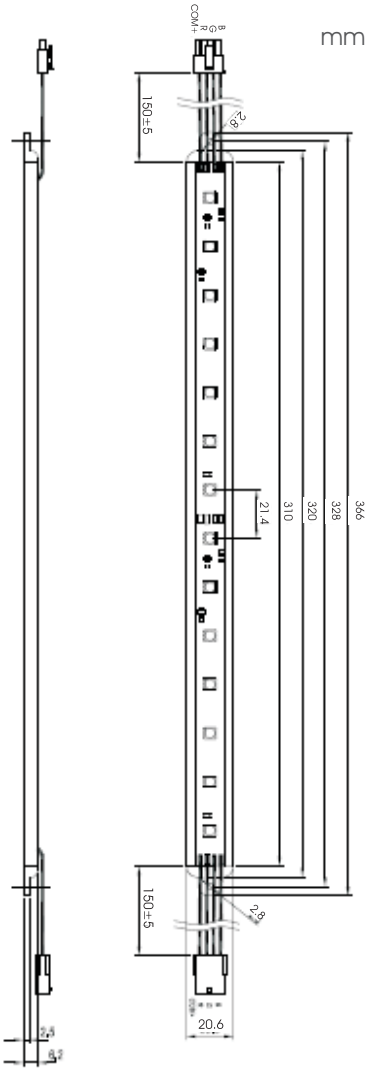

Ver: 20081103

Taiwan Operations:
Color Stars, Inc.
10F, No. 566 Jung Jeng Rd. Sindian City
Taipei County 231, Taiwan, R.O.C.
Tel: +886-2-8667-6600 Fax: +886-2-8667-1400
Email: sales@colorstars.com Website: www.colorstars.com

ColorStars Group

Headquarters:
ColorStars Group
300 Center Ave., Suite 202
Bay City, MI 48708 USA
Tel: 989-509-5924 Fax: 989-509-5924
Email: sales@colorstars.com Website: www.colorstars.com