# FoxUV<sup>TM</sup> LED 360nm 5mm Round



### FEATURES AND APPLICATIONS

- Deep UV wavelength, highly consistent
- HVPE epitaxy process, patent protected, unique in the industry
- UV lamps for industrial curing applications and medical/biomedical uses

### SPECIFICATIONS

### Absolute Maximum Rating (Ta = 25°C)


Item	Symbol	Maximum Rating	Unit	
DC Forward Current	$I_{f}$	30	mA	
Pulse Forward Current*	I <sub>fp</sub>	80	mA	
Reverse Voltage	Vr	5	V	
Operating Temperature	T <sub>opr</sub>	-20 to +80	°C	
Storage Temperature	T <sub>stg</sub>	-40 to +100	°C	

\*Condition: Duty Cycle: 1/10, Pulse Width: 10msec

Item	Symbol	Condition	Min	Тур.	Max	unit		
Forward Voltage	$V_{\rm f}$	I <sub>f</sub> =20mA	3.6	3.8	4.5	V		
Reverse Current	Ir	V <sub>r</sub> =5V	-	-	100	μA		
Peak Wavelength	λ <sub>p</sub>	I <sub>f</sub> =20mA	360	361	363	nm		
Viewing Angle		I <sub>f</sub> =20mA	-	15	-	deg.		
Output Power/Flux	Po	I <sub>f</sub> =20mA	300	750	1200	μW		

#### **Optical and Electrical Characteristics (Ta = 25°C)**


## Lamp Description (typical)

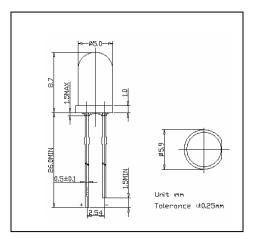

- Round epoxy lens, 5 mm (T-1 3/4 package), UV resistant
- Water clear

Rev.B, July 2006

Le Groupe Fox Inc. 200 Voyageur, Pointe-Claire, QC, Canada, H9R 6A8 Tel: (514)630-4305 Fax: (514)630-0227 sales@thefoxgroupinc.com

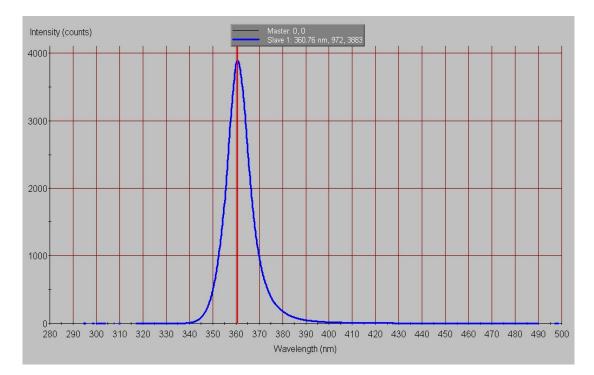

# **Typical Spectrum**

## Warnings and Handling Instructions

- UV LEDs emit intense but mainly invisible ultraviolet radiation when in operation, which may be harmful to eyes, even for brief periods.
- \* DO NOT LOOK DIRECTLY INTO THE UV LED DURING OPERATION \*
- \* BE SURE THAT YOU AND ALL PERSONS IN THE VICINITY WEAR SAFETY GOGGLES THAT PROVIDE SUITABLE UV PROTECTION WHEN A UV LED IS OPERATING \*
- \* KEEP CHILDREN AWAY FROM THE OPERATING VICINITY \*
- \* KEEP UV LEDs OUT OF THE REACH OF CHILDREN \*
- If you incorporate a UV LED into a product, be sure to provide appropriate cautionary labels and instructions.
- Please follow all standard procedures for storing, handling, cleaning, mounting, soldering, disposal, or otherwise handling LED dies or packaged LEDs, including static electricity protection.

Rev.B, July 2006

Le Groupe Fox Inc.

200 Voyageur, Pointe-Claire, QC, Canada, H9R 6A8 Tel: (514)630-4305 Fax: (514)630-0227 sales@thefoxgroupinc.com