


**TALEXconverter 0001 K010 24 V**  
Constant voltage converter

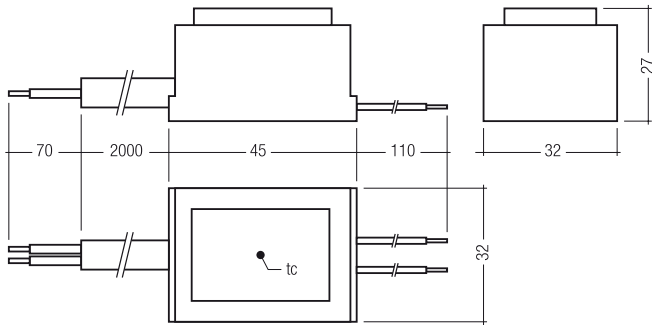

- constant voltage converter for TALEX modules
- safety class 2
- short-circuit-proof
- integrated DC-rectifier
- compact dimensions
- mounting by 2 tapping screws

- connection cable primary:  
cable H05RN-F, 2 x 1 mm<sup>2</sup>,  
black, 2 m, with end ferrules  
blue: neutral  
brown: phase
- connection cable secondary:  
length 100 mm, Ø 0.34 mm<sup>2</sup>, 10 mm tinned  
+ white / – black

**Packaging:**  
box of 20

**Designed according to:**  
EN 55015  
EN 61000-3-2  
EN 61547

type	TALEXconverter 0001 K010 24 V	
article number		86456625
primary voltage	V <sub>AC</sub>	230
primary voltage range	V <sub>AC</sub>	207-253
input current at 230 V 50 Hz	A	0.016
frequency	Hz	50
efficiency ①	%	> 40
secondary voltage ①	V <sub>DC</sub>	24
output power	W	1.5
ambient temperature t <sub>a</sub>	°C	-25 → +45
max. case temperature t <sub>c</sub>	°C	65
weight	g	220
dimensions (L x W x H)	mm	45 x 32 x 27
fixing centres (D)	mm	25

① at nominal load 1.5 W