


TALEXconverter K001 8/12/24V
Constant voltage converter

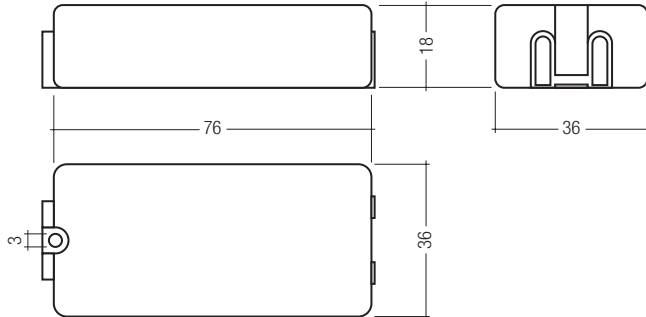

- constant voltage converter for TALEX modules
- short-circuit switch-off with automatic restart
- protection against overheating and overload by mains output power reduction
- safety class 2
- ingress protection IP 20
- compact dimensions
- connection cable with wire end ferrules
- for indoor use only
- housing: nylon natural white 66
- connection cable primary: 2x0.75 mm², H03VV H2-F, damaged cable must be replaced by authorised personnel length: 200 mm
- connection cable secondary: + red / - black length: 200 mm

Packaging:
box of 40

Designed according to:
EN 55015
EN 61000-3-2
EN 61347-1
EN 61547
EN 61558-2-17
DIN VDE 0710 T14

type		TALEXconverter 0007 K001 8V	TALEXconverter 0010 K001 12V	TALEXconverter 0010 K001 24V
article number		86453107	86453116	86453122
primary voltage	V _{Ac}	220–240	220–240	220–240
primary voltage range	V _{Ac}	198–254	198–254	198–254
primary voltage range	V _{Dc}	176–280	176–280	176–280
input current at 230V 50Hz	mA	80	93	95
frequency	Hz	0/50/60	0/50/60	0/50/60
efficiency	%	> 60	> 60	> 60
secondary voltage	V	8	12	24
output power	VA	1–7	1–10	1–10
ambient temperature t _a	°C	-25 → +50	-25 → +50	-25 → +50
max. case temperature t _c	°C	70	70	65
weight	g	50	50	50
dimensions LxWxH	mm	76x36x18	76x36x18	76x36x18