


**TALEXconverter 0025 K201 24V**  
Constant voltage converter

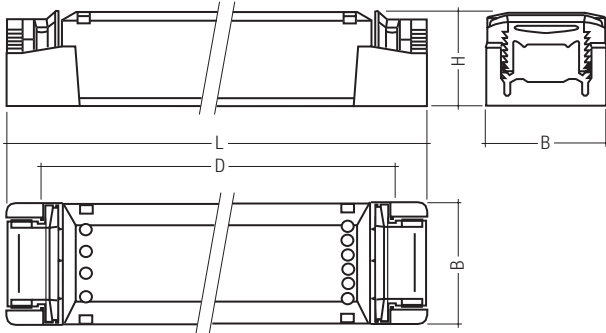

- constant voltage converter for TALEX modules
- short-circuit switch off with automatic restart
- safety class 2
- constant output voltage
- suitable for DC supply
- primary connection cable: H03VV-F, H05VV-F, cross section max. 2.5 mm<sup>2</sup>

- 6 pole terminal block on secondary side
- captive screw terminals
- tool free assembly of strain relief and terminal cover

**Packaging:**  
box of 20

**Designed according to:**  
EN 55015  
EN 61000-3-2  
EN 61000-3-3  
EN 61347-1  
EN 61347-2-13  
EN 61547  
EN 62384

type		TALEXconverter 0025 K201 24V
article number		86453418
primary voltage	V <sub>AC</sub>	230
primary voltage range	V <sub>AC</sub>	198-254
primary voltage range	V <sub>DC</sub>	200-240 (160 ①)
input current at 230V 50Hz	A	0.13
frequency	Hz	0/50/60
efficiency	%	> 82
secondary voltage	V <sub>DC</sub>	24
output power	W	25
ambient temperature t <sub>a</sub>	°C	-25 → +45
max. case temperature t <sub>c</sub>	°C	70
weight	kg	0.15
dimensions LxWxH	mm	167 x 42 x 31
fixing centres (D)	mm	143-148

① after power up with higher voltage, the device will work with a reduced voltage as specified above.