


TALEXconverter 0025 K210 24V one4all

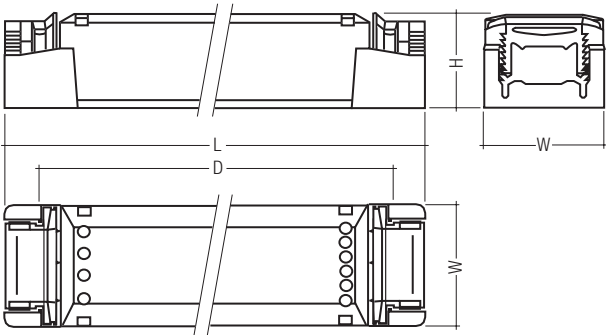

Highlights:

- 1 channel one4all converter for 24V TALEX RGB modules
- one4all control input: DSI, DALI and switchDIM
- dimming: 0.1–100 %
- tool free assembly of strain relief and terminal cover

Features:

- 1 addressable output channel
- 24V PWM output signal
- short-circuit switch-off with automatic restart
- over temperature protection
- safety class 2
- suitable for DC supply
- primary connecting cable: H03VV-F, H05VV-F, cross section max. 2.5 mm<sup>2</sup>

Packaging:  
box of 20

Designed according to:  
EN 55015  
EN 61000-3-2  
EN 61000-3-3  
EN 61347-1  
EN 61347-2-13  
EN 61547  
EN 62384

type		TALEXconverter 0025 K210 24V one4all
article number		86455937
primary voltage	V <sub>AC</sub>	230
primary voltage range	V <sub>AC</sub>	198–254
primary voltage range	V <sub>DC</sub>	200–240 (160 ①)
input current at 230V 50 Hz	A	0.13
frequency	Hz	0/50/60
efficiency	%	> 82
secondary voltage	V <sub>DC</sub>	24
output power	W	25
dimming signal	–	DSI, DALI, switchDIM
ambient temperature ta	°C	-25 → +45
max. case temperature tc	°C	70
weight	kg	0.15
dimensions LxWxH	mm	167x42x31
fixing centres (D)	mm	143–148

① After power up with higher voltage, the device will work with a reduced voltage as specified above.

