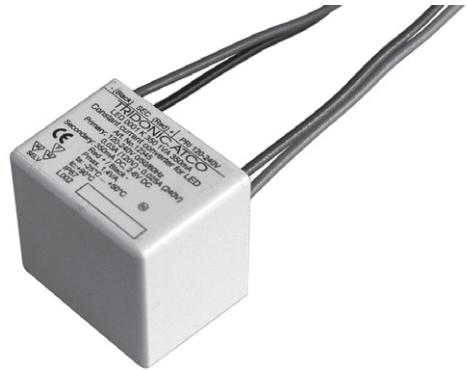
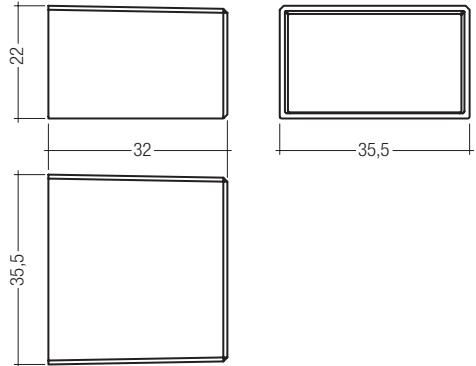


**TALEXconverter 0001 K350 1.5VA 350 mA**  
**Constant current converter**


- constant current converter 350 mA for TALEXeos modules
- constant output current 350 mA DC; ±5 %
- universal supply voltage range
- SELV
- over-temperature protection
- overload protection by limitation of output power


- compact housing for luminaire installation
- connection cable with wire end ferrules length: approx. 200 mm
- identification of polarity secondary: + red / - black
- white plastic housing – potted
- protection rating IP 67

**Packaging:**  
box of 20

**Designed according to:**  
EN 55015  
EN 61000-3-2  
EN 61000-3-3  
EN 61347-1  
EN 61347-2-13  
EN 61547  
EN 62384

type		TALEXconverter 0001 K350 1.5VA 350 mA
article number		24139068
primary voltage	V <sub>AC</sub>	120/230/240
primary voltage range	V <sub>AC</sub>	100-264
primary voltage range	V <sub>DC</sub>	120-240
input current at 230V 50Hz	A	0.08
frequency	Hz	0/50/60
efficiency	%	> 50
output current	A <sub>DC</sub>	0.350
secondary voltage	V <sub>DC</sub>	4
output power	W	1.4
ambient temperature ta	°C	-25 → +50
max. case temperature tc	°C	90
weight	g	100
dimensions LxWxH	mm	35.5 x 32 x 22

Wiring diagram TALEXconverter 0001 K350 with TALEXeos module

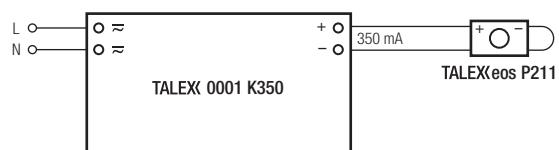

Number of TALEXeos modules connected to TALEXconverter 0001 K350

colour	P211	P214	P215	P216
red, amber	1	n.A.	n.A.	n.A.
green, blue, white	1	-	-	-