


TALEXconverter 0015 K350 15VA 350 mA
Constant current converter

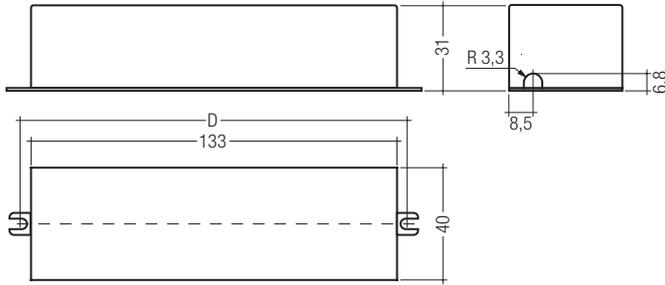

- constant current converter 350 mA for TALEXeos modules
- constant output current 350 mA DC; $\pm 5\%$
- universal supply voltage range
- SELV
- over-temperature protection
- overload protection by limitation of output power


- connection cable with wire end ferrules length: approx. 500 mm
- identification of polarity secondary: + red / - black
- white metal housing – potted
- protection rating IP 67

Packaging:
box of 20

Designed according to:
EN 55015
EN 61000-3-2
EN 61000-3-3
EN 61347-1
EN 61347-2-13
EN 61547
EN 62384

type		TALEXconverter 0015 K350 15VA 350 mA
article number		24139070
primary voltage	V _{AC}	120/230/240
primary voltage range	V _{AC}	100-264
primary voltage range	V _{DC}	120-240
input current at 230V 50Hz	A	0.25-1.0
frequency	Hz	0/50/60
efficiency at load > 5W	%	> 80
output current	A _{DC}	0.350
secondary voltage	V _{DC}	48
output power	W	15
ambient temperature t _a	°C	-25 → +50
max. case temperature t _c	°C	90
weight	g	300
dimensions LxWxH	mm	133 x 40 x 31
fixing centres (D)	mm	142

Wiring diagram TALEXconverter 0015 K350 with TALEXeos modules

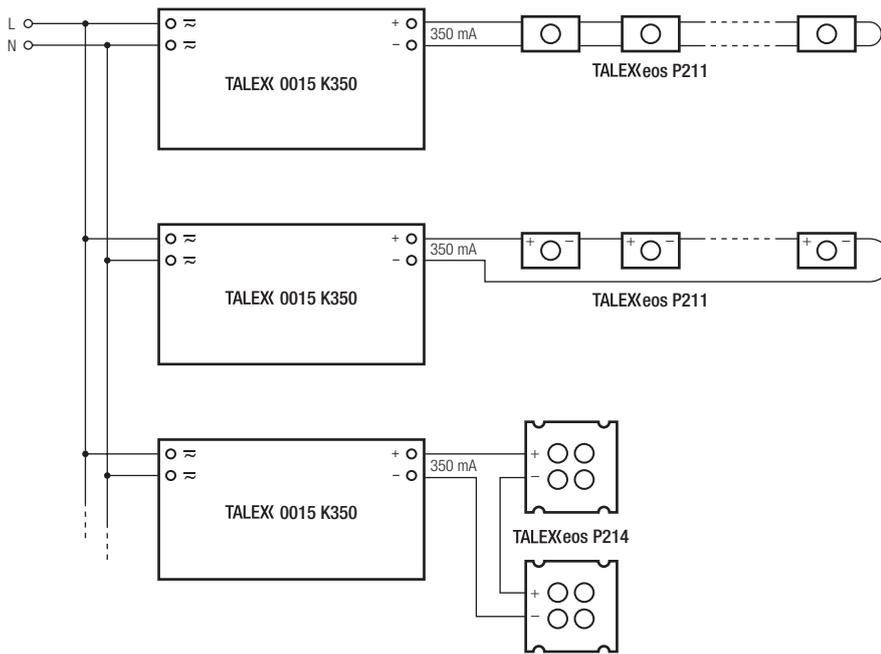

Number of TALEXeos modules connected to TALEXconverter 0015 K350

colour	P211	P214	P215	P216
red, amber	16	n.A.	n.A.	n.A.
green, blue, white	12	3	1	1



TALEXeos modules must be wired in series connection to the constant current converter TALEXconverter 0015 K350.