


SPECIFICATIONS FOR UPEC FLUX TYPE **YELLOW LED**

MODEL: UE-FR300NY0-1TP

Features

- High intensity
- General purpose leads
- Reliable and rugged

Package Dimensions

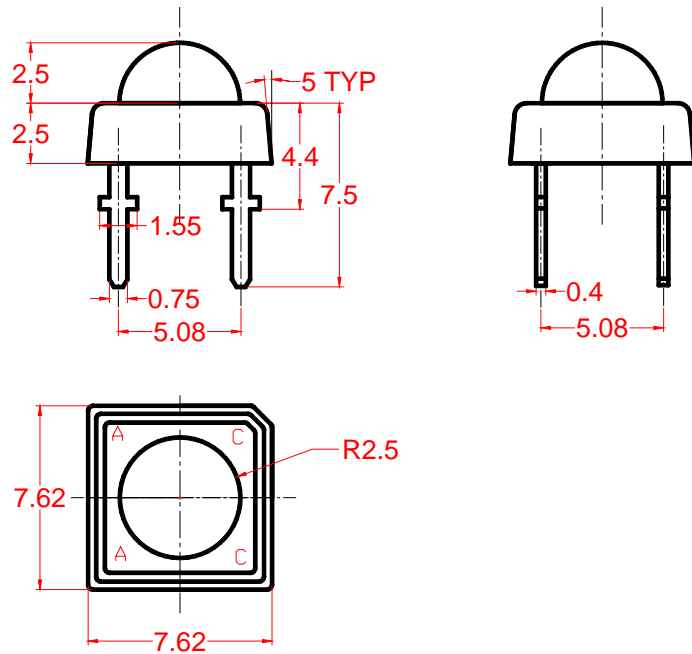

Part NO.	Chip Material	Lens Color	Source Color
UE-FR300NY0-1TP	AlGaInP	Water Clear	Yellow

Notes

1. All dimensions are in millimeters (inches).
2. Tolerance is $\pm 0.25\text{mm}$ (.010") unless otherwise noted.
3. Protruded resin under flange is 1.0mm (.04") max.
4. Lead spacing is measured where the leads emerge from the package.
5. Specifications are subject to change without notice.
6. Precautions for ESD:
 STATIC SHIELD Electricity and surge damages the LED. It is recommended to use a wrist band or anti-electrostatic glove when handling the LED. All devices, equipment and machinery must be properly grounded.
7. This data-sheet only valid for six months.

Mark	Date	Description Approve	Approved	Checked	Symbol	UPEC LED
-	DEC/17/04		Denny	Jerry	Name	UE-FR300NY0-1TP
					Drawing No	WIENDS351

Absolute Maximum Ratings at Ta=25

Parameter	Symbol	Max	Unit
Power Dissipation	PD	200	mW
Pulse Forward Current	IPF	500	mA
Forward Current	IF	70	mA
Reverse Voltage	VR	6	V
Operating Temperature Range	Topr	- 25 to + 85	°C
Storage Temperature Range	Tstg	- 40 to + 100	°C
Lead Soldering Temperature [1.6mm (0.063inch) From Body] 260 °C For 5 Seconds			

Electrical / Optical Characteristics at Ta=25

Parameter	Symbol	Min.	Typ.	Max.	Unit	Test Condition
Luminous Intensity	Iv	---	1400	---	mcd	I _f =70mA (Note 1)
Viewing Angle	2θ _{1/2}	---	80	---	Deg	(Note 2)
Dominant Wavelength	λ _d	---	590	---	nm	I _f =70mA (Note 3)
Forward Voltage	V _F	---	2.0	2.5	V	I _F = 70mA
Reverse Current	I _R	---	---	100	μA	V _R = 5V

BIN	---	---	---	---	---	---
Range	---	---	---	---	---	---

Measurement Uncertainty of the Luminous Intensity: ± 15%


Notes

- Luminous intensity is measured with a light sensor and filter combination that approximates the CIE eye-response curve.
- θ_{1/2} is the off-axis angle at which the luminous intensity is half the axial luminous intensity.
- The dominant wavelength (λ_d) is derived from the CIE chromaticity diagram and represents the single wavelength which defines the color of the device.


Mark	Date	Description Approve	Approved	Checked	Symbol	UPEC LED
-	DEC/17/04		Denny	Jerry	Name	UE-FR300NY0-1TP
					Drawing No	WIENDS351

Typical Electrical / Optical Characteristics Curves


Spectrum Distribution

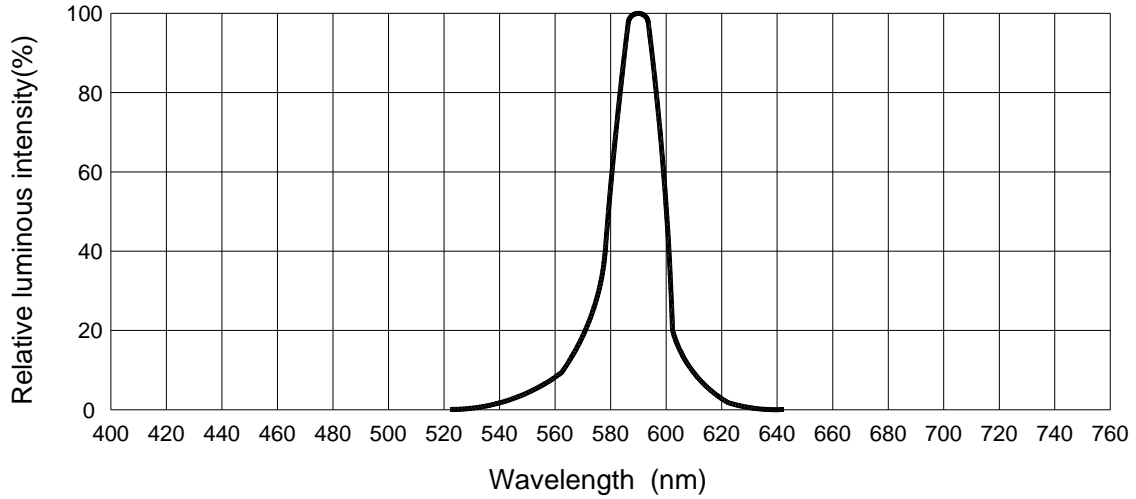


Forward Current VS. Forward Voltage

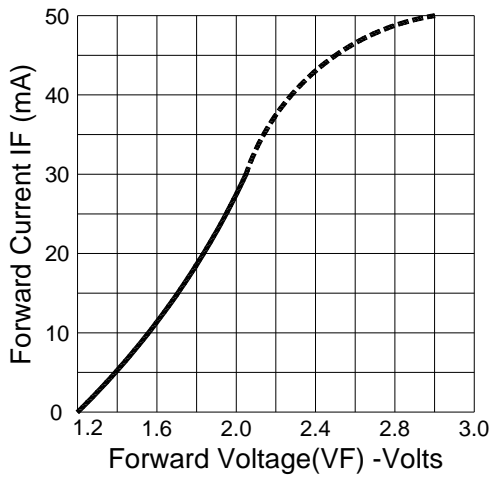


Luminous Intensity VS. Forward Current

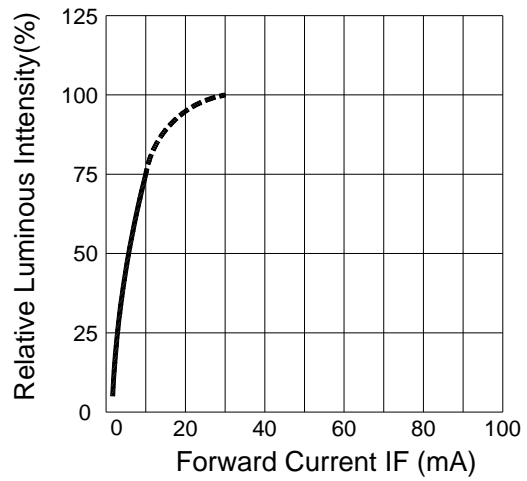

Forward Current VS. Ambient Temperature

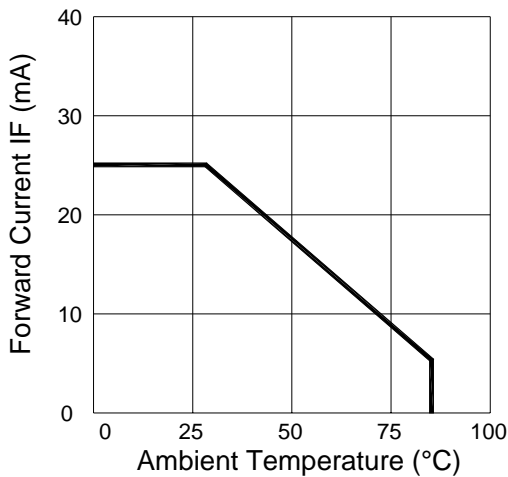

Radiation Diagram

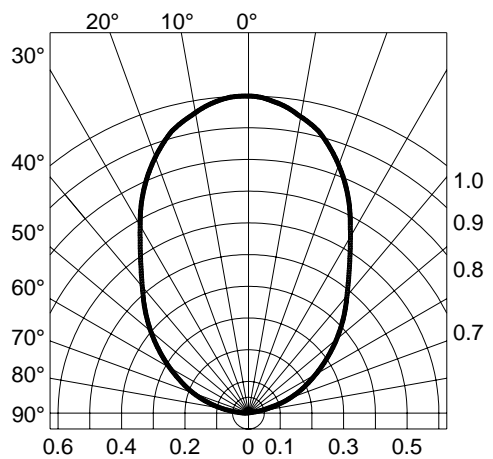

			Approved	Checked	Symbol	UPEC LED
			Denny	Jerry	Name	UE-FR300NY0-1TP
-	DEC/17/04				Drawing No	WIENDS351
Mark	Date	Description Approve				

Reliability Test Items and Conditions

No.	Item	Test Conditions	Test Hours / Cycle	Sample Q'ty	Ac/Re
1	Solder Heat	TEMP : 260 ±5	5 sec	22 pcs	0/1
2	Temperature Cycle	H : +85 30min. ∩ 5min. L : -35 30min.	50 cycle	22 pcs	0/1
3	Thermal Shock	H : +85 ∩ 5min. L : -35 5min.	50 cycle	22 pcs	0/1
4	High Temperature Storage	TEMP : 85	1000 hrs	22 pcs	0/1
5	Low Temperature Storage	TEMP : -35	1000 hrs	22 pcs	0/1
6	DC Operating Life	I _F = 20mA	1000 hrs	22 pcs	0/1
7	High Temperature / High Humidity	65 / 85 ~ 90% R.H.	1000 hrs	22 pcs	0/1

Judgment Criteria

Forward Voltage Vf	V _{fmax} Increase < 1.2x
Reverse Current Ir	I _{rmax} Increase < 2x
Luminous Intensity Iv	Iv Decay < 50%

Note : Measurement shall be taken after the tested samples have been returned to normal ambient conditions (generally after two hours)

			Approved	Checked	Symbol	UPEC LED
			Denny	Jerry	Name	UE-FR300NY0-1TP
-	DEC/17/04				Drawing No	WIENDS351
Mark	Date	Description Approve				