


**SPECIFICATIONS FOR UPEC LAMP TYPE GREEN LED**

**MODEL: UE-LR300PG0-1XB**

## Features

- High Luminous intensity
- Standard T-1 diameter package
- General purpose leads
- Reliable and rugged

## Package Dimensions

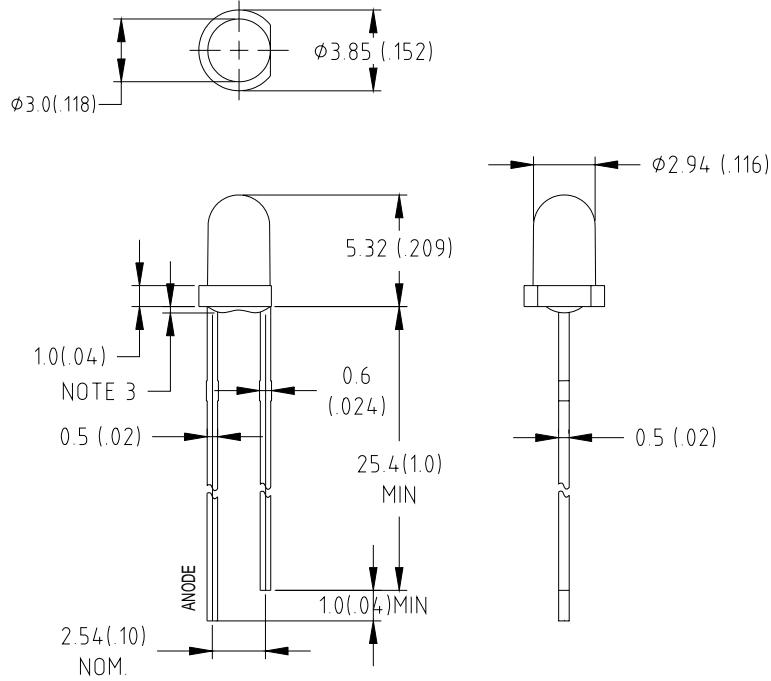

Part NO.	Chip Material	Lens Color	Source Color
UE-LR300PG0-1XB	InGaN	Water Clear	Green

## Notes

1. All dimensions are in millimeters (inches).
2. Tolerance is  $\pm 0.25\text{mm}$  (.010") unless otherwise noted.
3. Protruded resin under flange is 1.5mm (.06") max.
4. Lead spacing is measured where the leads emerge from the package.

Mark	Date	Description Approve	Approved	Checked	Symbol	UPEC LED
-	DEC/28/04		Joseph	Stone	Name	UE-LR300PG0-1XB
					Drawing No	WIENDS383

### Absolute Maximum Ratings at Ta=25

Parameter	Symbol	Max	Unit
Power Dissipation	PD	110	mW
Pulse Forward Current	IPF	100	mA
Forward Current	IF	30	mA
Reverse Voltage	VR	5	V
Operating Temperature Range	Topr	- 40 to + 80	°C
Storage Temperature Range	Tstg	- 40 to + 80	°C
Lead Soldering Temperature [ 1.6mm (0.063inch) From Body ] 260 °C For 5 Seconds			

### Electrical / Optical Characteristics at Ta=25

Parameter	Symbol	Min.	Typ.	Max.	Unit	Test Condition
Luminous Intensity	Iv	2200	3500	---	mcd	I <sub>f</sub> =20mA (Note 1)
Viewing Angle	2θ <sub>1/2</sub>	---	15	---	Deg	(Note 2)
Dominant Wavelength	λ <sub>d</sub>	---	525	---	nm	I <sub>f</sub> =20mA (Note 3)
Forward Voltage	V <sub>F</sub>	---	3.5	4.0	V	I <sub>F</sub> = 20mA
Reverse Current	I <sub>R</sub>	---	---	100	μA	V <sub>R</sub> = 5V

BIN	LR	LS	LT	---	---	---
Range	2200-3500	3500-4900	4900---	---	---	---

Measurement Uncertainty of the Luminous Intensity: ± 15%

Measurement Uncertainty of the Dominant Wavelength: ±1nm


Measurement Uncertainty of the Forward Voltage: ±0.1V

### Notes


- Luminous intensity is measured with a light sensor and filter combination that approximates the CIE eye-response curve.
- θ<sub>1/2</sub> is the off-axis angle at which the luminous intensity is half the axial luminous intensity.
- The dominant wavelength (λ<sub>d</sub>) is derived from the CIE chromaticity diagram and represents the single wavelength which defines the color of the device.

Mark	Date	Description Approve	Approved	Checked	Symbol	UPEC LED
-	DEC/28/04		Joseph	Stone	Name	UE-LR300PG0-1XB
					Drawing No	WIENDS383


# Typical Electrical / Optical Characteristics Curves

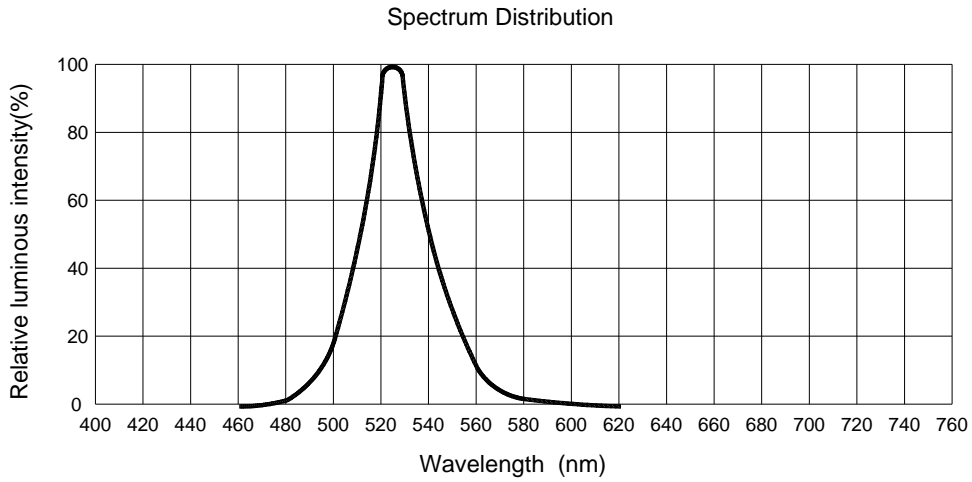


Forward Current VS. Forward Voltage

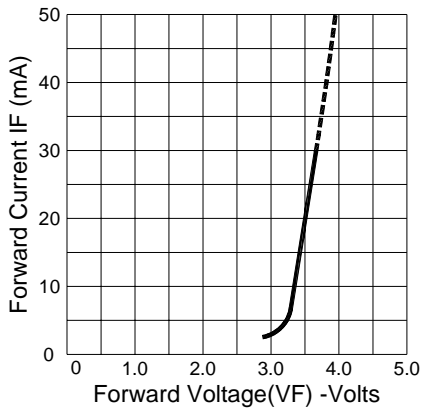


Luminous Intensity VS. Forward Current

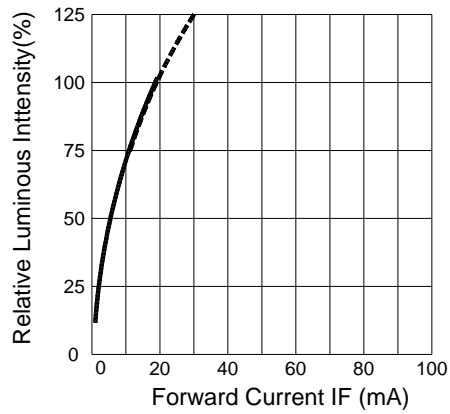

Forward Current VS. Ambient Temperature

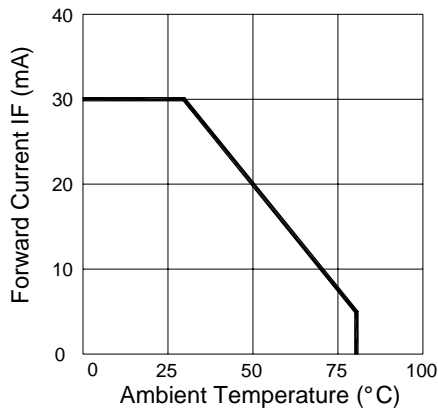

Radiation Diagram

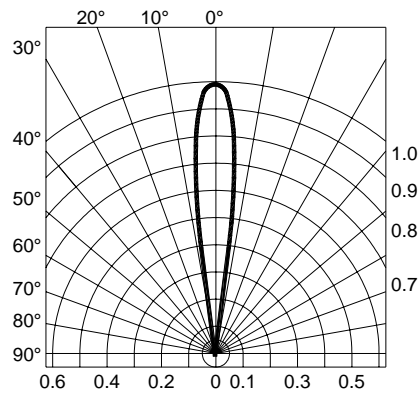

			Approved	Checked	Symbol	UPEC LED
			Joseph	Stone	Name	UE-LR300PG0-1XB
-	DEC/28/04				Drawing No	WIENDS383
Mark	Date	Description Approve				

### Reliability Test Items and Conditions

No.	Item	Test Conditions	Test Hours / Cycle	Sample Q'ty	Ac/Re
1	Solder Heat	TEMP : 260 ±5	5 sec	22 pcs	0/1
2	Temperature Cycle	H : +85 30min. ∩ 5min. L : -35 30min.	50 cycle	22 pcs	0/1
3	Thermal Shock	H : +85 ∩ 5min. L : -35 5min.	50 cycle	22 pcs	0/1
4	High Temperature Storage	TEMP : 85	1000 hrs	22 pcs	0/1
5	Low Temperature Storage	TEMP : -35	1000 hrs	22 pcs	0/1
6	DC Operating Life	I <sub>F</sub> = 20mA	1000 hrs	22 pcs	0/1
7	High Temperature / High Humidity	65 / 85 ~ 90% R.H.	1000 hrs	22 pcs	0/1

#### Judgment Criteria

Forward Voltage V <sub>f</sub>	V <sub>f_max</sub> Increase < 1.2x
Reverse Current I <sub>r</sub>	I <sub>r_max</sub> Increase < 2x
Luminous Intensity I <sub>v</sub>	I <sub>v</sub> Decay < 50%

Note : Measurement shall be taken after the tested samples have been returned to normal ambient conditions (generally after two hours)

			Approved	Checked	Symbol	UPEC LED
			Joseph	Stone	Name	UE-LR300PG0-1XB
					Drawing No	WIENDS383
Mark	Date	Description Approve				