



# UF5400G THRU UF5408G

3.0 AMPS. GLASS PASSIVATED ULTRA FAST RECTIFIERS



## FEATURES

- \* Glass Passivated junction
- \* Low forward voltage drop
- \* High current capability
- \* High reliability
- \* High surge current capability

## MECHANICAL DATA

- \* Case: Molded plastic
- \* Epoxy: UL 94V-0 rate flame retardant
- \* Lead: Axial leads, solderable per MIL-STD-202, method 208 guaranteed
- \* Polarity: Color band denotes cathode end
- \* Mounting Position: Any
- \* Weight: 1.18 grams


## VOLTAGE RANGE

50 to 800 Volts

CURRENT

3.0 Amperes

## DO-201AD

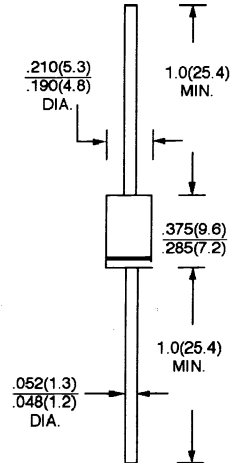

Dimensions in inches and ( millimeters)

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%

TYPE NUMBER	SYMBOLS	UF 5400G	UF 5401G	UF 5402G	UF 5404G	UF 5406G	UF 5407G	UF 5408G	UNITS	
Maximum Recurrent Peak Reverse Voltage	$V_{RRM}$	50	100	200	400	600	800	1000	V	
Maximum RMS Voltage	$V_{RMS}$	35	70	140	280	420	560	700	V	
Maximum D. C Blocking Voltage	$V_{DC}$	50	100	200	400	600	800	1000	V	
Maximum Average Forward Rectified Current .375"(9.5mm) lead length @ $T_A = 50^\circ\text{C}$ (Note 1)	$I_{F(AV)}$	3.0							A	
Peak Forward Surge Current, 8.3 ms single half sine-wave superimposed on rated load(JEDEC method)	$I_{FSM}$	100							A	
Maximum Instantaneous Forward Voltage at 3.0A (Note 1)	$V_F$	1.1			1.4				V	
Maximum D. C Reverse Current @ $T_A = 25^\circ\text{C}$ at Rated D. C Blocking Voltage @ $T_A = 125^\circ\text{C}$	$I_R$	10.0				200				$\mu\text{A}$ $\mu\text{A}$
Maximum Reverse Recovery Time(Note 2)	$T_{RR}$	50				75				nS
Typical Junction Capacitance (Note 3)	$C_J$	80				50				pF
Operating and Storage Temperature Range	$T_J, T_{STG}$	- 65 to + 150							$^\circ\text{C}$	



NOTES: 1. Each Lead mounted on a  $0.8 \times 0.8 \times 0.04$ " ( $20 \times 20 \times 1\text{mm}$ ) copper heat - sink.

2. Reverse Recovery Test Conditions:  $I_F = 0.5\text{A}$ ,  $I_R = 1.0\text{A}$ ,  $I_{RR} = 0.25\text{A}$ .


3. Measured at 1 MHz and applied reverse voltage of 4.0V D. C.

# RATINGS AND CHARACTERISTIC CURVES (UF5400G THRU UF5408G)


**FIG. 1 - TEST CIRCUIT DIAGRAM AND REVERSE RECOVERY TIME CHARACTERISTICS**

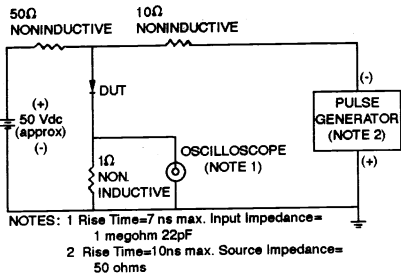


**FIG. 2 - TYPICAL FORWARD CURRENT DERATING CURVE**




**FIG. 3 - TYPICAL REVERSE CHARACTERISTICS**

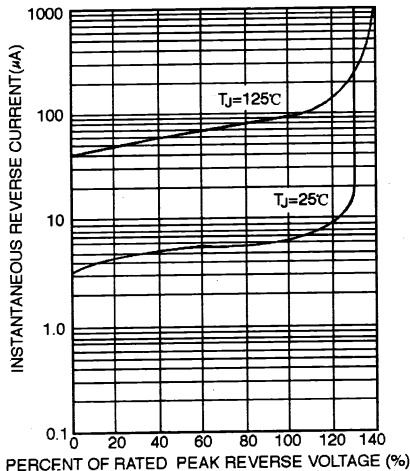

**FIG. 4 - TYPICAL FORWARD CHARACTERISTICS**

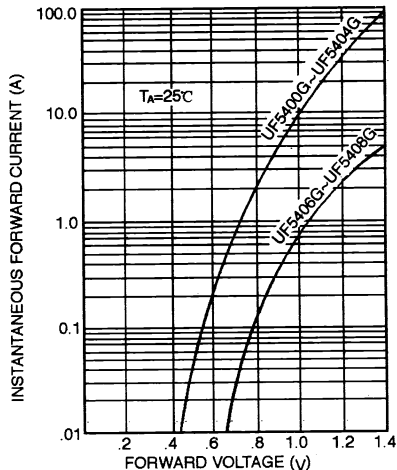

**FIG. 5 - MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT**

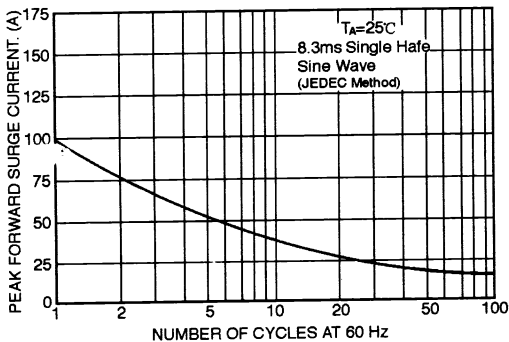

**FIG. 6 - TYPICAL JUNCTION CAPACITANCE**

